

Klaus Mollenhauer · Helmut Tschoeke

---

Handbook of Diesel Engines

Klaus Mollenhauer · Helmut Tschoeke

# Handbook of Diesel Engines

With 584 Figures and 86 Tables

 Springer

*Editors*

Prof. Dr.-Ing. Klaus Mollenhauer  
Orber Str. 25  
14193 Berlin  
Germany  
Klamoll@aol.com

Prof. Dr.-Ing. Helmut Tschoeke  
Otto von Guericke University Magdeburg  
Institute of Mobile Systems  
Universitätsplatz 2  
39106 Magdeburg  
Germany  
helmut.tschoeke@ovgu.de

*Translator*

Krister G. E. Johnson  
Otto-von-Guericke-Strass 56 b  
39104 Magdeburg  
Germany

ISBN 978-3-540-89082-9 e-ISBN 978-3-540-89083-6

DOI 10.1007/978-3-540-89083-6

Springer Heidelberg Dordrecht London New York

Library of Congress Control Number: 2010924045

© Springer-Verlag Berlin Heidelberg 2010

This work is subject to copyright. All rights are reserved, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilm or in any other way, and storage in data banks. Duplication of this publication or parts thereof is permitted only under the provisions of the German Copyright Law of September 9, 1965, in its current version, and permission for use must always be obtained from Springer. Violations are liable to prosecution under the German Copyright Law.

The use of general descriptive names, registered names, trademarks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

*Cover design:* WMXDesign GmbH, Heidelberg

Printed on acid-free paper

Springer is part of Springer Science+Business Media ([www.springer.com](http://www.springer.com))

# Preface

*This machine is destined to completely revolutionize engine engineering and replace everything that exists.* (From Rudolf Diesel's letter of October 2, 1892 to the publisher Julius Springer.)

Although Diesel's stated goal has never been fully achievable of course, the diesel engine indeed revolutionized drive systems. This handbook documents the current state of diesel engine engineering and technology. The impetus to publish a Handbook of Diesel Engines grew out of ruminations on Rudolf Diesel's transformation of his idea for a rational heat engine into reality more than 100 years ago. Once the patent was filed in 1892 and work on his engine commenced the following year, Rudolf Diesel waited another 4 years until the Association of German Engineers provided him a platform to present his engine to the public at its convention in Kassel on June 16, 1897. The engine came to bear the name of its ingenious inventor soon thereafter.

The editors and publisher intend this English edition of the handbook to furnish readers outside German-speaking regions a scholarly and practical presentation of the current state of the diesel engine and its large range of applications. The handbook has not only been conceived for diesel experts but also "diesel laypersons" with prior knowledge of engineering or at least an interest in technology. Furthermore, it is intended to benefit students desiring a firsthand comprehensive and sound overview of diesel engine engineering and technology and its state of development.

These aims are reflected in the book's five-part structure. Part I provides a brief history of the diesel engine followed by sections on the fundamentals, including supercharging systems, diesel engine combustion, fuels and modern injection systems. Parts II–IV treat the loading and design of selected components, diesel engine operation, the pollution this causes and the increasingly important measures to reduce it. Part V presents the entire range of engines from small single

cylinder diesel engine up through large low speed two-stroke diesel engines. An appendix lists the most important standards and regulations for diesel engines.

Further development of diesel engines as economizing, clean, powerful and convenient drives for road and nonroad use has proceeded quite dynamically in the last twenty years in particular. In light of limited oil reserves and the discussion of predicted climate change, development work continues to concentrate on reducing fuel consumption and utilizing alternative fuels while keeping exhaust as clean as possible as well as further increasing diesel engine power density and enhancing operating performance. Development is oriented toward the basic legal conditions, customer demands and, not least, competition with gasoline engines, which are still considered the benchmark car engine in many sectors.

The topics to be treated were weighed with all this in mind: In addition to engine internal measures that reduce exhaust emissions with the aid of new combustion systems and new fuels, the section on *Exhaust Gas Aftertreatment* deserves particular mention. The oxidation catalytic converters introduced in the car sector as standard in the 1990s will soon no longer meet the mounting requirements for air hygiene; particulate filters and nitrogen oxide reduction systems, e.g. SCR and storage catalysts, have become standard.

New combustion systems with a larger share of premixed, homogeneous combustion than normal diffusion combustion are just as much the subject of this handbook as the refinement of supercharging to enhance the power output, increase the peak cylinder pressure and thus limit load as the brake mean effective pressure increases. Quickly emerging as the optimal injection system when the car sector switched from indirect to direct injection at the end of the 1990s, the common rail system also came to be used – initially only experimentally – for larger diesel engines at the start of the new millennium. The common rail system is now standard in diesel engines

of virtually every size. Hence, reflecting current but by far not yet finalized development, this handbook treats the different designs, e.g. with solenoid valve-controlled or piezo-actuated injectors, in detail. Ample space has accordingly also been given to electronics with its diverse options to control processes in the engine.

To be able meet the expectations and demands connected with a Handbook of Diesel Engines, we relied as much on the collaboration of outstanding engineers from the engine industry as on the research findings of professors at universities of applied sciences and universities. After all, a particularly close connection has existed between theory and practice, between academia and industry, in engine research since Diesel's day, his invention itself being based on the engineering of his day.

Thanks to the work of many generations of engineers, scientists, researchers and professors, the diesel engine continues to be the most cost effective internal combustion engine and has evolved into an advanced high-tech product.

Berlin, Germany,  
Magdeburg, Germany  
September 2009

We would like to thank all the authors – whether experts working in industry where the utmost dedication is demanded or our colleagues in academia where the days of creative leisure have long since become a thing of the past – for their collaboration, their ready acceptance of our ideas and the many fruitful discussions. We would also like to extend our gratitude to the companies that allowed their employees to work on the side, supported the compilation of texts and master illustrations and provided material. Acknowledgement is also due the many helpers at companies and institutes for their contributions without which such an extensive book manuscript could never have been produced.

Particularly special thanks go to the Diesel Systems Division at Robert Bosch GmbH for the technical and financial support, which made it possible to complete this extensive work in the first place.

Despite the sometimes hectic pace and considerable additional work, the editors tremendously enjoyed their collaboration with the authors, the publisher and all the other collaborators.

*Klaus Mollenhauer  
Helmut Tschoeke*

*My engine continues to make great advances. . . .* (From Rudolf Diesel's letter of July 3, 1895 to his wife.)

# Contents

<b>Contributors</b> . . . . .	IX	5.2 Injection Nozzles and Nozzle Holders . . . . .	129
<b>Part I The Diesel Engine Cycle</b> . . . . .	1	5.3 Injection Systems . . . . .	137
<b>1 History and Fundamental Principles of the Diesel Engine</b> ( <i>Klaus Mollenhauer and Klaus Schreiner</i> ) . . . . .	3	5.4 Injection System Metrology . . . . .	170
1.1 The History of the Diesel Engine . . . . .	3	Literature . . . . .	173
1.2 Fundamentals of Engine Engineering . . . . .	7	Further Literature . . . . .	173
1.3 Combustion Cycle Simulation . . . . .	18	Further Literature on Section 5.2 . . . . .	174
Literature . . . . .	29	<b>6 Fuel Injection System Control Systems</b> ( <i>Ulrich Projahn, Helmut Randoll, Erich Biermann, Jörg Brückner, Karsten Funk, Thomas Küttner, Walter Lehle, and Joachim Zuern</i> ) . . . . .	175
<b>2 Gas Exchange and Supercharging</b> ( <i>Helmut Pucher</i> ) . . . . .	31	6.1 Mechanical Control . . . . .	175
2.1 Gas Exchange . . . . .	31	6.2 Electronic Control . . . . .	176
2.2 Diesel Engine Supercharging . . . . .	38	6.3 Sensors . . . . .	184
2.3 Programmed Gas Exchange Simulation . . . . .	56	6.4 Diagnostics . . . . .	186
Literature . . . . .	59	6.5 Application Engineering . . . . .	189
<b>3 Diesel Engine Combustion</b> ( <i>Klaus B. Binder</i> ) . . . . .	61	Literature . . . . .	191
3.1 Mixture Formation and Combustion . . . . .	61	Further Literature . . . . .	191
3.2 Design Features . . . . .	69	<b>Part II Diesel Engine Engineering</b> . . . . .	193
3.3 Alternative Combustion Processes . . . . .	73	<b>7 Engine Component Loading</b> ( <i>Dietmar Pinkernell and Michael Bargende</i> ) . . . . .	195
3.4 Process Simulation of Injection Characteristic and Rate of Heat Release . . . . .	74	7.1 Mechanical and Thermal Loading of Components . . . . .	195
Literature . . . . .	75	7.2 Heat Transfer and Thermal Loads in Engines . . . . .	202
<b>4 Fuels</b> ( <i>Gerd Hagenow, Klaus Reders, Hanns-Erhard Heinze, Wolfgang Steiger, Detlef Zigan, and Dirk Mooser</i> ) . . . . .	77	Literature . . . . .	217
4.1 Automotive Diesel Fuels . . . . .	77	Further Literature . . . . .	219
4.2 Alternative Fuels . . . . .	94	<b>8 Crankshaft Assembly Design, Mechanics and Loading</b> ( <i>Eduard Köhler, Eckhart Schopf, and Uwe Mohr</i> ) . . . . .	221
4.3 Operation of Marine and Stationary Engines with Heavy Fuel Oil . . . . .	103	8.1 Designs and Mechanical Properties of Crankshaft Assemblies . . . . .	221
4.4 Fuel Gases and Gas Engines . . . . .	114	8.2 Crankshaft Assembly Loading . . . . .	228
Literature . . . . .	124	8.3 Balancing of Crankshaft Assembly Masses . . . . .	236
<b>5 Fuel Injection Systems</b> ( <i>Walter Egler, Rolf Jürgen Giersch, Friedrich Boecking, Jürgen Hammer, Jaroslav Hlousek, Patrick Mattes, Ulrich Projahn, Winfried Urner, and Björn Janetzky</i> ) . . . . .	127	8.4 Torsional Crankshaft Assembly Vibrations . . . . .	250
5.1 Injection Hydraulics . . . . .	127	8.5 Bearings and Bearing Materials . . . . .	259
		8.6 Piston, Piston Rings and Piston Pins . . . . .	270
		Literature . . . . .	287
		Further Literature . . . . .	290

<b>9 Engine Cooling</b> ( <i>Klaus Mollenhauer and Jochen Eitel</i> ) . . . . .	291	15.2 Emission Control Legislation . . . . .	426
9.1 Internal Engine Cooling . . . . .	291	15.3 Pollutants and Their Production . . . . .	443
9.2 External Engine Cooling Systems . . . . .	309	15.4 In-Engine Measures for Pollutant Reduction . . . . .	449
Literature . . . . .	336	15.5 Exhaust Gas Aftertreatment . . . . .	455
<b>10 Materials and Their Selection</b> ( <i>Johannes Betz</i> ) . . . . .	339	15.6 Emissions Testing . . . . .	469
10.1 The Importance of Materials for Diesel Engines . . . . .	339	Literature . . . . .	483
10.2 Technical Materials for Engine Components . . . . .	339	Further Literature . . . . .	485
10.3 Factors for Material Selection . . . . .	348	<b>16 Diesel Engine Noise Emission</b> ( <i>Bruno M. Spessert and Hans A. Kochanowski</i> ) . . . . .	487
10.4 Service Life Concepts and Material Data . . . . .	348	16.1 Fundamentals of Acoustics . . . . .	487
10.5 Service Life Enhancing Processes . . . . .	349	16.2 Development of Engine Noise Emission . . . . .	487
10.6 Trends in Development . . . . .	352	16.3 Engine Surface Noise . . . . .	489
Literature . . . . .	354	16.4 Aerodynamic Engine Noises . . . . .	498
Further Literature . . . . .	355	16.5 Noise Reduction by Encapsulation . . . . .	499
<b>Part III Diesel Engine Operation</b> . . . . .	357	16.6 Engine Soundproofing . . . . .	502
<b>11 Lubricants and the Lubrication System</b> ( <i>Hubert Schwarze</i> ) . . . . .	359	Literature . . . . .	502
11.1 Lubricants . . . . .	359	<b>Part V Implemented Diesel Engines</b> . . . . .	505
11.2 Lubrication Systems . . . . .	370	<b>17 Vehicle Diesel Engines</b> ( <i>Fritz Steinparzer, Klaus Blumensaat, Georg Paehr, Wolfgang Held, and Christoph Teetz</i> ) . . . . .	507
Literature . . . . .	376	17.1 Diesel Engines for Passenger Cars . . . . .	507
<b>12 Start and Ignition Assist Systems</b> ( <i>Wolfgang Dressler and Stephan Ernst</i> ) . . . . .	377	17.2 Diesel Engines for Light Duty Commercial Vehicles . . . . .	521
12.1 Conditions for the Auto-Ignition of Fuel . . . . .	377	17.3 Diesel Engines for Heavy Duty Commercial Vehicles and Buses . . . . .	528
12.2 Fuel Ignition Aids . . . . .	378	17.4 High Speed High Performance Diesel Engines . . . . .	544
12.3 Start and Ignition Assist Systems . . . . .	379	Literature . . . . .	556
12.4 Cold Start, Cold Running Performance and Cold Running Emissions for Cars . . . . .	383	Further Literature . . . . .	557
12.5 Conclusion . . . . .	386	<b>18 Industrial and Marine Engines</b> ( <i>Günter Kampichler, Heiner Bülte, Franz Koch, and Klaus Heim</i> ) . . . . .	559
Literature . . . . .	386	18.1 Small Single Cylinder Diesel Engines . . . . .	559
Further Literature . . . . .	386	18.2 Stationary and Industrial Engines . . . . .	568
<b>13 Intake and Exhaust Systems</b> ( <i>Oswald Parr, Jan Krüger, and Leonhard Vilser</i> ) . . . . .	387	18.3 Medium Speed Four-Stroke Diesel Engines . . . . .	576
13.1 Air Cleaners . . . . .	387	18.4 Two-Stroke Low Speed Diesel Engines . . . . .	592
13.2 Exhaust Systems . . . . .	393	Literature . . . . .	607
Literature . . . . .	398	<b>Standards and Guidelines for Internal Combustion Engines</b> . . . . .	609
Further Literature . . . . .	399	<b>Index</b> . . . . .	621
<b>14 Exhaust Heat Recovery</b> ( <i>Franz Hirschbichler</i> ) . . . . .	401		
14.1 Basics of Waste Heat Recovery . . . . .	401		
14.2 Options of Waste Heat Recovery . . . . .	404		
Literature . . . . .	413		
<b>Part IV Environmental Pollution by Diesel Engines</b> . . . . .	415		
<b>15 Diesel Engine Exhaust Emissions</b> ( <i>Helmut Tschoeke, Andreas Graf, Jürgen Stein, Michael Krüger, Johannes Schaller, Norbert Breuer, Kurt Engeljehring, and Wolfgang Schindler</i> ) . . . . .	417		
15.1 General Background . . . . .	417		

# Contributors

- Michael Bargende*, Prof. Dr.-Ing., Universität Stuttgart, Stuttgart, Germany, michael.bargende@ivk.uni-stuttgart.de
- Johannes Betz*, MTU Friedrichshafen GmbH, Friedrichshafen, Germany, johannes.betz@mtu-online.com
- Erich Biermann*, Dr.-Ing., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, erich.biermann@de.bosch.com
- Klaus B. Binder*, Prof. Dr.-Ing., Deizisau, Germany, klaus.b.binder@t-online.de
- Klaus Blumensaat*, Volkswagen AG, Wolfsburg, Germany, klaus.blumensaat@volkswagen.de
- Friedrich Boecking*, Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, friedrich.boecking@de.bosch.com
- Norbert Breuer*, Dr.-Ing., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, norbert.breuer@de.bosch.com
- Jörg Brückner*, Dr., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, joerg.brueckner@de.bosch.com
- Heiner Bülte*, Dr.-Ing., Deutz AG, Köln, Germany, buelte.h@deutz.com
- Wolfgang Dressler*, Dr., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, wolfgang.dressler@de.bosch.com
- Walter Egler*, Dr.-Ing., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, walter.egler@de.bosch.com
- Jochen Eitel*, Behr GmbH & Co. KG, Stuttgart, Germany, jochen.eitel@behrgroup.com
- Kurt Engeljehring*, AVL List GmbH, Graz, Austria, kurt.engeljehring@avl.com
- Stephan Ernst*, Dr.-Ing., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, stephan.ernst@de.bosch.com
- Karsten Funk*, Dr.-Ing., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, karsten.funk@de.bosch.com
- Rolf Jürgen Giersch*, Dipl.-Ing., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, juergen.giersch@de.bosch.com
- Andreas Graf*, Dipl.-Ing., Daimler AG, Stuttgart, Germany, andreas.g.graf@daimler.com
- Gerd Hagenow*, Dr., Shell Global Solutions (Deutschland) GmbH, Hamburg, Germany
- Jürgen Hammer*, Dr.-Ing., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, juergen.hammer@de.bosch.com
- Klaus Heim*, Wärtsilä Switzerland Ltd, Winterthur, Switzerland, klaus.heim@wartsila.com
- Hanns-Erhard Heinze*, Dr.-Ing., Magdeburg, Germany, cheheinze@gmx.de
- Wolfgang Held*, Dr.-Ing., MAN Nutzfahrzeuge AG, Nürnberg, Germany, wolfgang.held@man.eu
- Franz Hirschbichler*, Dr., München, Germany, franz.hirschbichler@gmx.de
- Jaroslav Hlousek*, Dipl.-Ing., KEFICO Co, Gunpo, Korea (RoK), jaroslav.hlousek@kr.bosch.com
- Björn Janetzky*, Dr.-Ing., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, bjoern.janetzky@de.bosch.com
- Günter Kampichler*, Dipl.-Ing., Ruhstorf, Germany
- Franz Koch*, Dr.-Ing., MAN Diesel & Turbo SE, Augsburg, Germany, franz.koch@man.eu
- Hans A. Kochanowski*, Dr.-Ing., Ruhstorf, Germany
- Eduard Köhler*, Prof. Dr.-Ing. habil., KS Aluminium Technologie GmbH, Neckarsulm, Germany, eduard.koehler@de.kspg.com
- Jan Krüger*, Dr.-Ing., J. Eberspächer GmbH & Co. KG, Esslingen, Germany, jan.krueger@eberspaecher.com
- Michael Krüger*, Dr.-Ing., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, michael.krueger2@de.bosch.com
- Thomas Küttner*, Dipl.-Ing., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, thomas.kuettner@de.bosch.com
- Walter Lehle*, Dr. rer. nat., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, walter.lehle@de.bosch.com
- Patrick Mattes*, Dr., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, patrick.mattes@de.bosch.com
- Uwe Mohr*, Dr., Mahle GmbH, Stuttgart, Germany, uwe.mohr@mahle.com
- Klaus Mollenhauer*, Prof. Dr.-Ing., Berlin, Germany, klamoll@aol.com
- Dirk Mooser*, Dr.-Ing., Caterpillar Motoren GmbH & Co. KG, Kiel, Germany, mooser\_dirk@CAT.com
- Georg Paehr*, Dr., Volkswagen AG, Wolfsburg, Germany, georg.paehr@volkswagen.de
- Oswald Parr*, Dr.-Ing., Ludwigsburg, Germany
- Dietmar Pinkernell*, MAN Diesel & Turbo SE, Augsburg, Germany
- Ulrich Projahn*, Dr.-Ing., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, ulrich.projahn@de.bosch.com



- Helmut Pucher*, Prof. Dr.-Ing., Technische Universität Berlin, Berlin, Germany, hegre.pucher@t-online.de
- Helmut Randoll*, Dr. rer. nat., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, helmut.randoll@de.bosch.com
- Klaus Reders*, Dipl.-Ing., Shell Global Solutions (Deutschland) GmbH, Hamburg, Germany, klausredershh@t-online.de
- Johannes Schaller*, Dr., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, johannes.schaller@de.bosch.com
- Wolfgang Schindler*, Dr., AVL List GmbH, Graz, Austria, wolfgang.schindler@avl.com
- Eckhart Schopf*, Dr.-Ing., Wiesbaden, Germany
- Klaus Schreiner*, Prof. Dr.-Ing., HTGW Konstanz (University of Applied Sciences), Konstanz, Germany, schreiner@htgw-konstanz.de
- Hubert Schwarze*, Prof. Dr.-Ing., TU Clausthal, Clausthal-Zellerfeld, Germany, schwarze@itr.tu-clausthal.de
- Bruno M. Spessert*, Prof. Dr.-Ing., FH Jena (University of Applied Sciences), Jena, Germany, bruno.spessert@fh-jena.de
- Wolfgang Steiger*, Dr.-Ing., Volkswagen AG, Wolfsburg, Germany, wolfgang.steiger@volkswagen.de
- Jürgen Stein*, Daimler AG, Stuttgart, Germany, hj.stein@daimler.com
- Fritz Steinparzer*, BMW Group, München, Germany, fritz.steinparzer@bmw.com
- Christoph Teetz*, Dr.-Ing., MTU Friedrichshafen GmbH, Friedrichshafen, Germany, christoph.teetz@mtu-online.de
- Helmut Tschoeke*, Prof. Dr.-Ing., Otto von Guericke Universität Magdeburg, Magdeburg, Germany, helmut.tschoeke@ovgu.de
- Winfried Urner*, Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, winfried.urner@de.bosch.com
- Leonhard Vilser*, Dr.-Ing., J. Eberspächer GmbH & Co. KG, Esslingen, Germany, leonhard.vilser@eberspaecher.com
- Detlef Zigan*, Dr.-Ing., Kiel, Germany, detlefzigan@hotmail.com
- Joachim Zuern*, Dipl.-Ing., Robert Bosch GmbH, Diesel Systems, Stuttgart, Germany, joachim.zuern@de.bosch.com

# Units and Conversion Factors

Quantity	Symbol	Unit		Conversion factors	
		US Customary	Metric (SI)	Metric → US	US → Metric
Force	F	Pound-force (lbf)	Newton (N)	1 N = 0.2248 lbf	1 lbf = 4.4482 N
Weight		Pound-weight (lbw)			
Length	s	inch (in)	mm	1 mm = 0.03937 in	1 in = 25.4 mm
		foot (ft)	Meter (m)	1 m = 3.2808 ft	1 ft = 0.3048 m
		mile (mi)	km	1 km = 0.62137 mi	1 mi = 1.6093 km
Mass	m	pound (lbm)	Kilogramm (kg)	1 kg = 2.2046 lb	1 lb = 0.4536 kg
Power	P	horsepower (hp)	Kilowatt (kW)	1 kW = 1.341 hp	1 hp = 0.7457 kW
Pressure	p	lb/sq in (psi)	bar, Pascal (Pa)	1 bar = 14.504 psi	1 psi = 6895 Pa = 0.06895 bar
Specific fuel consumption	sfc	lbm/hp h	g/kWh	1 g/kWh = 0.001644 lb/hp h	1 lb/hp h = 608.277 g/kWh
Temperature	T	°Fahrenheit (°F)	°Celsius (°C)	$T_{°C} = 5/9 (T_{°F} - 32)$	$T_{°F} = 9/5 T_{°C} + 32$
		Rankine (R)	Kelvin (K)		
Torque	T	ft lbf	Nm	1 Nm = 0.7376 ft lbf	1 ft lbf = 1.3548 Nm
Velocity	v	ft/s	m/s	1 m/s = 3.28 ft/s	1 ft/s = 0.305 m/s
		mi/h	km/h	1 km/h = 0.6214 mi/h	1 mi/h = 1.6093 km/h
Volume	V	gallon (gal)	liter (l)	1 l = 0.2642 gal	1 gal = 3.785 l
			cm <sup>3</sup>		
			m <sup>3</sup>		
Work, Energy	W	ft lbf	Joule (J)	1 J = 0.7376 ft lbf	1 ft lbf = 1.3558 J
		British thermal unit (Btu)	kWh	1 kWh = 3412.1 Btu	1 Btu = 2.9307 × 10 <sup>-4</sup> kWh

# Part I      The Diesel Engine Cycle

1	History and Fundamental Principles of the Diesel Engine . . . . .	3
2	Gas Exchange and Supercharging . . . . .	31
3	Diesel Engine Combustion . . . . .	61
4	Fuels . . . . .	77
5	Fuel Injection Systems . . . . .	127
6	Fuel Injection System Control Systems . . . . .	175

# 1 History and Fundamental Principles of the Diesel Engine

Klaus Mollenhauer and Klaus Schreiner

## 1.1 The History of the Diesel Engine

On February 27, 1892, the engineer Rudolf Diesel filed a patent with the Imperial Patent Office in Berlin for a “new rational heat engine”. On February 23, 1893, he was granted the patent DRP 67207 for the “Working Method and Design for Combustion Engines” dated February 28, 1892. This was an important first step toward the goal Diesel had set himself, which, as can be gathered from his biography, had preoccupied him since his days as a university student.

Rudolf Diesel was born to German parents in Paris on March 18, 1858. Still a schoolboy when the Franco-Prussian War of 1870–1871 broke out, he departed by way of London for Augsburg where he grew up with foster parents. Without familial and financial backing, young Rudolf Diesel was compelled to take his life into his own hands and contribute to his upkeep by, among other things, giving private lessons. Scholarships ultimately enabled him to study at the Polytechnikum München, later the Technische Hochschule, from which he graduated in 1880 as the best examinee ever up to that time.

There, in Professor Linde’s lectures on the theory of caloric machines, the student Diesel realized that the steam engine, the dominant heat engine of the day, wastes a tremendous amount of energy when measured against the ideal energy conversion cycle formulated by Carnot in 1824 (see Sect. 1.2). What is more, with efficiencies of approximately 3%, the boiler furnaces of the day emitted annoying smoke that seriously polluted the air.

Surviving lecture notes document that Diesel already contemplated implementing the Carnot cycle as a student, if possible by directly utilizing the energy contained in coal without steam as an intermediate medium. While working at Lindes Eismaschinen, which brought him from Paris to Berlin, he also ambitiously pursued the idea of a rational engine, hoping his invention would bring him financial independence together with social advancement. He ultimately

filed and was granted the aforementioned patent [1-1] with the following claim 1:

Working method for combustion engines characterized by pure air or another indifferent gas (or steam) with a working piston compressing pure air so intensely in a cylinder that the temperature generated as a result is far above the ignition temperature of the fuel being used (curve 1-2 of the diagram in Fig. 2), whereupon, due to the expelling piston and the expansion of the compressed air (or gas) triggered as a result (curve 2-3 of the diagram in Fig. 2), the fuel is supplied so gradually from dead center onward that combustion occurs without significantly increasing pressure and temperature, whereupon, after the supply of fuel is terminated, the mass of gas in the working cylinder expands further (curve 3-4 of the diagram in Fig. 2).


Once the gas has been decompressed to the discharge pressure, heat dissipates along the isobars 4-1 (Fig. 1-1), thus ending the cycle.

A second claim asserts patent protection of multistage compression and expansion. Diesel proposed a three cylinder compound engine (Fig. 1-2). Adiabatic compression occurs in two high pressure cylinders 2, 3 operating offset at  $180^\circ$  and the fuel (Diesel initially spoke of coal dust) supplied by the hopper B in top dead center auto-ignites so that isothermal combustion and expansion occur, which turns adiabatic after combustion ends. The combustion gas is transferred into the double-acting center cylinder 1 where it completely expands to ambient pressure and is expelled after the reversal of motion at the same time as the isothermal precompression by water injection or the preceding intake of the fresh charge for the second engine cycle that runs parallel. Thus, one cycle occurs per revolution.

To implement the Carnot cycle, Diesel reverted to the four-stroke cycle considered “state-of-the-art” since Nikolaus Otto’s day. He believed isothermal combustion at a maximum of  $800^\circ\text{C}$  would enable him to keep the thermal load in the engine low enough that it would run without cooling. This limiting temperature requires compressions of approximately 250 at with which Diesel far surpassed the “state-of-the-art”: On the one hand, this gave the “outsider” Diesel the naiveté

---

K. Mollenhauer (✉)  
Berlin, Germany  
e-mail: Klamoll@aol.com

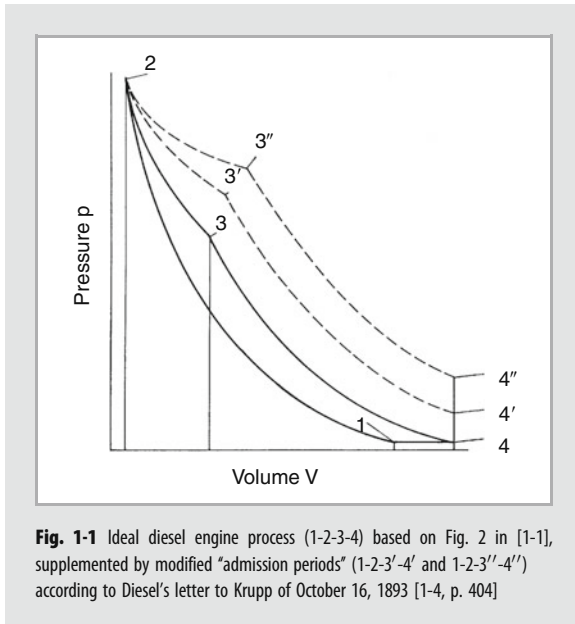

necessary to implement his idea. On the other hand, firms experienced in engine manufacturing such as the Deutz gas engine factory shied away from Diesel's project.

Conscious that "an invention consists of two parts: The idea and its implementation" [1-2], Diesel wrote a treatise on the "Theory and Design of a Rational Heat Engine" [1-3] and sent it to professors and industrialists as well as Deutz at the turn of 1892–1893 to propagate his ideas and win over industry: With a Carnot efficiency of approximately 73% at 800°C, he expected maximum losses of 30 to 40% in real operation, which would correspond to a net efficiency of 50% [1-3, p. 51].

After nearly a year of efforts and strategizing, Diesel finally concluded a contract in early 1893 with the renowned Maschinenfabrik Augsburg AG headed by Heinrich Buz, a leading manufacturer of steam engines. The contract contained Diesel's concessions to an ideal engine: The maximum pressure was lowered from 250 to at and later 30 at, the compound engine's three cylinders were reduced to one high pressure cylinder and coal dust was abandoned as the fuel. Two other heavy machinery manufacturers, Krupp and, soon thereafter, Sulzer entered into the contract, which was lucrative for Diesel.

Construction of the first uncooled test engine with a stroke of 400 mm and a bore of 150 mm was begun in Augsburg early in the summer of 1893. Although petroleum was the intended fuel, gasoline was first injected in a powered engine on August 10, 1893 under the misguided assumption it would ignite more easily: The principle of auto-ignition was indeed confirmed even though the indicator burst at pressures over 80 bar!

Selected indicator diagrams (Fig. 1-3) make it possible to follow the further developments: Once the first engine, which


was later provided water cooling, had been modified, the fuel could no longer be injected directly. Rather, it could only be injected, atomized and combusted with the aid of compressed air. The first time the hitherto powered engine idled on February 17, 1894, it became autonomous. Finally, a first braking test was performed on June 26, 1895: Using petroleum as fuel and externally compressed injection air, an indicated efficiency of  $\eta_i = 30.8\%$  and a net efficiency of  $\eta_e = 16.6\%$  were measured at a consumption of 382 g/HPH.

Only a revised design, the third test engine [1-4] furnished with a single stage air pump, delivered the breakthrough though: Professor Moritz Schröter from the Technische Hochschule München conducted acceptance tests on February 17, 1897. Together with Diesel and Buz, he presented the results at a general meeting of the Association of German Engineers in Kassel on June 16, 1897, thus introducing the first heat engine with an efficiency of 26.2%, which was sensational in those days [1-5]!

It necessitated abandoning the isothermal heat input claimed in the original patent: In light of the narrow region of the diagram proportional to indicated work and the frictional losses to be expected as a result of the high pressures, even Diesel must have realized no later than when he plotted the theoretical indicator diagrams (Fig. 1-4) that the engine would not perform any effective work. Taking great pains not to jeopardize the basic patent, he gave thought early on to prolonging the "admission period", i.e. raising the line of isothermal heat input in the  $p, V$  diagram (Fig. 1-1). A second application for a patent (DRP 82168) on November 29, 1893 also cited the constant pressure cycle, which was considered consistent with the basic patent because of its "insubstantial pressure increase". The patent granted overlooked the fact that, contrary to the basic patent, both the mass of the fuel and the maximum temperature increased!

Unsurprisingly, Diesel and the Diesel consortium were soon embroiled in patent disputes in Kassel. According to the charge, Diesel's engine did not fulfill any of his patent claims: The engine was unable to run without cooling and expansion did not occur without substantially increasing pressure and temperature as a function of compression. Only the auto-ignition mentioned in claim 1 took place. Yet, just as Diesel never admitted that his engine did not complete any phase of the Carnot cycle, he vehemently denied to the end that auto-ignition was a basic characteristic of his invention [1-4, p. 406].

The additional charge that coal dust was not employed was less weighty [1-5, 1-6]: Especially since his engine was intended to replace the steam engine, Diesel, a nineteenth century engineer, was at first unable to circumvent coal, the primary source of energy in his day. However, he did not rule out other fuels as later tests, even with vegetable oils among other things, prove [1-2]. Measured against the "state-of-the-art" of the day, nobody, not even Diesel, could have known which fuel was best suited for the Diesel engine. Documented by many draft designs, his ingeniously intuitive grasp of the

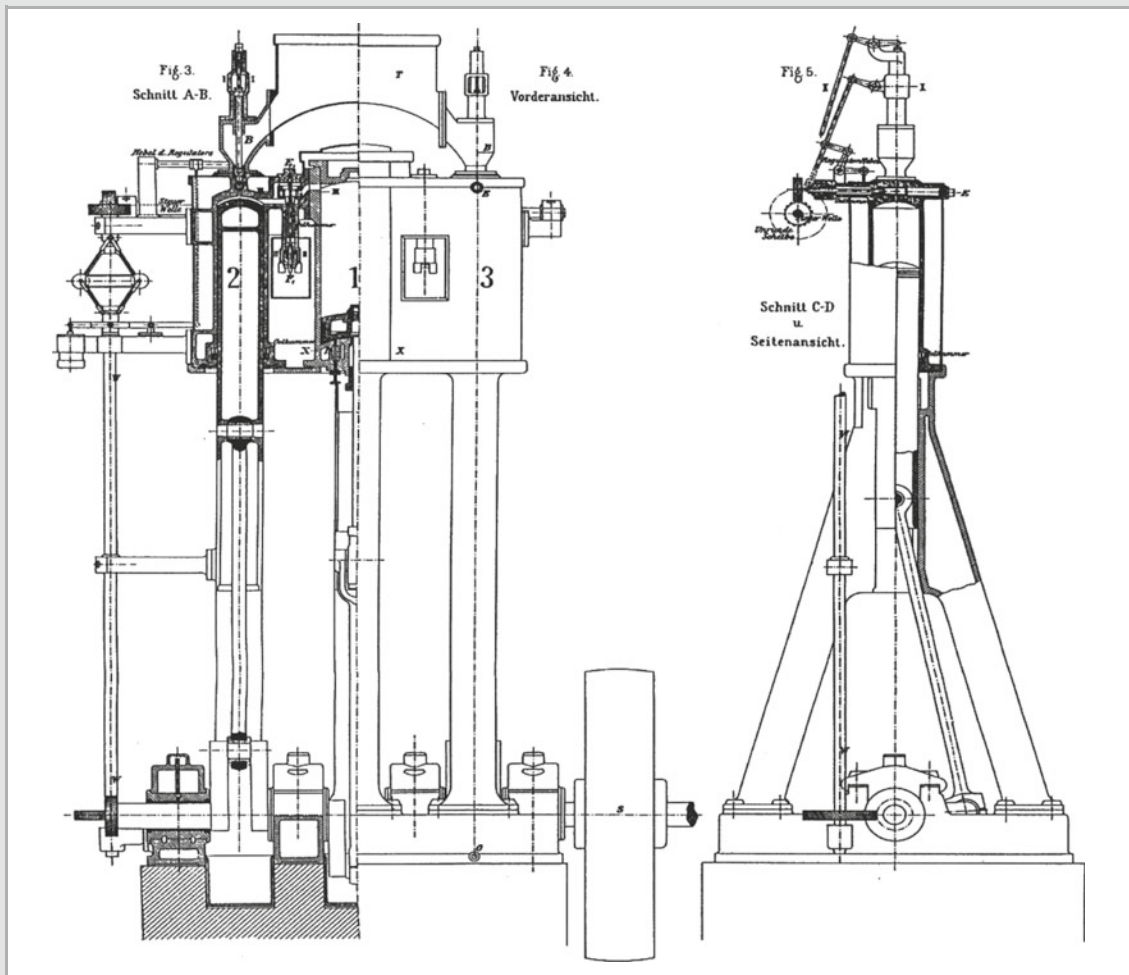


**Fig. 1-2** Diesel's design of a compound engine [1-3]

diesel engine's combustion cycles, which were largely unfamiliar to him then and are often only detectable with advanced measurement and computer technology today (see Sect. 3), is all the more admirable (Fig. 1-5).

In addition to successfully weathered patent disputes, the Diesel engine's path continued to be overshadowed by conflicts between the inventor and the Diesel consortium: The latter was interested in profitably "marketing" the engine intended to replace stationary and ship steam engines as soon as possible [1-7]. First, the marketability prematurely asserted in Kassel had to be established. This was done, above all, thanks to the skill and dogged commitment of Immanuel Lauster in Augsburg. It also pre-saged the line of development of "high performance diesel engines" (Table 1-1).

On the other hand, principally interested in distributed energy generation [1-3, pp. 89ff] and thus anticipating cogeneration unit technology and modern developments in railroad engineering [1-8] that quite realistically envision satellite remote controlled, automatically guided boxcars [1-3], Rudolf Diesel considered the heavy test engine with its A-frame borrowed together with the crosshead engine from steam engine engineering to only be a preliminary stage on the way to a lightweight "compressorless" diesel engine.

The end of Diesel's development work at Maschinenfabrik Augsburg was marked by the reluctantly conceded construction of a compound engine unable to fulfill the hopes placed in it and a few tentative tests of coal dust and other alternative fuels.

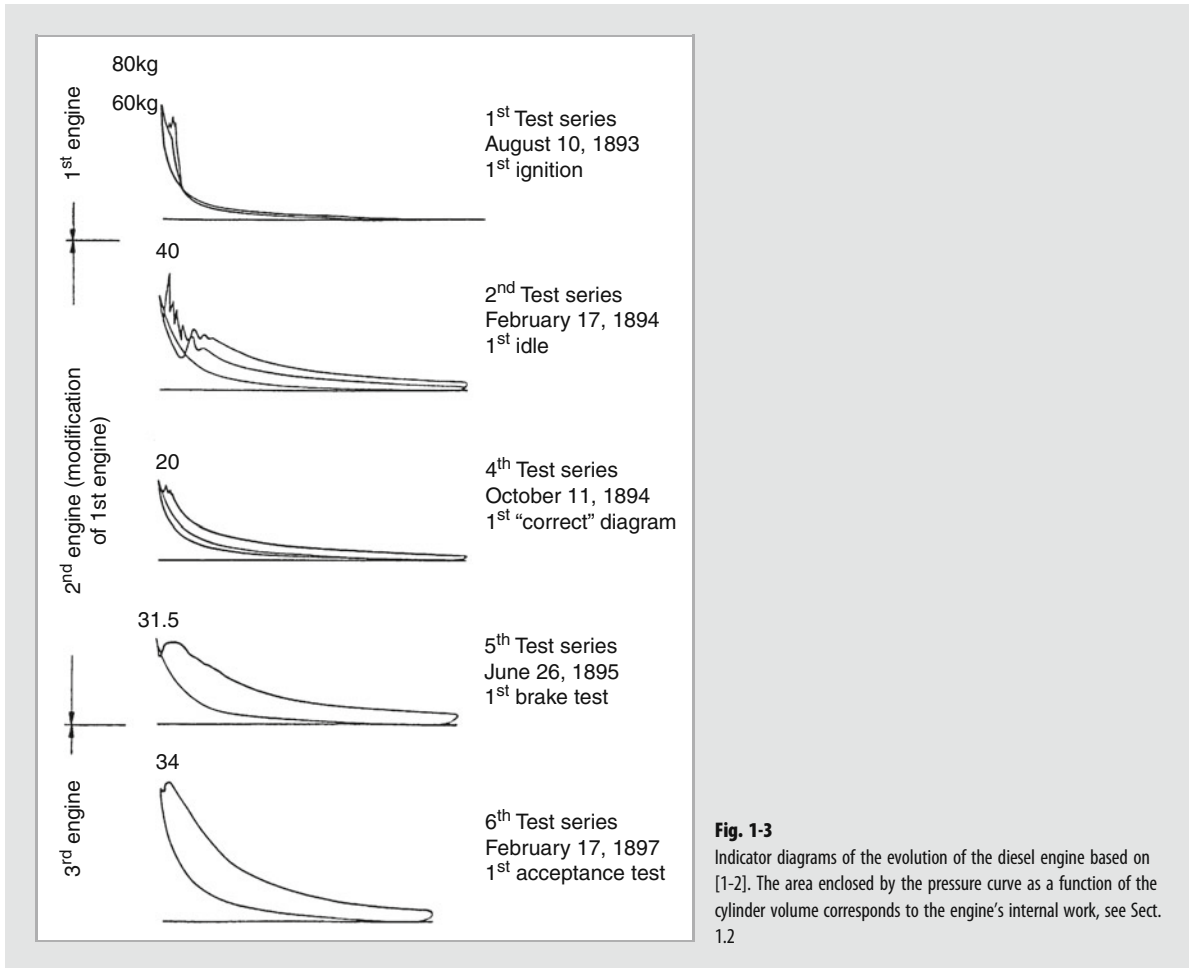

One of Diesel's later tests together with the small firm Safir intended to bring about general acceptance of the line of "vehicle diesel engine" development failed, among other things, because of the poor fuel metering. This problem was first solved by Bosch's diesel injection system [1-9].

Rudolf Diesel met his fate during a crossing from Antwerp to Harwich between September 29 and 30, 1913, just a few weeks after the appearance of his book: "The Origin of the Diesel Engine". After years of struggle and exertion had strained his mental and physical powers to their limit, financial collapse was threatening despite his vast multimillion earnings from his invention: Too proud to admit he had speculated badly and made mistakes or to accept help, Diesel, as his son and biographer relates, saw suicide as the only way out [1-10].

Left behind is his life's work, the high pressure engine that evolved from the theory of heat engines, which bears his name and, 100 years later, is still what its ingenious creator Rudolf

Diesel intended: The most rational heat engine of its and even our day (Fig. 1-6). Compared to 1897, its efficiency has approximately doubled and corresponds to the approximation of Carnot efficiency estimated by Diesel. Maximum cylinder pressure  $p_{Zmax}$  has more than quintupled and, at 230 bar in present day high performance engines (MTU 8000, see Sect. 17.4), nearly achieves the maximum value Diesel proposed for the Carnot cycle at more than ten times the power density  $P_A$ .

Measured by the *ecological imperative*, the diesel engine's high efficiency and multifuel compatibility conserves limited resources and reduces environmental pollution by the greenhouse gas carbon dioxide. However, only consistent development that continues to further reduce exhaust and noise emissions will ensure the diesel engine is accepted in the future too. At the same time, it might also be possible to fulfill Diesel's vision [1-10]:

"That my engine's exhaust gases are smokeless and odorless".

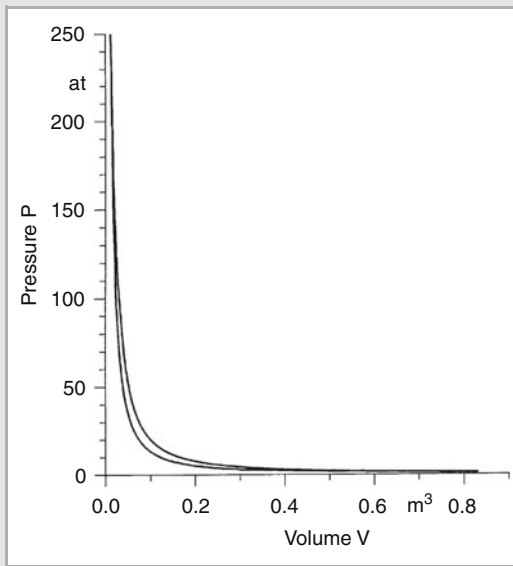


Fig. 1-4 Theoretical indicator diagrams of the Carnot cycle based on [1-3]

## 1.2 Fundamentals of Engine Engineering

### 1.2.1 Introduction

Just like gasoline engines, diesel engines are, in principle, energy converters that convert chemically bound fuel energy into mechanical energy (effective work) by supplying the heat released by combustion in an engine to a thermodynamic cycle.

As a function of the system boundaries of the converter represented as a “black box”, the energy balance (Fig. 1-7) is:

$$E_B + E_L + W_e + \Sigma E_V = 0.$$

If the energy of the combustion air relative to the ambient state is  $E_L = 0$ , then the energy supplied with the fuel  $m_B$  is equal to the effective work  $W_e$  and the total of all energy losses  $\Sigma E_V$ .

The technical system of a “diesel engine” is also part of a widely networked global system defined by the concepts of “resources” and “environmental pollution”. A view based purely on energy and economics aimed at minimizing the losses  $\Sigma E_V$  fails to satisfy present day demands specified by the ecological imperative according to which energy and material must always be converted with *maximum efficiency while minimally polluting the environment*. The outcome of the complex research and development work made necessary by these demands is the diesel engine of our day, which has evolved from a simple engine into a complex engine system consisting of a number of sub-systems (Fig. 1-8). The increased integration of electrical and electronic components and the transition from open control systems to closed control loops are characteristic of this development. Moreover, international competition is making minimum manufacturing costs and material consumption imperative. Among other things, this requires fit-for-purpose designs that optimally utilize components.

### 1.2.2 Basic Engineering Data

Every reciprocating engine’s geometry and kinematics are clearly specified by the geometric parameters of the:

- stroke/bore ratio  $\zeta = s/D$ ,
- connecting rod ratio  $\lambda_{pl} = r/l$  and
- compression ratio  $\varepsilon = V_{\max}/V_{\min} = (V_c + V_h)/V_c$ .

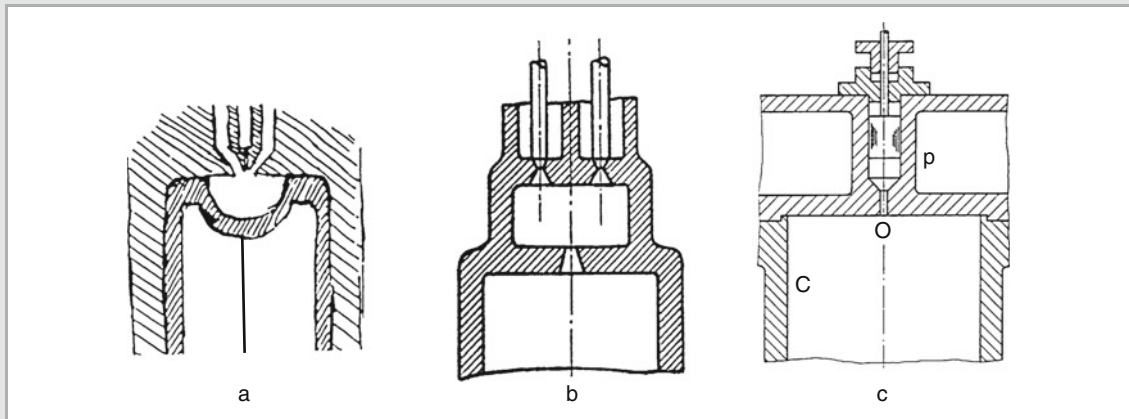


Fig. 1-5 Diesel’s proposals for a combustion system. (a) Piston with piston crown bowl (1892); (b) secondary combustion chamber (1893); (c) Pump-nozzle unit (1905), see Sect. 5.3



**Table 1-1** Milestones in the development of the diesel engine

Line of "high performance large diesel engine" development	
1897	First run of a diesel engine with an efficiency of $\eta_c = 26.2\%$ at Maschinenfabrik Augsburg
1898	Delivery of the first two-cylinder diesel engine with $2 \times 30$ HP at 180 rpm to the Vereinigte Zündholzfabriken AG in Kempten
1899	First two-stroke diesel engine from MAN by Hugo Güldner (unmarketable)
1899	First diesel engine without a crosshead, model <i>W</i> , from Gasmotorenfabrik Deutz
1901	First MAN trunk-piston diesel engine by Imanuel Lauster (model DM 70)
1903	First installation of a two cylinder four-stroke opposed piston diesel engine with 25 HP in a ship (the barge Petit Pierre) by Dyckhoff, Bar Le Duc
1904	First MAN diesel power station with $4 \times 400$ HP starts operation in Kiev
1905	Alfred Büchi proposes utilizing exhaust gas energy for supercharging
1906	Introduction of the first reversible two-stroke engine by the Sulzer and Winterthur brothers for a marine engine 100 HP/cyl. ( $s/D = 250/155$ )
1912	Commissioning of the first seagoing ship MS Selandia with two reversible four-stroke diesel engines from Burmeister & Wain each with 1,088 HP
1914	First test run of a double acting six-cylinder two-stroke engine with 2,000 HP/cyl. from MAN Nürnberg ( $s/D = 1050/850$ )
1951	First MAN four-stroke diesel engine (model 6KV30/45) with high-pressure supercharging: $\eta_e = 44.5\%$ at $w_{e\max} = 2.05$ kJ/l, $p_{z\max} = 142$ bar and $P_A = 3.1$ W/mm <sup>2</sup>
1972	Hitherto largest two-stroke diesel engine ( $s/D = 1,800/1,050$ , 40,000 HP) commences operation
1982	Market launch of super long stroke, two-stroke engines with $s/D \approx 3$ (Sulzer, B & W)
1984	MAN B & W achieves consumption of 167.3 g/kWh ( $\eta_e = 50.4\%$ )
1987	Commissioning of the largest diesel-electric propulsion system with MAN-B & W four-stroke diesel engines and a total output of 95,600 kW to drive the Queen Elizabeth 2
1991/92	Two-stroke and four-stroke experimental engines from Sulzer (RTX54 with $p_{z\max} = 180$ bar, $P_A = 8.5$ W/mm <sup>2</sup> ) and MAN B & W (4T50MX with $p_{z\max} = 180$ bar, $P_A = 9.45$ W/mm <sup>2</sup> )
1997	Sulzer 12RTA96C ( $s/D = 2,500/960$ ): two-stroke diesel engine, $P_e = 65,880$ kW at $n = 100$ rpm commences operation
1998	Sulzer RTX-3 research engine to test common rail technology on large two-stroke diesel engines
2000/01	MAN B & W 12K98MC-C ( $s/D = 2,400/980$ ): The currently most powerful two-stroke diesel engine with $P_e = 68,520$ kW at $n = 104$ rpm
2004	First four-stroke medium speed diesel engine MAN B & W 32/40, $P_e = 3,080$ kW, common rail (CR) injection in real use on a container ship
2006	With a consumption of $b_e = 177$ g/kWh, the MaK M43C is the leading four-stroke medium speed marine engine with a cylinder output of 1,000 kW ( $s/D = 610/430$ , $w_e = 2.71$ kJ/dm <sup>3</sup> , $c_m = 10.2$ m/s)
2006	Wärtsilä commissions the world's first 14 cylinder two-stroke engine and thus the most powerful diesel engine: Wärtsilä RTA-flex96C, CR injection, $P_e = 80,080$ kW, $s/D = 2,500/900$ , $c_m = 8.5$ m/s, $w_e = 1.86$ kJ/dm <sup>3</sup> ( $p_e = 18.6$ bar)
Line of "high-speed vehicle diesel engine" development	
1898	First run of a two cylinder four-stroke opposed piston engine ("5 HP horseless carriage engine") by Lucian Vogel at MAN Nürnberg (test engine, unmarketable)
1905	Test engine by Rudolf Diesel based on a four cylinder Saurer gasoline engine with air compressor and direct injection (unmarketable)
1906	Patent DRP 196514 by Deutz for indirect injection
1909	Basic patent DRP 230517 by L'Orange for a prechamber
1910	British patent 1059 by McKenchie on direct high pressure injection
1912	First compressorless Deutz diesel engine, model MKV, goes into mass production
1913	First diesel locomotive with four cylinder two-stroke V-engine presented by the Sulzer brothers (power 1,000 HP)
1914	First diesel-electric motor coach with Sulzer engines for the Prussian and Saxon State Railways
1924	First commercial vehicle diesel engines presented by MAN Nürnberg (direct injection) and Daimler Benz AG (indirect injection in prechamber)
1927	Start of mass production of diesel injection systems at Bosch
1931	Prototype test of the six-cylinder two-stroke opposed piston aircraft diesel engine JUMO 204 of Junkers-Motorenbau GmbH: power 530 kW (750 HP), power mass 1.0 kg/HP
1934	V8 four-stroke diesel engines with prechambers from Daimler-Benz AG for LZ 129 Hindenburg with 1,200 HP at 1,650 rpm (power mass: 1.6 kg/HP including transmission)
1936	First production car diesel engines with prechambers from Daimler-Benz AG (car model 260 D) and Hanomag
1953	First car diesel engine with swirl chamber from Borgward and Fiat
1978	First production car diesel engine with exhaust gas turbocharging (Daimler-Benz AG)
1983	First production high-speed high-performance diesel engine from MTU with twin-stage turbocharging: $w_{e\max} = 2.94$ kJ/l bei $p_{z\max} = 180$ bar, power per unit piston area $P_A = 8.3$ W/mm <sup>2</sup>
1986/87	First ever electronic engine management (ECD) for vehicle diesel engines implemented (BMW: car, Daimler-Benz: commercial vehicle)
1988	First production car diesel engine with direct injection (Fiat)
1989	First production car diesel engine with exhaust gas turbocharging and direct injection at Audi (car Audi 100 DI)
1996	First car diesel engine with direct injection and a four-valve combustion chamber (Opel Ecotec diesel engine)
1997	First supercharged car diesel engine with direct common rail high pressure injection and variable turbine geometry (Fiat, Mercedes-Benz)

**Table 1-1** (Continued)

1998	First V8 car diesel engine: BMW 3.9 l DI turbodiesel, $P_e = 180$ kW at 4,000 rpm, $M_{max} = 560$ Nm (1,750...2,500 rpm)
1999	Smart cdi, $0.8$ dm <sup>3</sup> displacement, currently the smallest turbodiesel engine with intercooler and common rail high pressure injection: $P_e = 30$ kW at 4,200 rpm with 3.4 l/100 km first "3 liter car" from DaimlerChrysler
2000	First production car diesel engines with particulate filters (Peugeot)
2004	OPEL introduces a Vectra OPC study suitable for everyday with a 1.9 liter CDTI twin turbo unit with a specific power output of $P_V = 82$ kW/dm <sup>3</sup>
2006	At the 74th 24 h Le Mans race, an AUDI R10 TDI with a V12 diesel engine ( $P_e > 476$ kW at $n = 5,000$ rpm, $V_H = 5.5$ dm <sup>3</sup> , $w_e = 2.1$ kJ/dm <sup>3</sup> with a biturbo boost pressure of $p_L = 2.94$ bar) wins the race

$V_{min}$  corresponds to the compression volume  $V_c$  and the maximum cylinder volume  $V_{max}$  corresponds to the total from  $V_c$  and the cylinder displacement  $V_h$ , to which the following with the cylinder bore  $D$  and piston stroke  $s$  applies:

$$V_h = s \cdot \pi \cdot D^2 / 4.$$

Accordingly,  $V_H = z \cdot V_h$  is the displacement of an engine with  $z$  cylinders.

The trunk-piston engine (Fig. 1-9) has established itself. Only large two-stroke engines (see Sect. 18.4) have a cross-head drive to relieve the piston from cornering forces (see Sect. 8.1). Both types are still only used with a unilaterally loaded piston. A standardized time value, the crank angle  $\varphi$  and the rotational speed  $\omega$  have the following relationship:

$$\omega = d\varphi/dt = 2 \cdot \pi \cdot n.$$

When the speed  $n$  is not denoted as engine speed ( $s^{-1}$ ) but rather, as is customary in engine manufacturing, in revolutions per minute (rpm), then  $\omega$  is  $\pi \cdot n/30$ .

An internal combustion engine's combustion cycle proceeds in the hermetic cylinder volume  $V_z$ , which changes periodically with the piston motion  $z_K$  within the boundaries  $V_{max}$  and  $V_{min}$ :

$$V_z(\varphi) = V_c + z_K(\varphi) \cdot \pi \cdot D^2 / 4.$$

With the crank radius  $r$  as a function of the instantaneous crank position  $\varphi$  in crank angle degree ( $^\circ$ CA) and top dead center TDC ( $\varphi = 0$ ) as the starting point, the following applies to the piston stroke:

$$z_K = r \cdot f(\varphi),$$


The following approximation function is usually applied:

$$f(\varphi) = 1 - \cos \varphi + (\lambda_{pl}/4) \cdot \sin^2 \varphi.$$


The following ensues for instantaneous piston velocity  $c_K$  and acceleration  $a_K$ :

$$c_K = dz_K/dt = r \cdot \omega \cdot [\sin \varphi + (\lambda_{pl}/2) \cdot \sin 2\varphi]$$

$$a_K = d^2z_K/dt^2 = -r \cdot \omega \cdot [\cos \varphi + \lambda_{pl} \cdot \cos 2\varphi].$$

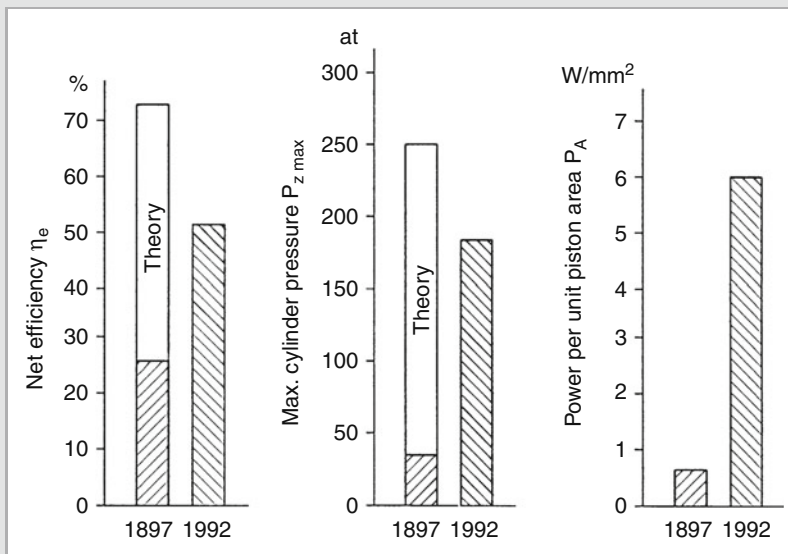**Fig. 1-6**

Optimum net efficiency  $\eta_e$ , maximum cylinder pressure  $p_{zmax}$  and power per unit piston area  $P_A$  for production engines approximately 100 years after the introduction of the first diesel engine (see also Fig. 1-13 and Table 1-3)

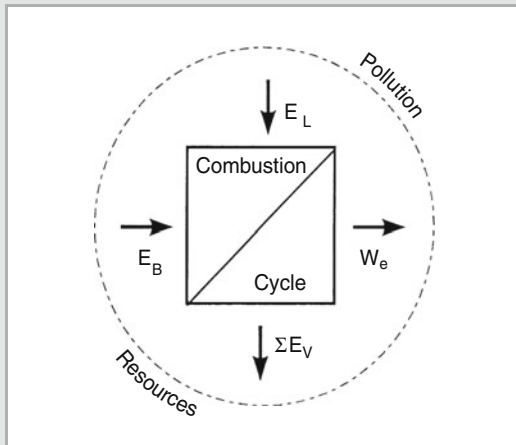


**Fig. 1-7** The diesel engine as an energy converter

Following from the piston stroke  $s$  in m and engine speed  $n$  in  $s^{-1}$ , the *mean piston velocity*

$$c_m = 2 \cdot s \cdot n \quad [\text{m/s}] \quad (1-1)$$

is an important *parameter for kinematic and dynamic engine performance*. As it increases, inertial forces ( $\sim c_m^2$ ), friction and wear also increase. Thus,  $c_m$  may only be increased to a limited extent. Consequently, a large engine runs at low speeds or a high-speed engine has small dimensions. The following correlation to engine size is approximated for diesel engines with a bore diameter of  $0.1 \text{ m} < D < 1 \text{ m}$ :

$$c_m \approx 8 \cdot D^{-1/4}. \quad (1-2)$$

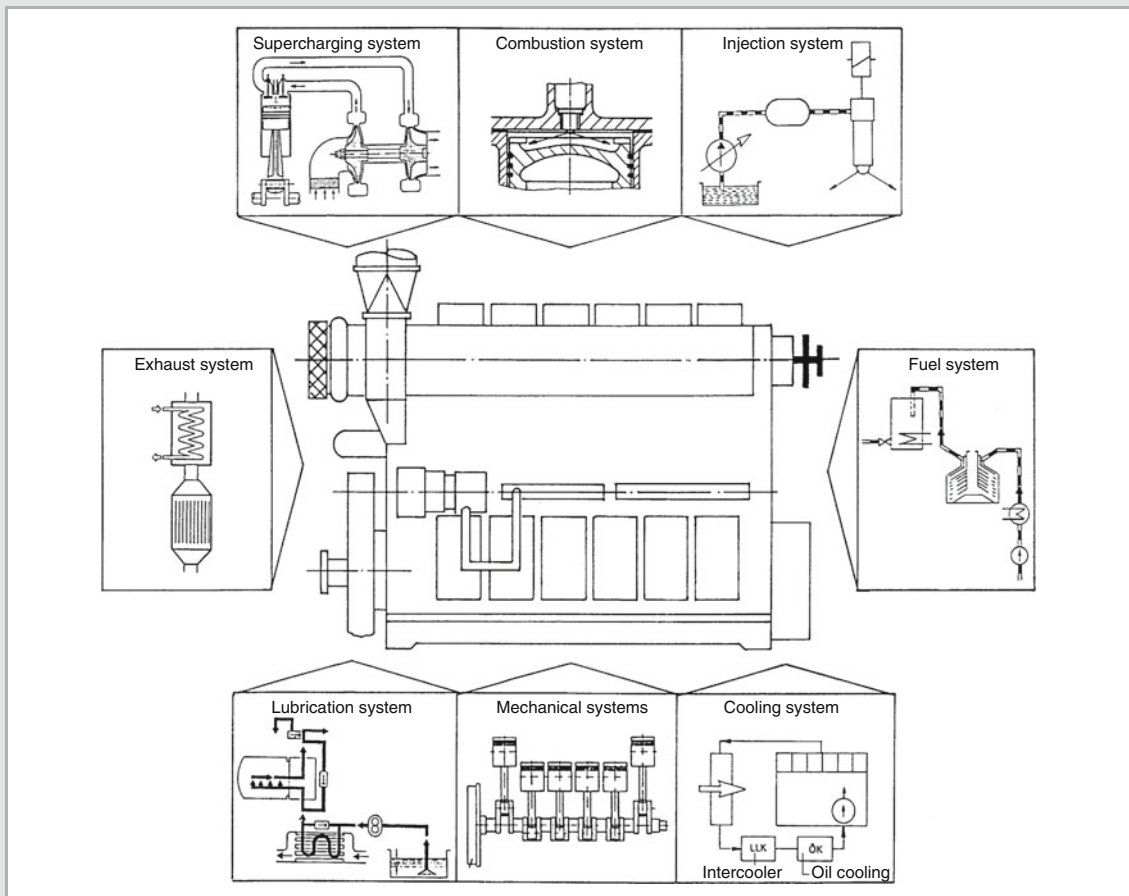

**Fig. 1-8** The modern diesel engine as a complex of subsystems

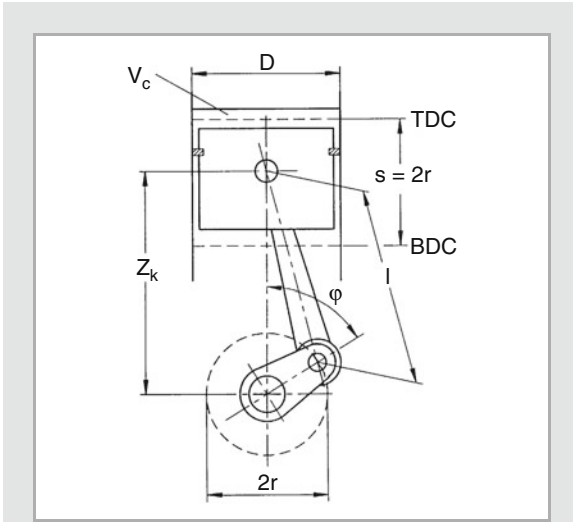


Fig. 1-9 Basic engineering data of a trunk-piston engine

## 1.2.3 Engine Combustion

### 1.2.3.1 Fundamentals of Combustion Simulation

Chemically, combustion is the oxidation of fuel molecules with atmospheric oxygen as the oxidant. Thus, the maximum convertible fuel mass  $m_B$  is limited by the air mass present in the engine cylinder. Using the fuel-specific stoichiometric air requirement  $L_{\min}$  (kg air/kg fuel) for complete combustion, the air/fuel ratio  $\lambda_v$  specifies the ratio of “supply to demand” in combustion:

$$\lambda_v = m_{LZ} / (m_B \cdot L_{\min}). \quad (1-3)$$

The following applies to the “supply” of the air mass  $m_{LZ}$  of all cylinders ( $V_Z = z \cdot V_c$ ) contained in the entire engine:


$$m_{LZ} = V_Z \cdot \rho_Z = \lambda_1 \cdot \rho_L \cdot V_H. \quad (1-4)$$

Since the density  $\rho_Z$  of the cylinder charge is usually unknown, the definitions of the volumetric efficiency  $\lambda_1$  (see Sect. 2.1) and the density  $\rho_L$  of the fresh charge directly at the inlet to the cylinder head are generally reverted to:

$$\rho_L = p_L / (R_L \cdot T_L). \quad (1-5)$$

The air requirement ensues from the elemental analysis of the fuel: A petroleum derivative, diesel fuel (DF) is a conglomerate of hydrocarbons and primarily consists of carbon C, hydrogen H and sulfur S with usually insignificant fractions of oxygen O and nitrogen N. Thus, the balance equation for the complete oxidation of a generic fuel molecule

$C_xH_yS_z$  into carbon dioxide  $CO_2$ , water  $H_2O$  and sulfur dioxide  $SO_2$



yields the stoichiometric air/fuel ratio  $L_{\min}$  corresponding to the oxygen content of the air and the particular number of moles:

$$L_{\min} = 11.48 \cdot (c + 2.98 \cdot h) + 4.3 \cdot s - 4.31 \cdot o \quad [\text{kg/kg}]$$

( $c, h, s, o$ : mass fraction of 1 kg fuel according to the elemental analysis. Reference value for DK:  $L_{\min} = 14.5$  kg/kg).

The heat  $Q_{ex}$  released during combustion corresponds to the fuel-specific *calorific value*  $H_u$ , which may also be calculated [1-11] from the elemental analysis as:

$$H_u = 35.2 \cdot c + 94.2 \cdot h + 10.5 \cdot (s - o) \quad [\text{MJ/kg}]$$

The following approximate relation is based on the fuel density  $\rho_B$  at 15°C:

$$H_u = 46.22 - 9.13 \cdot \rho_B^2 + 3.68 \rho_B \quad [\text{MJ/kg}].$$

Thus, the following applies to the heat supplied to the combustion cycle by “internal combustion”:

$$E_B = Q_{zu} \leq m_B \cdot H_u.$$

### 1.2.3.2 Comparison of Engine Combustion Systems

Combustion is preceded by the preparation of usually liquid fuel to obtain a combustible mixture of fuel vapor and air. This process proceeds differently in diesel and gasoline engines (Table 1-2).

*Internal mixture formation* in diesel engines (see Chap. 3) begins with the injection of the fuel into the highly compressed and thus heated air shortly before TDC, whereas *external mixture* in classic gasoline engines is formed outside the working chamber by a carburetor or by injection into the intake manifold and often extends through the induction and compression stroke.

While gasoline engines have a *homogeneous fuel/air mixture*, diesel engines have a *heterogeneous mixture* before ignition, which consists of fuel droplets with diameters of a few micrometers distributed throughout the combustion chamber. They are partly liquid and partly surrounded by a fuel vapor/air mixture.

Provided the *air/fuel ratio* of the homogeneous mixture lies within the ignition limits, combustion in gasoline engines is triggered by controlled spark ignition by activating an electrical discharge in a spark plug. In diesel engines, already prepared droplets, i.e. droplets surrounded by a combustible mixture, *auto-ignite*. Ignition limits in the stoichiometric mixture range ( $\lambda_v = 1$ ) only exist for the micromixture in the region of the fuel droplets (see Chap. 3).

**Table 1-2** Comparison of features of engine combustion

Feature	Diesel engine	Gasoline engine
Mixture formation	Inside $V_z$	Outside $V_z$
Type of mixture	Heterogeneous	Homogenous
Ignition	Auto-ignition with excess air	Spark ignition within ignition limits
Air/fuel ratio	$\lambda_v \geq \lambda_{\min} > 1$	$0.6 < \lambda_v < 1.3$
Combustion	Diffusion flame	Premix flame
Torque change through fuel	Variable $I_v$ (quality control) Highly ignitable	Variable mixture quantity (quantity control) Ignition resistant

Diesel engines require excess air ( $\lambda_v \geq \lambda_{\min} > 1$ ) for normal combustion. Consequently, the *supply of energy is adapted to the engine load* in diesel engines by the air/fuel ratio, i.e. the *mixture quality* (quality control) and, in light of the ignition limits, by the *mixture quantity* (quantity control) in gasoline engines by throttling that entails heavy losses when a fresh charge is aspirated.

The type of ignition and mixture formation determines the *fuel requirements*: Diesel fuel must be *highly ignitable*. This is expressed by its *cetane number*. Gasoline must be *ignition resistant*, i.e. have a high *octane number*, so that uncontrolled auto-ignition does not trigger uncontrolled combustion (detonation). The latter is ensured by low boiling, short chain and thus thermally stable hydrocarbons ( $C_5$  through  $C_{10}$ ). Diesel fuel, on the other hand, consists of high boiling, long chain hydrocarbons ( $C_9$  through  $C_{30}$ ) that disintegrate earlier and form free radicals that facilitate auto-ignition (see Chap. 3).

## 1.2.4 Fundamentals of Thermodynamics

### 1.2.4.1 Ideal Changes of States of Gases

The state of a gas mass  $m$  is determinable by two thermal state variables by using the general equation of state for ideal gases:

$$p \cdot V = m \cdot R \cdot T$$

( $p$  absolute pressure in Pa,  $T$  temperature in K,  $V$  volume in  $m^3$ ,  $R$  specific gas constant, e.g. for air  $R_L = 287.04 \text{ J/kg} \cdot \text{K}$ ). Ideal gases are characterized by a constant isentropic exponent  $\kappa$  (air:  $\kappa = 1.4$ ; exhaust gas:  $\kappa \approx 1.36$ ) as a function of pressure, temperature and gas composition.

Consequently, the state of a gas can be represented in a  $p$ ,  $V$  diagram with the variables  $p$  and  $V$  and tracked. Changes of state are easy to calculate by setting constants of a state variable for which simple closed equations exist for isobars ( $p = \text{const.}$ ), isotherms ( $T = \text{const.}$ ) and isochors ( $V = \text{const.}$ ) [1-12]. The adiabatic change of state is a special case:

$$p \cdot V^\kappa = \text{const.},$$

heat not being transferred between the gas and the environment. When this cycle is reversible, it is called an isentropic change of state. However, just as the real isentropic exponent depends on the state and composition of a gas, this is never actually the case in reality [1-13].

### 1.2.4.2 Ideal Cycle and Standard Cycle

In an ideal cycle, the gas undergoes a self-contained change of state, returning to its initial state once it has completed the cycle. Thus, the following applies to the internal energy  $U = U(T)$ :

$$\oint dU = 0.$$

Hence, from the first law of thermodynamics that describes the conservation of energy in closed systems:

$$\partial Q = dU + p \cdot dV,$$

it follows that the heat  $Q$  converted during the cycle accumulates as mechanical work:

$$\oint \partial Q = \oint p \cdot dV = W_{th},$$


i.e. the change in pressure and volume corresponds to the theoretically useful work  $W_{th}$  of the ideal cycle.

An ideal cycle becomes the standard cycle for a thermal machine once it has been adjusted for reality. For a reciprocating piston engine, this means that the ideal cycle and real combustion cycle proceed similarly between two volume and pressure limits specified by  $V_{\max}$  and  $V_{\min}$  and  $p_{\max}$  and  $p_{\min}$ . The upper pressure limit  $p_{\max}$  corresponds to the maximum cylinder pressure  $p_{Z\max}$  allowable for reasons of stability and  $p_{\min}$  the air pressure  $p_L$  before intake into the engine (Fig. 1-10a). Other specifications that must agree are the compression ratio  $\varepsilon$  and input heat  $Q_{zu}$  or  $Q_B$ :

$$Q_{zu} = Q_B = m_B \cdot H_u.$$

When the mass of the fresh charge  $m_{LZ}$  is given (Eq. (1-4)), the fuel mass  $m_B$  is limited by the air/fuel ratio  $\lambda_v$  and the *calorific value of the mixture*  $h_u$ :

$$h_u = Q_{zu} / (m_B + m_{LZ}) = H_u / (1 + \lambda_v \cdot L_{\min}).$$

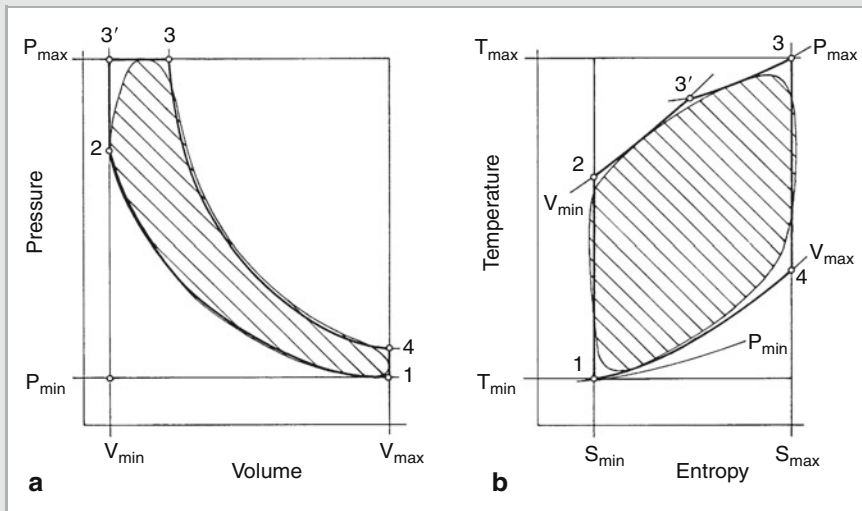

**Fig. 1-10**  
The Seiliger cycle as standard cycle for internal combustion engines in a  $p, V$  diagram (a) and  $T, s$  diagram (b)

Based on the diesel engine's combustion phase and assuming the gas exchange phase is free of losses along the isobars  $p_{\min}$  (see Sect. 2.1), the standard cycle in 1 begins with adiabatic compression to  $p_2 = p_c = p_1 \cdot \varepsilon^\kappa$  (Fig. 1-10a). Afterward, heat is transferred: first, isochorically until it reaches the limit pressure  $p_{\max}$  in 3' and, then, isobarically up to 3. The adiabatic expansion that follows ends in 4. The cycle concludes when heat begins to dissipate along the isochors  $V_{\max}$  afterward. The area of the region 1-2-3'-3-4-1 corresponds to the theoretical work:

$$W_{\text{th}} = h_{\text{th}} \cdot Q_{\text{zu}},$$

Applying the charging ratio  $\delta = V_3/V_2$  and the pressure ratio  $\psi = p_3/p_2$  makes it possible to specify a closed expression (provided that  $\kappa = \text{const.}$ ) for the thermal efficiency  $\eta_{\text{th}}$  of the Seiliger cycle described here

$$\eta_{\text{th}} = (1 - \varepsilon^{1-\kappa}) \cdot (\delta^\kappa \cdot \psi - 1) / [\psi + \kappa \cdot (\delta - 1)],$$

The Seiliger cycle's conversion of energy can be followed in the temperature entropy ( $T, s$ -) diagram (Fig. 1-10b): Since the areas of the regions  $s_{\min}$ -1-2-3'-3-4- $s_{\max}$  and  $s_{\min}$ -1-4- $s_{\max}$  correspond to the heat supplied  $Q_{\text{zu}}$  and extracted  $Q_{\text{ab}}$  respectively, the difference corresponds to the theoretical effective work. Thus, the following applies to thermal efficiency:

$$\eta_{\text{th}} = (Q_{\text{zu}} - Q_{\text{ab}}) / Q_{\text{zu}} = W_{\text{th}} / Q_{\text{zu}}. \quad (1-6)$$

The rectangles formed by the limit values in both diagrams correspond to the maximum useful work in each case, yet with different efficiencies: The full load diagram of an ideal


reciprocating piston steam engine with moderate efficiency in the  $p, V$  diagram is presented alongside the Carnot efficiency with real non-useable work (see Sect. 1.1). The temperature difference  $T_{\max} - T_{\min}$  is crucial to the Carnot cycle's efficiency  $\eta_c$ :

$$\eta_c = (T_{\max} - T_{\min}) / T_{\max}.$$

The  $T, s$  diagram reveals that high temperatures (up to 2,500 K) occur even during real combustion (see Sect. 1.3). Since combustion is intermittent, the engine components fall below the temperatures critical for them when they have been designed appropriately (see Sect. 9.1). The lowest possible temperature  $T_{\min} \leq T_L$  is also conducive to this.

Since it can be adapted to the real engine process, the Seiliger cycle corresponds to the most general case of a standard cycle. It also encompasses the limit cases of the constant volume cycle ( $\delta \rightarrow 1$ ) and the constant pressure cycle ( $\psi \rightarrow 1$ ), which are often referred to as the ideal gasoline engine or diesel engine process even though combustion in gasoline engines does not occur with an infinitely high combustion rate and combustion in diesel engines is not isobar (Fig. 1-11).

Allowing for the real gas behavior, i.e.  $\kappa \neq \text{const.}$ , the compression ratio's influence on the thermal efficiency  $\eta_{\text{th}}^*$  for a pressure ratio  $p_{\max}/p_{\min} = 60$  is evident in Fig. 1-12: The allowable maximum pressure in the constant volume cycle is already exceeded for  $\varepsilon \approx 9$  at an air/fuel ratio of  $\lambda_V = 2$ . A Seiliger cycle allows higher compression ratios but transforms into a constant pressure cycle for  $\varepsilon \approx 19.7$ .

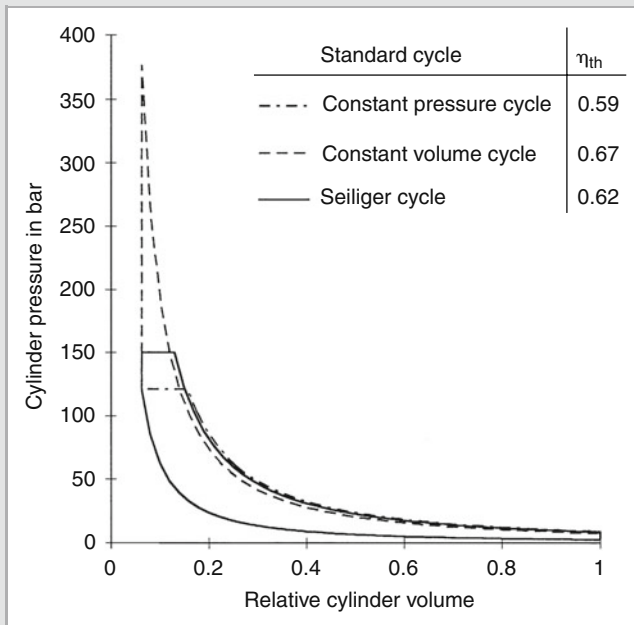

**Fig. 1-11**

Ideal cycle as standard cycle: Seiliger cycle ( $p_{Zmax} = 150$  bar), constant pressure and constant volume cycle for  $p_1 = 2.5$  bar,  $T_1 = 40^\circ\text{C}$ ,  $\varepsilon = 16$ ,  $\lambda_v = 2$  and  $H_u = 43$  MJ/kg

Engine process simulation (Sect. 1.3) has eliminated the idealized standard cycle in the field, yet has retained its worth for quick “upward” estimates, e.g. when engine process control is varied.

## 1.2.5 The Diesel Engine Process

### 1.2.5.1 Two-stroke and Four-stroke Cycle

Unlike the idealized cycle with external heat input, internal combustion requires the exchange of the charge after every combustion phase by a gas exchange phase (see Sect. 2.1). To do so, a four-stroke engine requires two additional strokes or cycles as the motion from one dead center to the other is termed. Hence, by expelling the exhaust gas and aspirating the fresh charge after the expansion stroke (compression as well as combustion and expansion), the entire working cycle is comprised of two revolutions or  $720^\circ\text{CA}$ . Consequently, a frequency ratio exists between the speed and the working cycle frequency  $n_a$ :

$$a = n/n_a, \tag{1-7}$$


which is often denoted as the “cycle rate” without specifying the actual number of cycles with  $a = 2$  (four-stroke cycle) or  $a = 1$  (two-stroke cycle).

### 1.2.5.2 Real Engine Efficiencies

Along with the thermal efficiency, which enables an upward estimate, the net efficiency is of prime interest:

$$\eta_e = W_e/(m_B \cdot H_u) = \eta_{th} \cdot \eta_u \cdot \eta_g \cdot \eta_m = \eta_i \cdot \eta_m, \tag{1-8}$$

It can also be specified as the product of the thermal efficiency and the reference variable that describes the percentage loss.

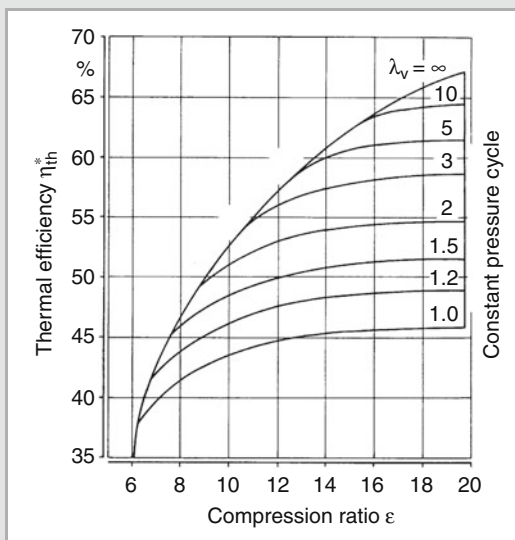

**Fig. 1-12** Thermal efficiency  $\eta_{th}^*$  incorporating real gas behavior (based on [1-13])

Losses by incomplete combustion are included by the conversion factor:

$$\eta_u = Q_{zu}/(m_B \cdot H_u).$$

The efficiency factor:

$$\eta_g = W_i/W_{th}$$

describes the real cycle's deviations from the ideal cycle by employing

- a real instead of an ideal working gas,
- wall heat losses instead of the adiabatic change of state,
- real combustion instead of idealized heat input and
- gas exchange (throttling, heating and scavenging losses).

In accordance with DIN 1940, mechanical efficiency

$$\eta_m = W_e/W_i$$

encompasses the frictional losses at the piston and in the bearings, the heat loss of all the assemblies necessary for engine operation and the aerodynamic and hydraulic losses in the crankshaft assembly.

Referred to as indication, measurement of the cylinder head pressure curve can be used to determine the indicated work  $W_i$  (the hatched area in Fig. 1-10a) present in a piston and thus the internal (indicated) efficiency

$$\eta_i = W_i/(m_B \cdot H_u) = \oint p_z \cdot dV/(m_B \cdot H_u).$$

### 1.2.5.3 Engine Operation and Engine Parameters

#### Effective Brake Work and Torque

The effective brake work  $W_e$  ensues from the torque  $M$  and the "cycle rate"  $a$  measurable at the engine's output shaft:

$$W_e = 2 \cdot \pi \cdot a \cdot M = w_e \cdot V_H. \quad (1-9)$$

When  $W_e$  is related to displacement  $V_H$ , then the *specific work*  $w_e$  in  $\text{kJ/dm}^3$  denotes the effective work obtained from one liter of displacement. Thus, along with the *mean piston velocity*  $c_m$  Eq. (1-1), it is the most important engine parameter that characterizes the "state-of-the-art". Engine companies with a sense of tradition often still apply the parameter  $p_e$ , "brake mean effective pressure", which, despite being specified in "bar", does not correspond to any *measurable pressure*. Rather, it is rooted in the history of mechanical engineering.<sup>1</sup> The following applies to conversions:

$$1 \text{ bar "brake mean effective pressure"} = 0.1 \text{ kJ/dm}^3.$$

Based on Eq. (1-9) with  $M/V_H = w_e/(2 \cdot \pi \cdot \alpha)$ , the term volume-specific torque  $M/V_H$  in  $\text{Nm/dm}^3$  sometimes employed for vehicle engines likewise equals the specific effective work,  $w_e \approx 0.0125 \cdot (M/V_H)$  applying to four-stroke engines.

#### Fundamental Diesel Engine Equation

With the net efficiency  $\eta_e$  and the air/fuel ratio  $\lambda_V$ , Eq. (1-8), (1-3), the following ensues for the effective work:

$$W_e = \eta_e \cdot m_B \cdot H_u = \eta_e \cdot m_{LZ} \cdot H_u/(\lambda_V \cdot L_{min}). \quad (1-10)$$

The fresh air mass  $m_{LZ}$  in an engine, Eq. (1-4), is defined by the volumetric efficiency  $\lambda_1$  and charge density  $\rho_L$ , Eq. (1-5), so that the following ensues for the specific effective work:

$$w_e = \eta_e \cdot \lambda_1 \cdot (p_L/(R_L \cdot T_L)) \cdot (H_u/(\lambda_V \cdot L_{min})). \quad (1-11)$$

If the specific fuel parameters are regarded as given just like the indirectly influenceable efficiency, then only increasing the pressure  $p_L$  by compression, e.g. by exhaust gas turbocharging with intercooling (see Sect. 2.2), remains a freely selectable option to increase effective work since limits exist for both the volumetric efficiency with  $(\lambda_1)_{max} \rightarrow \varepsilon/(\varepsilon-1)$  and the air/fuel ratio  $\lambda_V \rightarrow \lambda_{min} > 1$ .

#### Engine Power

The combustion cycle frequency  $n_a$  and specific effective work  $w_e$ , Eq. (1-7), (1-9), yield the following for the net power:

$$P_e = W_e \cdot n_a = w_e \cdot z \cdot V_h \cdot n/a, \quad (1-12)$$

and the following with the mean piston velocity  $c_m$ , Eq. (1-1):

$$P_e = C_0 \cdot w_e \cdot C_m \cdot z \cdot D^2 \quad (1-13)$$

( $C_0 = \pi/(8 \cdot a) \approx 0.2$  or  $0.4$  for four and two-stroke respectively).

With its quadratic dependence on bore diameter  $D$ , the second form of the power equation suggests a large engine is another option to boost power. At the same time, engine torque (Eq. (1-9)) increases:

$$M \sim W_e \sim w_e \cdot z \cdot D^3.$$

Accordingly, when the cylinder dimensions are retained, comparable engine power through specific work  $w_e$  can only be achieved by maximum supercharging (see Sect. 17.4).

When speed is specified in rpm, displacement in  $\text{dm}^3$  and specific work in  $\text{kJ/dm}^3$ , the following is obtained for practical calculations

$$P_e = w_e \cdot z \cdot V_h \cdot n/(60 \cdot a)$$

or, using the brake mean effective pressure  $p_e$  in bar, the following

$$P_e = p_e \cdot z \cdot V_h \cdot n/(600 \cdot a)$$

in kW in each case.

<sup>1</sup> The inability to reach a consensus among the many authors from industry and academia must be borne in mind in the individual sections, especially when numerical data is provided.



The *fundamental diesel engine equation*, Eq. (1-11), reveals that engine power is a function of the ambient condition: A diesel engine run at an altitude of 1,000 m cannot produce the same power as at sea level. Hence, set reference conditions ( $x$ ) for performance comparisons and acceptance tests for users' specific concerns have been defined to convert the power  $P$  measured into the power  $P_x$  applicable to the reference condition.<sup>2</sup> Generally, the following applies:

$$P_x \cong \alpha^\beta \cdot P.$$

In addition to air pressure and temperature, influencing variables for  $\alpha$  and  $\beta$  are relative humidity, coolant inlet temperature in the intercooler and engine mechanical efficiency ( $\eta_m = 0.8$  if unknown). Since a danger of overcompensation has been proven to often exist, some vehicle engine manufacturers have switched to measuring power in air conditioned test benches with ambient conditions that conform to standards. Since diesel engines have low overload capacity, the *blocked ISO net power* that may not be exceeded or the *ISO standard power* that may be exceeded depending on the engines' use is specified with the defined magnitude and duration of their extra power [1-14]. At 10% overload, it corresponds to the CIMAC recommendation for "continuous brake power" for marine engines.

### Power-Related Engine Parameters

Frequently applied to vehicle engines, the displacement specific power output

$$P_V = P_e/V_H = w_e \cdot n/a. \quad (1-14)$$

is a function of the speed and thus also engine size. On the other hand, the specific power per unit piston area:

$$P_A = P_e/(z \cdot A_k) = w_e \cdot c_m/(2 \cdot a), \quad (1-15)$$

(with  $w_e$  in  $\text{kJ}/\text{dm}^3$ ,  $c_m$  in  $\text{m}/\text{s}$ ,  $2 \cdot a = 4$  results for a four-stroke engine and  $2 \cdot a = 2$  for a two-stroke engine, where  $P_A$  is in  $\text{W}/\text{mm}^2$ ) is independent of engine size if the correlation from Eq. (1-2) is disregarded this once. The product of *mechanical and thermal* ( $w_e$ ) as well as *dynamic load* ( $c_m$ ) characterizes the "state-of-the-art" for two-stroke or four-stroke engines and large or vehicle engines in equal measure as the following example makes clear:

In a comparison of two production engines, the low speed two-stroke Wärtsilä RT96C diesel engine [1-15] with an MCR cylinder output of 5,720 kW, specific effective work of  $w_e = 1.86 \text{ kJ}/\text{dm}^3$  and a mean piston velocity of  $c_m = 8.5 \text{ m}/\text{s}$  and the currently most powerful BMW diesel engine for cars

(BMW 306 D4:  $w_e = 1.91 \text{ kJ}/\text{dm}^3$ ,  $c_m = 13.2 \text{ m}/\text{s}$  [1-16]), the following ensues for the power per unit piston area and displacement specific power output:

- Wärtsilä  $P_A = 7.91 \text{ W}/\text{mm}^2$  and  $P_V = 3.16 \text{ kW}/\text{dm}^3$ ,
- BMW  $P_A = 6.31 \text{ W}/\text{mm}^2$  and  $P_V = 70.2 \text{ kW}/\text{dm}^3$ .

The comparison of the powers per unit piston area clearly demonstrates that even the low speed two-stroke engine, sometimes derogatorily called a "dinosaur", is a "high-tech" product that even leaves the BMW 306 D4, a "powerhouse" with 210 kW rated power, far behind.<sup>3</sup>

A car diesel engine has to deliver its full load power on the road only very rarely, whereas a marine diesel engine – barring a few maneuvers – always runs under full load, not infrequently up to 8,000 h a year.

The development of the variable  $P_A$  presented in Fig. 1-13 reveals that the potential for diesel engine development has apparently not been exhausted yet! However, current emphases of development are geared less toward enhancing performance than reducing fuel consumption and improving exhaust emission in light of rising fuel prices.

### Specific Fuel Consumption

The fuel mass flow  $\dot{m}_B$  yields the performance-related specific fuel delivery rate or fuel consumption:

$$b_e = \dot{m}_B/P_e = 1/(\eta_e \cdot H_u).$$

Accordingly, comparative analyses require identical calorific values or fuels. When alternative fuels are used (see Sect. 4.2), the quality of energy conversion cannot be inferred from consumption data. Thus the specification of net efficiency is fundamentally preferable. Standard ISO fuel consumptions relate to a fuel (DF) with  $H_u = 42 \text{ MJ}/\text{kg}$ . This allows the following conversion for specifications of fuel consumption in  $\text{g}/\text{kWh}$ :

$$\eta_e = 85.7/b_e \quad \text{and} \quad b_e = 85.7/\eta_e.$$

### Specific Air Flow Rate or Air Consumption

Analogous to specific consumption, the total air flow rate  $\dot{m}_L$  (see Sect. 2.1.1) yields an engine's specific air flow rate or consumption (see Table 1-3):


$$l_e = \dot{m}_L/P_e,$$

Thus, the following applies to the total air/fuel ratio:

$$\lambda = l_e/(b_e \cdot L_{\min}).$$

<sup>2</sup> Common standards include Part 1 of DIN ISO 3046, DIN 70020 (11/76) specifically for motor vehicle engines and ECE Regulation 120 for "internal combustion engines to be installed in agricultural and forestry tractors and in non-road mobile machinery".

<sup>3</sup> Occasionally applied, the term " $p_e \cdot c_m$ " [1-17] yields 158 ( $\text{bar} \cdot \text{m}/\text{s}$ ) for the low speed engine and 252 ( $\text{bar} \cdot \text{m}/\text{s}$ ) for the BMW engine. Since the different working processes are disregarded, the product " $p_e \cdot c_m$ " is not a real variable. Moreover, the specification in ( $\text{bar} \cdot \text{m}/\text{s}$ ) defies any sound analysis.

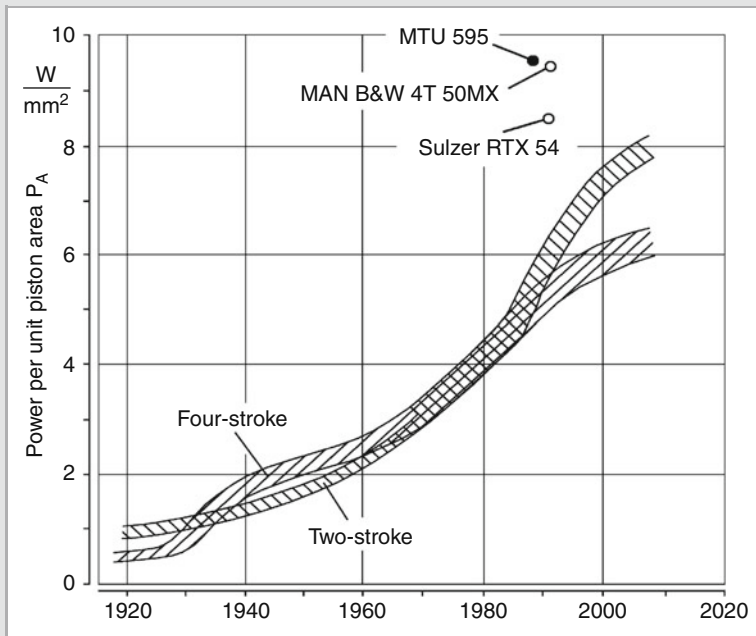**Fig. 1-13**

Development of the power per unit piston area  $P_A$  of large diesel engines; maximum values of two-stroke (Sulzer RTX54) and four-stroke (MAN B&W 4T 50MX) experimental engines and a production engine (MTU 595)

### Engine Characteristic Map

As a rule, the use of an engine to drive stationary systems or vehicles requires adjusting the engine characteristic map of the curve of torque  $M$  as a function of speed: As full load torque is approached, the air/fuel ratio  $\lambda_v$  drops so that the


smoke limit is reached at  $\lambda_v \rightarrow \lambda_{\min}$ . This corresponds to a smoke number still considered acceptable. As the speed limits  $n_A$  and  $n_N$  (starting and rated speed) increasingly spread, vehicle engines exhibit a spike in the average speed range, which gives them far more flexible responsiveness (Fig. 1-14).

**Table 1-3** Operating values of diesel engines at nominal load

Engine type	Specific fuel consumption $b_e$ [g/kWh]	Spec. flow rate $l_e$ [kg/kWh]	Air/fuel ratio $\lambda_v$	Specific oil consumption $b_o$ [g/kWh]	Exhaust gas temperature $T_A$ after turbine [°C]
Car diesel engines:					
- without supercharging	265	4.8	1.2	<0.6	710
- with exhaust gas turbocharging	260	5.4	1.4	<0.6	650
Commercial vehicle diesel engines* with exhaust gas turbocharging and intercooling	205	5.0	1.6	<0.2	550
High performance diesel engines	195	5.9	1.8	<0.5	450
Medium speed four-stroke diesel engines	180	7.2	2.2	0.6	320
Low speed two-stroke diesel engines	170	8.0	2.1	1.1	275

\* for heavy commercial vehicles and buses.

Note: While the specific air flow rate  $l_e$  not only includes the combustion air but also the scavenging air, the combustion air ratio  $\lambda_v$ , only incorporates the mass of the combustion air. The specified mean values cover a range of approximately  $\pm 5\%$ .

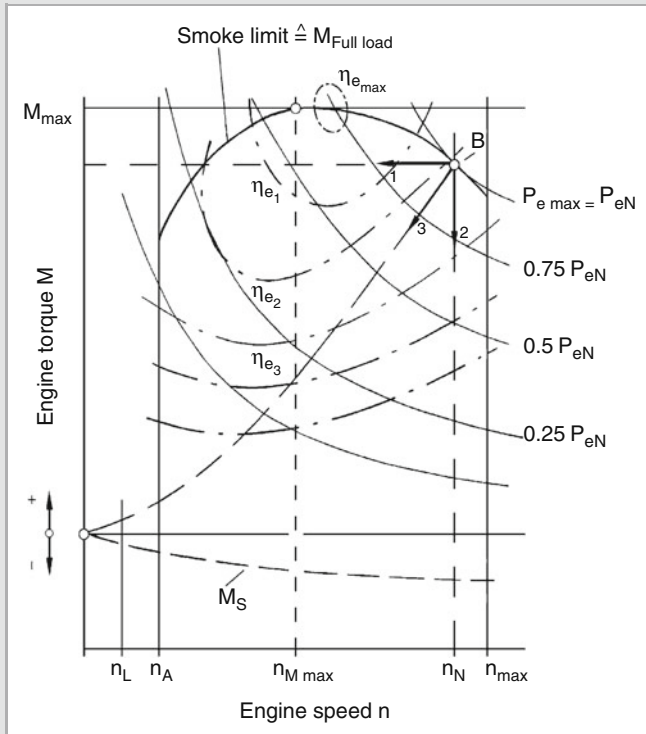

**Fig. 1-14**

Map representation of engine torque  $M$  with lines  $P_e = \text{const.}$  and  $\eta_e = \text{const.}$  and specification of selected engine characteristic maps. 1 speed decrease at rated engine torque, 2 generator operation and 3 propeller curve

Apart from the smoke limit and the power hyperbolae (curves of constant power), such engine maps also often include curves of constant efficiency and specific fuel consumption or other engine parameters. Some specific engine characteristic maps are:

1. speed decrease at rated engine torque:  $M = \text{const.}$  and  $n = \text{variable}$ ,
2. generator operation:  $M = \text{variable}$  and  $n = \text{const.}$ ,
3. propeller operation:  $M \sim n^2$ .

Depending on the rolling resistance, the entire map range can be covered for the vehicle drive including motored operation with drag torque  $M_s$ . "Speed decrease at rated engine torque" ought to be avoided in supercharged engines, since the decreasing air/fuel ratio can cause thermal overloading in limit loaded engines (see Sect. 2.2).

Corresponding to the engine characteristic map specified by the rolling resistance curves, the vehicle drive requires an adjustment of the characteristic map by converting the torque with a transmission system (Fig. 1-15). The map is limited by the maximum transferrable torque  $M_{R\text{max}}$  at the gear wheel ("slip limit"), the maximum engine or gear wheel speed  $n_R$  and the torque characteristic for  $P_{\text{max}} = \text{const.}$  denoted as the "ideal traction

hyperbola". The following applies to the torque  $M_R$  acting on the gear wheel incorporating the reduction  $i_{\text{ges}}$  (gear stage, axle drive and differential) and all mechanical losses with  $\eta_{\text{ges}}$ :

$$M_R = i_{\text{ges}} \cdot \eta_{\text{ges}} \cdot M.$$

At a running speed of  $c_F = 2 \cdot \pi \cdot R \cdot n_R$ , the following applies to driving performance that overcomes all rolling resistance  $\Sigma F_W$ :


$$P_R = 2 \cdot \pi \cdot n_R \cdot M_R = C_F \cdot \Sigma F_W.$$

Transmission design matched to the consumption map (Fig. 1-14) can achieve favorable fuel consumption with good driving comfort (see Sect. 17.1).

## 1.3 Combustion Cycle Simulation

### 1.3.1 Introduction

The processes in a diesel engine cylinder run intensely transiently since the working cycles of compression, combustion, expansion and charge follow one another in fractions of a second. Hence, it is impossible to use the simple means of the ideal standard cycle to simulate a diesel engine accurately

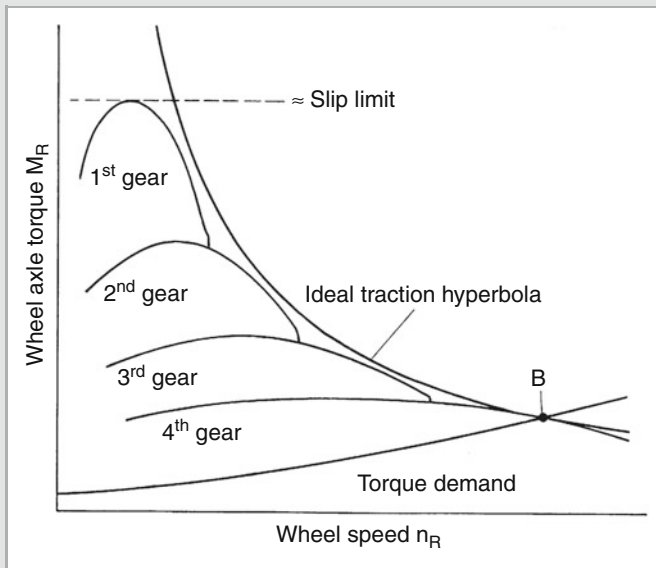

**Fig. 1-15**  
Engine characteristic maps for a vehicle engine with four-speed transmission

enough for engine development. Rather, the differential equations of mass and energy conservation must be solved mathematically, incorporating thermal and calorific state equations.

The rapid development of data processing made it possible to solve these differential equations mathematically for the first time in the 1960s [1-18]. Since the mathematical work helped reduce high test bench costs, the first tests were performed in the large engine industry.

In the meantime, combustion cycle simulation has become a standard tool in engine development and will continue to gain importance in the future [1-19]. Applications range from simple descriptions of the processes in a cylinder up through the complex, transient processes for transient additional loading of diesel engines with two-stage sequential turbocharging allowing for dynamic user behavior [1-20–1-22].

Thermodynamic analysis of the cylinder pressure curve constitutes state-of-the-art testing today. Thanks to advanced computers, it is not only able to ascertain the instantaneous combustion characteristic but also other operating parameters such as the residual exhaust gas in a cylinder in real time [1-23]. This can be built upon for control based on cylinder pressure for new combustion systems, e.g. the HCCI system, for use in mass production, provided accurate and stable pressure sensors are available.

Naturally, an introduction to engine process simulation cannot treat every thermodynamically interesting engine assembly such as the cylinder, exhaust gas turbocharger or air and exhaust manifold systems. Hence, taking modeled thermodynamic processes in a cylinder without a divided

combustion chamber as an example, the following sections only explain the fundamentals of engine process simulation. The individual sections provide references to more detailed literature.

## 1.3.2 Thermodynamic Foundations of Engine Process Simulation

### 1.3.2.1 General Assumptions

#### Thermodynamic Cylinder Model

The assumptions put forth in Sect. 1.2 to analyze the ideal combustion cycle can no longer be retained by engine process simulation that simulates the change of state of the cylinder charge (pressure, temperature, mass, composition, etc.) during a combustion cycle. Suitable thermodynamic models must be defined for both the individual cylinder and the process boundary conditions such as energy release by combustion, wall heat losses or the conditions before and after the cylinder (Table 1-4).

System boundaries are set for the cylinder's working chamber (Fig. 1-16). To this end, the pressure, temperature and composition of the gases in the cylinder are generally assumed to be alterable as a function of time and thus crank angle, yet independent of their location in the cylinder. Consequently, the cylinder charge is considered homogeneous. This is referred to as a single zone model. Naturally, this premise does not correspond to the actual processes in a diesel engine cylinder; however, it yields computerized results that are accurate enough for most development

**Table 1-4** Differences of different submodels in the ideal and real cycle

Submodel	Ideal cycle	Real cycle
Physical properties	Ideal gas	Real gas; composition changes during the cycle
Gas exchange	$c_p, c_v, \kappa = \text{constant}$	Physical properties are a function of pressure, temperature and composition
Combustion	Gas exchange as heat dissipation	Mass exchange through the valves, residual exhaust gas remains in the cylinder
Wall heat losses	Complete combustion based on specified, idealized regularity	Different combustion characteristics possible depending on mixture formation and combustion cycle; fuel burns partially or incompletely
Leaks	Wall heat losses are ignored	Wall heat losses are factored in
	Leaks are ignored	Leaks are partially factored in, however ignored in this introduction

work as long as there is no intention to simulate concentrations of pollutants. The formation mechanisms of pollutants, especially nitrogen oxides, are highly dependent on temperature and require the temperature in the burned mixture (post-flame zone) as an input value. It is significantly higher than the energy-averaged temperature of the single zone model. In this case, the cylinder charge is divided into two zones (two zone model [1-24–1-27]). One zone contains the unburned components of fresh air, fuel and residual exhaust gas (relatively low temperature), the other zone the reaction products of exhaust gas and unutilized air (high temperature). Both zones are separated by an infinitesimally small flame front in which the (primary) fuel oxidizes. Figure 1-17 presents both the average temperature of the single zone model and the temperatures of both zones of the two zone model for a diesel engine's high pressure cycle. Clearly, the burned zone has a

significantly higher temperature level than in the single zone model. Nonetheless, only the single zone model will be examined to introduce the methods of real cycle simulation.

### Thermal and Calorific Equations of State

The state of the charge in the cylinder is described by pressure  $p$ , temperature  $T$ , volume  $V$  and composition (masses  $m_i$  of the components  $i$ ). A physical relation exists between these values, the thermal equation of state. In the case of the ideal gas, it is:

$$p \cdot V = m \cdot R \cdot T \quad (1-16)$$

where  $R$  is the gas constants and the total mass  $m$  is the total of the partial masses of the individual components:

$$m = m_1 + m_2 + \dots + m_i \quad (1-17)$$

If the cylinder charge is regarded as a real gas, then Eq. (1-16) must be replaced by one of the many equations of state for real gases familiar from the literature (e.g. Justi [1-28], Zacharias [1-29]).


With the aid of the calorific equation of state, the state variables  $p$  and  $T$  yield the specific internal energy  $u_i$  for every component  $i$ . In the case of the ideal gas, this is


$$du_i(T) = c_{v,i}(T) \cdot dT \quad (1-18)$$

where  $c_v$  is the specific isochoric thermal capacity. As a rule,  $c_v$  is a function of temperature. In the case of real gases,  $c_v$  and thus  $u$  is a function of temperature and pressure and can, for example, be taken from appropriate collections of tables or calculated [1-30–1-32, 1-27, 1-29].

### Laws of Mass and Energy Conservation

The cylinder contains a charge mass  $m$  with a certain composition. The mass can change by being fed in or drawn off through the intake valve  $dm_E$ , the exhaust valve  $dm_A$  or the injection valve  $dm_B$ . (Gas losses by leaks are disregarded

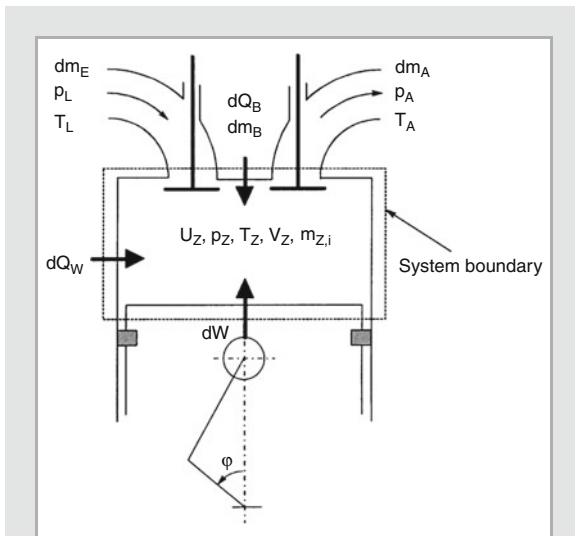**Fig. 1-16** Thermodynamic model of the cylinder

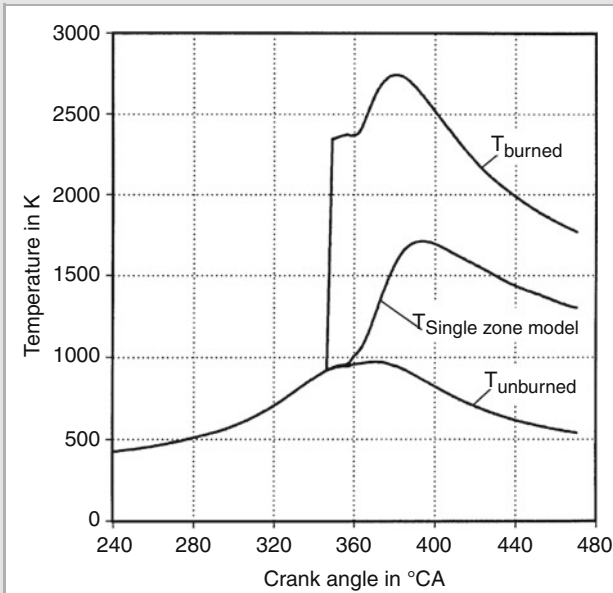

**Fig. 1-17**  
Temperature curves for single and two zone models

here). The law of mass conservation yields the following equation:

$$dm = dm_E + dm_A + dm_B \quad (1-19)$$

The influent masses are entered positively in Eq. (1-19) and the effluent masses negatively.

The first law of thermodynamics describes the conservation of energy. It states that the energy inside the cylinder  $U$  can only change when enthalpy  $dH$  is supplied or removed through the system boundary in conjunction with mass  $dm$ , heat  $dQ_W$  or work ( $dW = -p \cdot dV$ ). The energy released by the combustion of the injected fuel is regarded as internal heat input  $dQ_B$ . The law of energy conservation from the first law of thermodynamics describes the correlation between the individual forms of energy:

$$dW + dQ_W + dQ_B + dH_E + dH_A + dH_B = dU \quad (1-20)$$

When the individual terms of this differential equation are known, then it can be solved with appropriate mathematical methods. The Runge-Kutta method (cf. [1-33]) or algorithms derived from it are usually applied. First, the initial state in the cylinder when “intake closes” is estimated and then Eq. (1-20) is integrated with the algorithm selected for one combustion cycle in small crank angle steps. A check at the end of the combustion cycle to determine whether the estimated initial state is produced when the “intake closes”. If this is not the case, improved estimated values are employed to calculate combustion cycles until the estimated values are reproduced with sufficient accuracy.

## Wall Heat Losses

Wall heat losses are calculated according to the relationship

$$\frac{dQ_W}{d\varphi} = \frac{1}{\omega} \cdot h \cdot A \cdot (T - T_W) \quad (1-21)$$

where the angular velocity is  $\omega = 2 \cdot \pi \cdot n$ , the mean heat transfer coefficient  $\alpha$ , the heat transferring area  $A$  and the wall temperature  $T_W$ . The heat transferring area consists of the areas of the cylinder head, piston crown and cylinder liner enabled for the particular crank angle. Either known from measurements or estimated, an average wall temperature is needed for every area. Since exhaust valves have a significantly higher temperature than the cylinder head, the area of the cylinder head is normally divided into the exhaust valve area and remaining area.

Many authors already deal with calculating the heat transfer coefficient before beginning to simulate the engine process. The equation used most today stems from Woschni [1-34] (see Sect. 7.2 and [1-26, 1-35, 1-27]).

## Gas Exchange

The enthalpies of the masses flowing in and out through the intake and exhaust valves are produced from the product of specific enthalpy  $h$  and mass change  $dm$ :

$$\begin{aligned} dH_E &= h_E \cdot dm_E \\ dH_A &= h_A \cdot dm_A \end{aligned} \quad (1-22)$$