

Second Edition

# An Introduction to Applied and Environmental Geophysics

John M. Reynolds





# **An Introduction to Applied and Environmental Geophysics**



# **An Introduction to Applied and Environmental Geophysics**

**2nd Edition**

**John M. Reynolds**

*Reynolds International Ltd*

 **WILEY-BLACKWELL**

A John Wiley & Sons, Ltd., Publication

This edition first published 2011 © 2011 by John Wiley & Sons, Ltd.

Wiley-Blackwell is an imprint of John Wiley & Sons, formed by the merger of Wiley's global Scientific, Technical and Medical business with Blackwell Publishing.

*Registered office:* John Wiley & Sons, Ltd, The Atrium, Southern Gate, Chichester, West Sussex, PO19 8SQ, UK

*Editorial offices:* 9600 Garsington Road, Oxford, OX4 2DQ, UK  
The Atrium, Southern Gate, Chichester, West Sussex, PO19 8SQ, UK  
111 River Street, Hoboken, NJ 07030-5774, USA

For details of our global editorial offices, for customer services and for information about how to apply for permission to reuse the copyright material in this book please see our website at [www.wiley.com/wiley-blackwell](http://www.wiley.com/wiley-blackwell).

The right of the author to be identified as the author of this work has been asserted in accordance with the UK Copyright, Designs and Patents Act 1988.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, except as permitted by the UK Copyright, Designs and Patents Act 1988, without the prior permission of the publisher.

Designations used by companies to distinguish their products are often claimed as trademarks. All brand names and product names used in this book are trade names, service marks, trademarks or registered trademarks of their respective owners. The publisher is not associated with any product or vendor mentioned in this book. This publication is designed to provide accurate and authoritative information in regard to the subject matter covered. It is sold on the understanding that the publisher is not engaged in rendering professional services. If professional advice or other expert assistance is required, the services of a competent professional should be sought.

Library of Congress Cataloging-in-Publication Data

Reynolds, John M.

An introduction to applied and environmental geophysics / John M. Reynolds. – 2nd ed.

p. cm.

Includes index.

Summary: "The book covers a range of applications including mineral and hydrocarbon exploration but the greatest emphasis is on the use of geophysics in civil engineering, and in environmental and groundwater investigations" – Provided by publisher.

ISBN 978-0-471-48535-3 (hardback) 978-0-471-485360 (paperback)

1. Geophysics–Technique. 2. Seismology–Technique. I. Title.

QC808.5.R49 2011

624.1'51–dc22

2010047246

A catalogue record for this book is available from the British Library.

This book is published in the following electronic format: ePDF 9780470975015, ePub 9780470975442

Set in 9.5/12pt Minion by Aptara Inc., New Delhi, India.

First Impression 2011

# Contents

<b>Preface to the 2<sup>nd</sup> Edition</b>	<b>xi</b>		
<b>Acknowledgements</b>	<b>xiii</b>		
<b>1 Introduction</b>	<b>1</b>		
1.1 What are 'applied' and 'environmental' geophysics?	1		
1.2 Geophysical methods	3		
1.3 Matching geophysical methods to applications	5		
1.4 Planning a geophysical survey	5		
1.4.1 General philosophy	5		
1.4.2 Planning strategy	5		
1.4.3 Survey constraints	7		
1.5 Geophysical survey design	9		
1.5.1 Target identification	9		
1.5.2 Optimum line configuration and survey dimensions	9		
1.5.3 Selection of station intervals	11		
1.5.4 Noise	13		
1.5.5 Position fixing	15		
1.5.6 Data analysis	16		
<b>2 Gravity Methods</b>	<b>19</b>		
2.1 Introduction	19		
2.2 Physical basis	19		
2.2.1 Theory	19		
2.2.2 Gravity units	20		
2.2.3 Variation of gravity with latitude	20		
2.2.4 Geological factors affecting density	22		
2.3 Measurement of gravity	24		
2.3.1 Absolute gravity	24		
2.3.2 Relative gravity	25		
2.4 Gravity meters	26		
2.4.1 Stable (static) gravimeters	27		
2.4.2 Unstable (astatic) gravimeters	27		
2.4.3 Marine and airborne gravity systems	31		
2.5 Corrections to gravity observations	34		
2.5.1 Instrumental drift	34		
2.5.2 Tides	34		
2.5.3 Latitude	35		
2.5.4 Free-air correction	35		
2.5.5 Bouguer correction	36		
2.5.6 Terrain correction	38		
2.5.7 Building corrections	41		
2.5.8 Eütvös correction	41		
2.5.9 Isostatic correction	44		
2.5.10 Miscellaneous factors	45		
2.5.11 Bouguer anomaly	45		
2.6 Interpretation methods	45		
2.6.1 Regionals and residuals	46		
2.6.2 Anomalies due to different geometric forms	47		
2.6.3 Depth determinations	51		
2.6.4 Mass determination	52		
2.6.5 Second derivatives	53		
2.6.6 Sedimentary basin or granite pluton?	55		
2.7 Applications and case histories	59		
2.7.1 Mineral exploration	59		
2.7.2 Engineering applications	59		
2.7.3 Archaeological investigations	66		
2.7.4 Hydrogeological applications	67		
2.7.5 Volcanic hazards	71		
2.7.6 Glaciological applications	78		
<b>3 Geomagnetic Methods</b>	<b>83</b>		
3.1 Introduction	83		
3.2 Basic concepts and units of geomagnetism	83		
3.2.1 Flux density, field strength and permeability	83		
3.2.2 Susceptibility	84		
3.2.3 Intensity of magnetisation	84		
3.2.4 Induced and remanent magnetisation	85		
3.2.5 Diamagnetism, paramagnetism, and ferri- and ferro-magnetism	85		
3.3 Magnetic properties of rocks	87		
3.3.1 Susceptibility of rocks and minerals	87		
3.3.2 Remanent magnetisation and Königsberger ratios	88		

3.4	The Earth's magnetic field	89	4.3.1	Reflection and transmission of normally incident rays	149
3.4.1	Components of the Earth's magnetic field	89	4.3.2	Reflection and refraction of obliquely incident rays	150
3.4.2	Time variable field	94	4.3.3	Critical refraction	151
3.5	Magnetic instruments	95	4.3.4	Diffractions	151
3.5.1	Torsion and balance magnetometers	95	4.4	Loss of seismic energy	152
3.5.2	Fluxgate magnetometers	95	4.4.1	Spherical divergence or geometrical spreading	152
3.5.3	Resonance magnetometers	97	4.4.2	Intrinsic attenuation	153
3.5.4	Cryogenic (SQUID) magnetometers	99	4.4.3	Scattering	154
3.5.5	Gradiometers	99	4.5	Seismic energy sources	154
3.5.6	Airborne magnetometer systems	100	4.5.1	Impact devices	155
3.6	Magnetic surveying	100	4.5.2	Impulsive sources	157
3.6.1	Field survey procedures	100	4.5.3	Explosive sources	159
3.6.2	Noise and corrections	101	4.5.4	Non-explosive sources	159
3.6.3	Data reduction	103	4.5.5	High-resolution waterborne sources	162
3.7	Qualitative interpretation	103	4.5.6	Vibrators	163
3.7.1	Profiles	105	4.5.7	Animals	166
3.7.2	Pattern analysis on aeromagnetic maps	105	4.6	Detection and recording of seismic waves	169
3.8	Quantitative interpretation	107	4.6.1	Geophones and accelerometers	170
3.8.1	Anomalies due to different geometric forms	110	4.6.2	Hydrophones and streamers	171
3.8.2	Simple depth determinations	112	4.6.3	Seismographs	177
3.8.3	Reduction to the Pole (RTP)	115	<b>5</b>	<b>Seismic Refraction Surveying</b>	<b>179</b>
3.8.4	Modelling in two and three dimensions	115	5.1	Introduction	179
3.8.5	Depth determinations and Euler deconvolution	118	5.2	General principles of refraction surveying	179
3.9	Applications and case histories	123	5.2.1	Critical refraction	179
3.9.1	Regional aeromagnetic investigations	123	5.2.2	Field survey arrangements	181
3.9.2	Mineral exploration	125	5.3	Geometry of refracted raypaths	182
3.9.3	Detection of underground pipes	126	5.3.1	Planar interfaces	182
3.9.4	Detection of buried containers	127	5.3.2	Irregular (non-planar) interfaces	185
3.9.5	Landfill investigations	128	5.4	Interpretational methods	186
3.9.6	Acid tar lagoon survey	133	5.4.1	Phantoming	187
3.9.7	Unexploded Ordnance (UXO)	136	5.4.2	Hagedoorn plus-minus method	188
			5.4.3	Generalised reciprocal method (GRM)	190
<b>4</b>	<b>Applied Seismology: Introduction and Principles</b>	<b>143</b>	5.4.4	Hidden-layer problem	191
4.1	Introduction	143	5.4.5	Effects of continuous velocity change	192
4.2	Seismic waves	144	5.4.6	Seismic refraction software	193
4.2.1	Stress and strain	144	5.5	Applications and case histories	193
4.2.2	Types of seismic waves	145	5.5.1	Rockhead determination for a proposed waste disposal site	193
4.2.3	Seismic wave velocities	147	5.5.2	Location of a buried doline	197
4.3	Raypath geometry in layered ground	149			

5.5.3	Assessment of rock quality	199	6.6.4	Geophysical diffraction tomography in palaeontology	283
5.5.4	Landfill investigations	201	6.6.5	Forensic seismology	286
5.5.5	Acid-tar lagoons	203			
5.5.6	Static corrections	205	<b>7</b>	<b>Electrical Resistivity Methods</b>	<b>289</b>
5.5.7	Locating buried miners	207	7.1	Introduction	289
5.6	Shear wave methods	208	7.2	Basic principles	289
5.6.1	Ground stiffness profiling	208	7.2.1	True resistivity	289
5.6.2	Multichannel Analysis of Shear Waves (MASW)	211	7.2.2	Current flow in a homogeneous earth	292
5.6.3	Earthquake hazard studies	215	7.3	Electrode configurations and geometric factors	293
<b>6</b>	<b>Seismic Reflection Surveying</b>	<b>217</b>	7.3.1	General case	293
6.1	Introduction	217	7.3.2	Electrode configurations	294
6.2	Reflection surveys	217	7.3.3	Media with contrasting resistivities	298
6.2.1	General considerations	217	7.4	Modes of deployment	301
6.2.2	General reflection principles	218	7.4.1	Vertical electrical sounding (VES)	301
6.2.3	Two-dimensional survey methods	219	7.4.2	Automated array scanning	303
6.2.4	Three-dimensional surveys	221	7.4.3	Electrical resistivity tomography (ERT)	306
6.2.5	Vertical seismic profiling (VSP)	224	7.4.4	Constant separation traversing (CST)	307
6.2.6	Cross-hole seismology: tomographic imaging	225	7.4.5	Field problems	308
6.3	Reflection data processing	228	7.5	Interpretation methods	311
6.3.1	Preprocessing	229	7.5.1	Qualitative approach	311
6.3.2	Static corrections (field statics)	230	7.5.2	Master curves	313
6.3.3	Convolution and deconvolution	233	7.5.3	Curve matching by computer	314
6.3.4	Dynamic corrections, velocity analyses and stacking	236	7.5.4	Equivalence and suppression	317
6.3.5	Filtering	241	7.5.5	Inversion and deconvolution	318
6.3.6	Migration	243	7.5.6	Modelling in 2D and 3D	321
6.4	Correlating seismic data with borehole logs and cones	246	7.6	ERT applications and case histories	326
6.4.1	Sonic and density logs, and synthetic seismograms	246	7.6.1	Engineering site investigations	326
6.4.2	Correlation with cone penetration testing	247	7.6.2	Groundwater and landfill surveys	330
6.5	Interpretation	250	7.6.3	Mineral exploration	333
6.5.1	Vertical and horizontal resolution	250	7.6.4	Glaciological applications	333
6.5.2	Identification of primary and secondary events	252	7.7	Mise-à-la-masse (MALM) method	336
6.5.3	Potential interpretational pitfalls	256	7.7.1	Mineral exploration	338
6.6	Applications	257	7.7.2	Civil engineering pile testing	341
6.6.1	High-resolution seismic profiling on land	257	7.7.3	Study of tree roots	344
6.6.2	Seismic reflection surveys for earthquake prediction studies	265	7.7.4	Groundwater flow	344
6.6.3	High-resolution seismic profiling over water	266	7.8	Leak detection through artificial membranes	346
			<b>8</b>	<b>Spontaneous (Self) Potential Methods</b>	<b>349</b>
			8.1	Introduction	349
			8.2	Occurrence of self-potentials	349
			8.3	Origin of self-potentials	349
			8.3.1	Electrokinetic potentials	350

8.3.2	Electrochemical potentials	351	10.1.3	Types of EM systems	404
8.3.3	Mineral potentials	352	10.2	Principles of EM surveying	407
8.4	Measurement of self-potentials	353	10.2.1	Electromagnetic waves	407
8.5	Corrections to SP data	354	10.2.2	Polarisation	410
8.6	Interpretation of self-potential anomalies	354	10.2.3	Depth of penetration of EM radiation	411
8.6.1	Qualitative interpretation	354	10.3	Airborne EM surveying	411
8.6.2	Quantitative interpretation	355	10.3.1	Background	411
8.7	Applications and case histories	357	10.3.2	Frequency-domain EM (FEM)	412
8.7.1	Geothermal exploration	357	10.3.3	Time-domain EM (TEM)	414
8.7.2	Mineral exploration	359	10.3.4	Airborne VLF-EM	418
8.7.3	Hydrogeology	361	10.4	Seaborne EM surveying	418
8.7.4	Landfills and contaminant plumes	363	10.4.1	Background	418
8.7.5	Leak detection	364	10.4.2	Details of marine EM systems	421
8.7.6	Mapping mine shafts	370	10.5	Borehole EM surveying	426
8.8	Electrokinetic (EK) surveying	371	<b>11</b>	<b>Electromagnetic Methods: Systems and Applications</b>	<b>431</b>
<b>9</b>	<b>Induced Polarisation</b>	<b>373</b>	11.1	Introduction	431
9.1	Introduction	373	11.2	Continuous-wave (CW) systems	431
9.2	Origin of induced polarisation effects	374	11.2.1	Tilt-angle methods	431
9.2.1	Grain (electrode) polarisation	374	11.2.2	Fixed-source systems (Sundberg, Turam)	432
9.2.2	Membrane (electrolytic) polarisation	375	11.2.3	Moving-source systems	433
9.2.3	Macroscopic processes	375	11.2.4	Interpretation methods	437
9.2.4	Ionic processes	376	11.2.5	Applications and case histories	441
9.3	Measurement of induced polarisation	376	11.3	Pulse-transient (TEM) or time-domain (TDEM) EM systems	467
9.3.1	Time-domain measurements	376	11.3.1	TDEM/TEM surveys	467
9.3.2	Frequency-domain measurements	377	11.3.2	Data processing and interpretation of TEM surveys	468
9.3.3	Spectral IP and complex resistivity	379	11.3.3	Applications and case histories	470
9.3.4	Noise reduction and electromagnetic coupling	381	<b>12</b>	<b>Electromagnetic Methods: Systems and Applications II</b>	<b>495</b>
9.3.5	Forms of display of IP data	382	12.1	Very-low-frequency (VLF) methods	495
9.3.6	Inversion and fitting dispersion spectra	383	12.1.1	Introduction	495
9.4	Applications and case histories	384	12.1.2	Principles of operation	495
9.4.1	Base metal exploration	384	12.1.3	Effect of topography on VLF observations	498
9.4.2	Hydrocarbon exploration	389	12.1.4	Filtering and interpretation of VLF data	498
9.4.3	Geothermal surveys	390	12.1.5	Applications and case histories	499
9.4.4	Groundwater investigations	391	12.2	The telluric method	502
9.4.5	Environmental applications	392	12.2.1	Principles of operation	502
9.4.6	Geological investigations	398	12.2.2	Field measurements	503
<b>10</b>	<b>Electromagnetic Methods: Introduction and Principles</b>	<b>403</b>	12.3	The magnetotelluric (MT) method	505
10.1	Introduction	403	12.3.1	Principles of operation	505
10.1.1	Background	403	12.3.2	Field measurements	505
10.1.2	Applications	404	12.3.3	Interpretation methods	507

12.3.4	Applications and case histories	509	14.4	Engineering applications on manmade structures	587
12.4	Magnetic Resonance Sounding (MRS)	519	14.4.1	Underground storage tanks (USTs), pipes and cables	588
12.4.1	Principles of operation	519	14.4.2	Transportation infrastructure	592
12.4.2	Field measurements	522	14.4.3	Dams and embankments	594
12.4.3	Interpretation methods	525	14.4.4	Golf courses	597
12.4.4	Case histories	525	14.5	Voids within manmade structures	599
<b>13</b>	<b>Introduction to Ground-Penetrating Radar</b>	<b>535</b>	14.5.1	Voids behind sewer linings	600
13.1	Introduction	535	14.5.2	Buried crypts and cellars	600
13.2	Principles of operation	537	14.5.3	Coastal defences	602
13.3	Propagation of radiowaves	539	14.6	Archaeological investigations	603
13.3.1	Theory	539	14.6.1	Roman roads	603
13.3.2	Energy loss and attenuation	540	14.6.2	Historical graves	603
13.3.3	Horizontal and vertical resolution	544	14.6.3	Buried Roman structures	604
13.4	Dielectric properties of earth materials	546	14.6.4	Burial mounds	605
13.5	Modes of data acquisition	552	14.7	Forensic uses of GPR	607
13.5.1	Radar reflection profiling	552	14.8	Wide-aperture radar mapping and migration processing	607
13.5.2	Wide-angle reflection and refraction (WARR) sounding	553	14.9	Borehole radar	609
13.5.3	Trans-illumination or radar tomography	553	14.9.1	Hydrogeological investigations	612
13.6	Data processing	554	14.9.2	Mining	613
13.6.1	During data acquisition	556	14.10	UXO and landmine detection	617
13.6.2	Wide-angle reflection and refraction (WARR) sounding	556	14.11	Animals	618
13.6.3	Post-recording data processing	557	<b>15</b>	<b>Radiometrics</b>	<b>625</b>
13.7	Interpretation techniques	560	15.1	Introduction	625
13.7.1	Basic interpretation	560	15.2	Natural radiation	625
13.7.2	Quantitative analysis	562	15.2.1	Isotopes	625
13.7.3	Interpretational pitfalls	562	15.2.2	$\alpha$ and $\beta$ particles, and $\gamma$ radiation	626
<b>14</b>	<b>Ground-Penetrating Radar: Applications and Case Histories</b>	<b>565</b>	15.2.3	Radioactive decay series and radioactive equilibria	626
14.1	Geological mapping	565	15.2.4	Natural gamma-ray spectra	627
14.1.1	Sedimentary sequences	565	15.3	Radioactivity of rocks	628
14.1.2	Lacustrine environments	567	15.4	Radiation detectors	628
14.1.3	Geological faults	570	15.4.1	Geiger-Müller counter	628
14.2	Hydrogeology and groundwater contamination	571	15.4.2	Scintillometers	629
14.2.1	Groundwater contamination	571	15.4.3	Gamma-ray spectrometers	630
14.2.2	Mapping the water table	576	15.4.4	Radon detectors	630
14.3	Glaciological applications	578	15.4.5	Seaborne systems	631
14.3.1	Polar ice sheets	578	15.4.6	Borehole logging tools	632
14.3.2	Snow stratigraphy and crevasse detection	581	15.5	Data correction methods	633
14.3.3	Temperate glaciers	583	15.5.1	Detector calibration	633
14.3.4	Glacial hazards	586	15.5.2	Thorium source test	633
			15.5.3	Dead time and live time	633
			15.5.4	Geometric corrections	633
			15.5.5	Environmental factors	634
			15.5.6	Compton scattering	634
			15.5.7	Terrain clearance corrections	634
			15.5.8	Radio-element ground concentrations	635
			15.6	Radiometric data presentation	635

15.7	Case histories	636	<b>Appendix</b>	<b>645</b>
15.7.1	Mineral exploration	636	<b>References</b>	<b>649</b>
15.7.2	Engineering applications	638	<b>Index</b>	<b>681</b>
15.7.3	Soil mapping	639		
15.7.4	Nuclear waste disposal investigations	642		

# Preface to the 2<sup>nd</sup> Edition

The idea for this book originated in 1987 while I was preparing for lectures on courses in applied geology and environmental geophysics at Plymouth Polytechnic (now the University of Plymouth), Devon, England. Students who had only very basic mathematical skills and little if any physics background found most of the so-called 'introductory' texts difficult to follow owing to the perceived opacity of text and daunting display of apparently complex mathematics. To junior undergraduates, this is immediately offputting and geophysics becomes known as a 'hard' subject and one to be avoided at all costs.

I hope that the information on the pages that follow will demonstrate the range of applications of modern geophysics – most now very well established, others very much in the early stages of implementation. It is also hoped that the book will provide a foundation on which to build if the reader wishes to take the subject further. The references cited, by no means exhaustive, have been included to provide pointers to more detailed discussions.

The aim of this book is to provide a basic introduction to geophysics, keeping the mathematics and theoretical physics to a minimum and emphasising the applications. Considerable effort has been expended in compiling a representative set of case histories that demonstrate clearly the issues being discussed.

The first edition of this book was different from other introductory texts in that it paid attention to a great deal of new material, or topics not previously discussed in detail: for example, geophysical survey design and line optimisation techniques, image-processing of potential field data, recent developments in high-resolution seismic reflection profiling, electrical resistivity Sub-Surface Imaging (tomography), Spectral Induced Polarisation, and Ground Penetrating Radar, amongst many other subjects, which until 1997, when the first edition was published, had never featured in detail in such a book. While retaining much of the basic theory and principles from the first edition, the scope of material has been expanded considerably in the second edition to reflect the changes and developments in the subject. Consequently, there is much new material. Many new and unpublished case histories from commercial projects have been included along with recently published examples of applications.

The subject material has been developed over a number of years, firstly while I was at Plymouth, and secondly and more recently while I have been working as a geophysical consultant. Early drafts of the first edition book were tried out on several hundred second- and third-year students who were unwitting 'guinea pigs' – their comments have been very helpful. While working in industry, I have found the need for an introductory book all the more evident.

Many potential clients either appear unaware of how geophysics could possibly be of help to them, or have a very dated view as to the techniques available. There has been no suitable book to recommend to them that explained what they needed and wanted to know or that provided real examples.

Since publication of the first edition, the development of new instruments, improved data processing and interpretation software and increased understanding of physical processes have continued at a seemingly ever-faster rate. Much of this has also been fuelled by the availability of ever more powerful computers and associated technology. It has been difficult keeping abreast of all the new ideas, especially with an ever-growing number of scientific publications and the huge resource now available through the Internet. What is exciting is that the changes are still occurring and we can expect to see yet more novel developments over the next few years. We have seen new branches of the science develop, such as in forensic, agro- and bio-geophysics, as well as techniques mature, particularly in environmental geophysics and applications to contaminated land, for example. There has been a move away from just mapping to more monitoring and time-lapse surveys. There has also been a greater blurring of the boundaries between industrial sectors. Hydrocarbon exploration analytical techniques are now being used in ultra-high resolution engineering investigations, and electromagnetic methods have ventured offshore to become established in hydrocarbon exploration, just two examples amongst many.

It is my hope that this book will be seen as providing a broad overview of applied and environmental geophysics methods, illustrating the power and sophistication of the various techniques, as well as the limitations. If this book helps in improving the acceptance of geophysical methods and in increasing the awareness of the methods available, then it will have met its objective. There is no doubt that applied and environmental geophysics have an important role to play, and that the potential for the future is enormous.

It is inevitable with a book of this kind that brand names, instrument types, and specific manufacturers are named. References to such information does not constitute an endorsement of any product and no preference is implied, nor should any inference be drawn over any omissions. In books of this type the material covered tends to be flavoured by the interests and experience of the author, and I am sure that this one is no exception. I hope that what is included is a fair reflection of the current state of applied and environmental geophysics. Should any readers have any case histories that they feel are of particular significance, I should be most interested to receive

them for possible inclusion at a later date. Also, any comments or corrections that readers might have would be gratefully received.

Another major difference with this edition is that while all the figures included herein are published in black and white greyscale, colour versions of many are included on an accompanying website at: [www.wiley.com/go/reynolds/introduction2e](http://www.wiley.com/go/reynolds/introduction2e), along with the list

of web URLs given in the Appendix. Furthermore, the book is also available in electronic form in its entirety and also as e-chapters, all of which are available for purchase through the Wiley website at [www.wiley.com](http://www.wiley.com).

The figures with a [C] in the captions indicates that the full colour version is available on the website.

# Acknowledgements

Thanks are due to the many companies that have very kindly supplied material, and colleagues around the world for permitting extracts of their work to be reproduced as well as their kind comments about the first edition. A key feature of any technical book is the graphical material. Most of the figures that featured in the first edition and have been used in the second have been redrawn or updated; there have been many brand new figures and extensive graphical work done to enhance the material presented. I must show due recognition to a number of people who have assisted with this mammoth task and worked on the figures for me, especially Holly Rowlands, who has undertaken the majority of this work. Thanks are also due to my colleague Dr Lucy Catt for technical discussions and for her contribution in generating a number of the figures. I

must also thank the editorial and production staff at John Wiley & Sons Ltd for their understanding and patience in waiting so long for the final manuscript, especially Fiona Woods and Rachael Ballard.

My final acknowledgement must be to my wife, Moira, for her support, encouragement and long-suffering patience while I have been closeted with 'The Book'. Without her help, encouragement and forbearance, this second edition would never have been completed.

John M. Reynolds  
Mold, Flintshire, North Wales, UK  
*May 2010*



# 1

## Introduction

### 1.1 What are 'applied' and 'environmental' geophysics?

In the broadest sense, the science of *geophysics* is the application of physics to investigations of the Earth, Moon and planets. The subject is thus related to astronomy. Normally, however, the definition of 'geophysics' is used in a more restricted way, being applied solely to the Earth. Even then, the term includes such subjects as meteorology and ionospheric physics, and other aspects of atmospheric sciences.

To avoid confusion, the use of physics to study the interior of the Earth, from land surface to the inner core, is known as *solid earth geophysics*. This can be subdivided further into *global geophysics*, or alternatively *pure geophysics*, which is the study of the whole or substantial parts of the planet, and *applied geophysics*, which is concerned with investigating the Earth's crust and near-surface to achieve a practical and, more often than not, an economic aim.

'Applied geophysics' covers everything from experiments to determine the thickness of the crust (which is important in hydrocarbon exploration) to studies of shallow structures for engineering site investigations, exploring for groundwater and for minerals and other economic resources, to trying to locate narrow mine shafts or other forms of buried cavities, or the mapping of archaeological remains, or locating buried pipes and cables – but where in general the total depth of investigation is usually less than 100 m. The same scientific principles and technical challenges apply as much to shallow geophysical investigations as to pure geophysics. Sheriff (2002: p. 161) has defined '*applied geophysics*' thus:

*Making and interpreting measurements of physical properties of the Earth to determine sub-surface conditions, usually with an economic objective, e.g. discovery of fuel or mineral depositions.*

'Engineering geophysics' can be described as being:


*The application of geophysical methods to the investigation of sub-surface materials and structures that are likely to have (significant) engineering implications.*

As the range of applications of geophysical methods has increased, particularly with respect to derelict and contaminated land investigations, the subdiscipline of '*environmental geophysics*' has developed (Greenhouse, 1991; Steeples, 1991). This can be defined as being:

*The application of geophysical methods to the investigation of near-surface bio-physico-chemical phenomena that are likely to have (significant) implications for the management of the local environment.*

The principal distinction between engineering and environmental geophysics is more commonly that the former is concerned with structures and types of materials, whereas the latter can also include, for example, mapping variations in pore-fluid conductivities to indicate pollution plumes within groundwater. Chemical effects can be equally as important as physical phenomena. Since the mid-1980s in the UK, geophysical methods have been used increasingly to investigate derelict and contaminated land, with a specific objective of locating polluted areas prior to direct observations using trial pits and boreholes (e.g. Reynolds and Taylor, 1992). Geophysics is also being used much more extensively over landfills and other waste repositories (e.g. Reynolds and McCann, 1992). One of the advantages of using geophysical methods is that they are largely environmentally benign – there is no disturbance of subsurface materials. An obvious example is the location of a corroded steel drum containing toxic chemicals. To probe for it poses the real risk of puncturing it and creating a much more significant pollution incident. By using modern geomagnetic surveying methods, the drum's position can be isolated and a careful excavation instigated to remove the offending object without damage. Such an approach is cost-effective and environmentally safer.

There are obviously situations where a specific site investigation contains aspects of engineering as well as environmental geophysics, and there may well be considerable overlap. Indeed, if each subdiscipline of applied geophysics is considered, they may be represented as shown in Figure 1.1, as overlapping. Also included are six other subdisciplines whose names are largely self-explanatory: namely, *agro-geophysics* (the use of geophysics for agriculture and soil science),

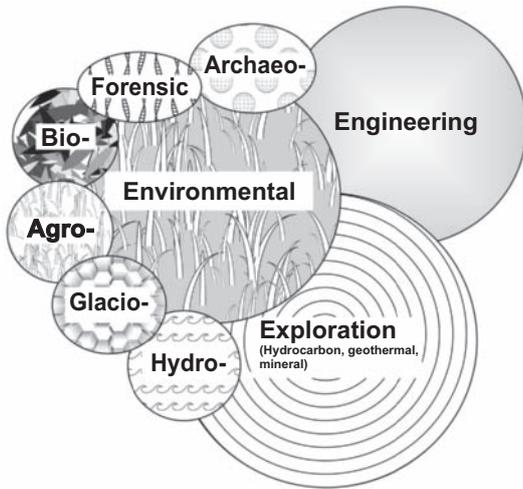

**Figure 1.1** Inter-relationships between the various subdisciplines of applied geophysics. [C]

*archaeo-geophysics* (geophysics in archaeology), *bio-geophysics* (geophysical manifestation of microbial activity within geological materials), *forensic geophysics* (the application of geophysical methods to investigations that might come before a court of law), *glacio-geophysics* (geophysics in glaciology) and *hydro-geophysics* (geophysics in groundwater investigations; see Pellerin *et al.* (2009) and accompanying papers). Glacio-geophysics is particularly well established within the polar scientific communities and has been since the 1950s. The application of ground-based geophysical techniques for glaciological studies (and particularly on temperate glaciers) has come of age especially since the early 1990s (see for example the thematic set of papers on the geophysics of glacial and frozen materials, Kulesa and Woodward (2007)). Forensic geophysics is now recognised as a subdiscipline of forensic geoscience ('geoforensics'; cf. Ruffell and McKinley, 2008) and is used regularly in police investigations in searches for mortal remains, buried bullion, and so on: see Pye and Croft (2003) and Ruffell (2006) for a basic introduction and signposting to other literature. The subdiscipline of bio-geophysics has emerged over the last decade or so (e.g. Williams *et al.* 2005; Slater and Atekwana, 2009) and examines the geophysical signatures of microbial cells in the Earth, the interaction of micro-organisms and subsurface geological materials, and alteration of the physical and chemical properties of geological materials as a result of microbial activity. The microbial activity may be natural, as in microbial bio-mineralisation, or artificial as in the insertion of bacteria into the ground to remediate diesel spills, for example. Perhaps the newest branch is agro-geophysics (Allred *et al.*, 2008; Lück and Müller, 2009), which has emerged over the last decade. Recent examples of these applications of geophysics include water retention capacity of agricultural soils (Lück *et al.*, 2009, effects of long-term fertilisation on soil properties (Werban *et al.*, 2009), and influences of tillage on soil moisture content (Müller *et al.*, 2009).

The general orthodox education of geophysicists to give them a strong bias towards the hydrocarbon industry has largely ignored these other areas of our science. It may be said that this restricted view has delayed the application of geophysics more widely to other

disciplines. Geophysics has been taught principally in Earth Science departments of universities. There is an obvious need for it to be introduced to engineers and archaeologists much more widely than at present. Similarly, the discipline of environmental geophysics needs to be brought to the attention of policy-makers and planners, to the insurance and finance industries (Doll, 1994).

The term 'environmental geophysics' has been interpreted by some to mean geophysical surveys undertaken with environmental sensitivity – that is, ensuring that, for example, marine seismic surveys are undertaken sympathetically with respect to the marine environment (Bowles, 1990). With growing public awareness of the environment and the pressures upon it, the geophysical community has had to be able to demonstrate clearly its intentions to minimise environmental impact (Marsh, 1991). By virtue of scale, the greatest likely impact on the environment is from hydrocarbon and some mineral exploration, and the main institutions involved in these activities are well aware of their responsibilities. In small-scale surveys the risk of damage is much lower, but all the same, it is still important that those undertaking geophysical surveys should be mindful of their responsibilities to the environment and to others whose livelihoods depend upon it.

While the term 'applied geophysics' covers a wide range of applications, the importance of 'environmental' geophysics is particularly highlighted within this book. Although the growth of this discipline has increased dramatically since the 1990s, it has not been as universally accepted as some anticipated. The reasons for this include the reluctance of some engineers to adopt modern geophysical methods, site investigation companies make more money out of drilling and trial pitting, and the perceived high cost of using geophysics rather than appreciating the subsequent 'whole project life' cost-benefit. What is clear, however, is that engineering and environmental geophysics are becoming increasingly important in the management of our environment.

A further major advantage of the use of environmental geophysics in investigating sites is that large areas of the ground can be surveyed quickly at relatively low cost. This provides information to aid the location of trial pits and boreholes. The alternative and more usual approach is to use a statistical sampling technique (e.g. Ferguson, 1992). Commonly, trial pits are located on a 50 m by 50 m grid, and sometimes 25 m by 25 m. The disadvantage of this is that key areas of contamination can easily be missed, substantially reducing the value of such direct investigation. By targeting direct investigations by using a preliminary geophysical survey to locate anomalous areas, there is a much higher certainty that the trial pits and boreholes constructed will yield useful results. Instead of seeing the geophysical survey as a cost, it should be viewed as adding value by making the entire site investigation more cost-effective. For instance, consider the example shown in Table 1.1. On this particular site in northwest London, three successive site investigations had been undertaken over a former industrial site, involving trial pits, boreholes, and stripping 0.3 m off the ground level. For a 2 ha area, only 32 trial pits would have been used to characterise the site, representing sampling of less than 1% by area. Typically, as long as a field crew can gain access to the site on foot and the majority of obstacles have been removed, a geophysical survey can access more than 90% by area of a site. A typical geophysical survey

**Table 1.1** Statistics of the use of geophysical surveys or trial pitting on a 2 ha site.

	Trial pits	Geophysics
Total site area	20,000 m <sup>2</sup>	20,000 m <sup>2</sup>
Area sampled	192 m <sup>2</sup> [<1%]	19,000 m <sup>2</sup> [95%]
Number of samples	32 pits [3 m by 2 m]	9,500 to >38,000 stations
Depth of sampling	1-5 m (notional) <sup>a</sup>	5-6 m (notional)
Contracting costs	~£3,500	~£6,300
Cost/m <sup>2</sup>	£18.23	£0.33
Typical success rate <sup>b</sup>	<10%	>90%
Sampling grid	25 m by 25 m	2 m x 1 m [EM31]; 2 m x <0.2 [mag]
Time on site	4 days	5 days

<sup>a</sup>Depends upon the reach of the mechanical excavator;  
<sup>b</sup>Assuming the target has an area of 5 m by 5 m and has physical properties contrasting with those of the host material.

over a brownfield (former industrial) site would consist of a ground conductivity and magnetic gradiometry survey, using dGPS for position fixing. Consequently, the line interval would commonly be 2 m and with a station interval along the line as small as 0.1 m, using a sampling rate of ten measurements a second and a reasonable walking pace for hand-carried instruments. The relative depths of penetration are as deep as a mechanical excavator can reach, typically down to 5 m below ground level; for the geophysical survey, this is a function of the method and the effective contribution of the target to form an anomaly. For a ground conductivity meter (e.g. Geonics EM31), the nominal depth of penetration is 6 m.

Had intrusive methods alone been used, then the probability of finding a target with dimensions of 5 m by 5 m would be <10%, whereas with geophysical methods (in this case ground conductivity and magnetic gradiometry) the success rate would be greater than 90%. Unfortunately, some clients see only the relative costs of the two methods, and geophysics loses out each time on this basis. However, if the cost-benefit is taken on the basis of the degree of success in finding objects, then the geophysical survey wins by a large margin. This is the difference between *cost* and *cost-benefit*!

Instead of trying to have a competition between intrusive methods OR geophysics, the best practice is to use BOTH, where it is appropriate. By so doing, the geophysical survey can be used to target trial pits onto features that have been identified as anomalies by the geophysical survey. The benefit of this can be seen by reference to the two sets of ground models shown in Figure 1.2 (Reynolds, 2004b). The first model (Figure 1.2A) was produced purely as a consequence of four trial pits and one borehole. The second (Figure 1.2C) was derived following a geophysical survey (Figure 1.2B) and excavating on the locations of geophysical anomalies. It is clear that the combined approach has provided a much better knowledge of the subsurface materials.


Geophysical methods are being seen increasingly not just as a set of tools for site investigation but as a means of risk management. With the growing requirements for audit trails for liability, the risks associated with missing an important feature on a site may

result in large financial penalties or legal action. For example, an environmental consultant may operate with a warranty to their client so that if the consultant misses a feature during a ground investigation that is material to the development of the site, they become liable for its remediation. A drilling contractor may want to have assurance that there are no obstructions or Unexploded Ordnance (UXO) at the location of the proposed borehole. Sites may be known to have natural voids or man-made cavities (cellars, basements) that, if not located, could represent a significant hazard to vehicles or pedestrians passing over them, with the risk that someone could be killed or seriously injured. Geophysical methods can locate live underground electricity cables effectively. Failure to identify the location of such a target could result in electrocution and death of a worker involved in excavation, and damage to such a cable.

## 1.2 Geophysical methods

Geophysical methods respond to the physical properties of the subsurface media (rocks, sediments, water, voids, etc.) and can be classified into two distinct types. *Passive* methods are those that detect variations within the natural fields associated with the Earth, such as the gravitational and magnetic fields. In contrast are the *active* methods, such as those used in exploration seismology, in which artificially generated signals are transmitted into the ground, which then modifies those signals in ways that are characteristic of the materials through which they travel. The altered signals are measured by appropriate detectors whose output can be displayed and ultimately interpreted.

Applied geophysics provides a wide range of very useful and powerful tools which, when used correctly and in the right situations, will produce useful information. All tools, if misused or abused, will not work effectively. One of the aims of this book is to try to explain how applied geophysical methods can be employed appropriately,

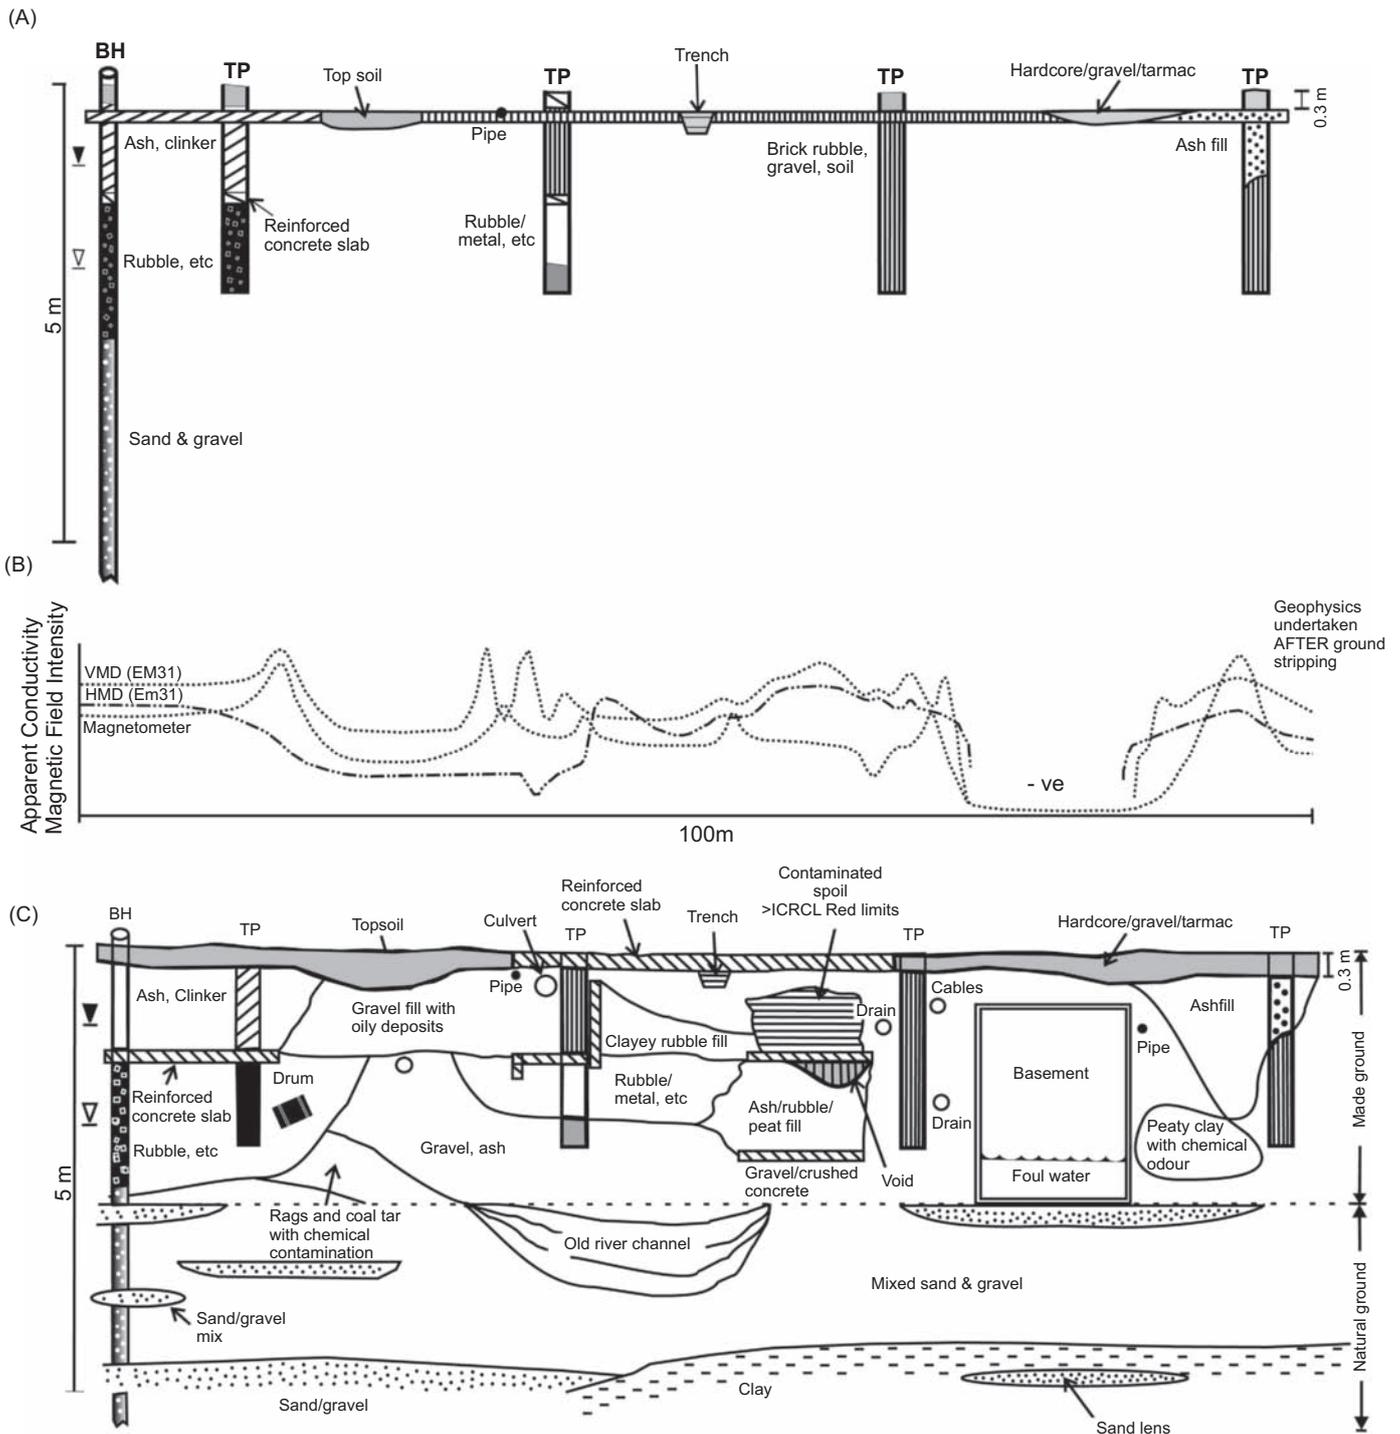

**Figure 1.2** Ground models derived from (A) an intrusive investigation only, (B) a combined profile from a comprehensive geophysical survey, and (C) final interpretation of a subsequent intrusive investigation targeted on the geophysical anomalies. [C]

and to highlight the advantages and disadvantages of the various techniques.

Geophysical methods may form part of a larger survey, and thus geophysicists should always try to interpret their data and communicate their results clearly to the benefit of the whole survey team and particularly to the client. An engineering site investigation, for

instance, may require the use of seismic refraction to determine how easy it would be to excavate the ground (i.e. the 'rippability' of the ground). If the geophysicist produces results that are solely in terms of seismic velocity variations, the engineer is still none the wiser. The geophysicist needs to translate the velocity data into a rippability index with which the engineer would be familiar.

Few, if any, geophysical methods provide a *unique* solution to a particular geological situation. It is possible to obtain a very large number of geophysical solutions to some problems, some of which may be geologically nonsensical. It is necessary, therefore, always to ask the question: 'Is the geophysical model geologically plausible?' If it is not, then the geophysical model has to be rejected and a new one developed which does provide a reasonable geological solution. Conversely, if the geological model proves to be inconsistent with the geophysical interpretation, then it may require the geological information to be re-evaluated.

It is of paramount importance that geophysical data are interpreted within a physically constrained or geological framework.

### 1.3 Matching geophysical methods to applications

The various geophysical methods rely on different physical properties, and it is important that the appropriate technique be used for a given type of application.

For example, gravity methods are sensitive to density contrasts within the subsurface geology and so are ideal for exploring major sedimentary basins where there is a large density contrast between the lighter sediments and the denser underlying rocks. It would be quite inappropriate to try to use gravity methods to search for localised near-surface sources of groundwater where there is a negligible density contrast between the saturated and unsaturated rocks. It is even better to use methods that are sensitive to different physical properties and are able to complement each other and thereby provide an integrated approach to a geological problem. Gravity and magnetic methods are frequently used in this way.

Case histories for each geophysical method are given in each chapter, along with some examples of integrated applications where appropriate. The basic geophysical methods are listed in Table 1.2 with the physical properties to which they relate and their main uses. Table 1.2 should only be used as a guide. More specific information about the applications of the various techniques is given in the appropriate chapters.

Some methods are obviously unsuitable for some applications but novel uses may yet be found for them. One example is that of ground radar being employed by police in forensic work (see Chapter 12 for more details). If the physical principles upon which a method is based are understood, then it is less likely that the technique will be misapplied or the resultant data misinterpreted. This makes for much better science.

Furthermore, it must also be appreciated that the application of geophysical methods will not necessarily produce a unique geological solution. For a given geophysical anomaly there may be many possible solutions each of which is equally valid geophysically, but which may make geological nonsense. This has been demonstrated very clearly in respect of a geomagnetic anomaly over Lausanne in Switzerland (Figure 1.3). While the model with the form of a question-mark satisfies a statistical fit to the observed data, the model is clearly and quite deliberately geological nonsense in order

to demonstrate the point. However, geophysical observations can also place stringent restrictions on the interpretation of geological models. While the importance of understanding the basic principles cannot be over-emphasised, it is also necessary to consider other factors that affect the quality and usefulness of any geophysical survey, or for that matter of any type of survey whether it is geophysical, geochemical or geotechnical. This is done in the following few sections.

## 1.4 Planning a geophysical survey

### 1.4.1 General philosophy

Any geophysical survey tries to determine the nature of the subsurface, but it is of paramount importance that the prime objective of the survey be clear right at the beginning. The constraints on a commercial survey will have emphases different from those on an academic research investigation and, in many cases, there may be no ideal method. The techniques employed and the subsequent interpretation of the resultant data tend to be compromises, practically and scientifically.

There is no short-cut to developing a good survey style; only by careful survey planning, backed by a sound knowledge of the geophysical methods and their operating principles, can cost-effective and efficient surveys be undertaken within the prevalent constraints. However, there have been only a few published guidelines: British Standards Institute BS 5930 (1981), Hawkins (1986), Geological Society Engineering Group Working Party Report on Engineering Geophysics (1988), and most recently, their revised report published in 2002 (McDowell *et al.*, 2002), although see a review of this publication by Reynolds (2004b). Scant attention has been paid to survey design, yet a badly thought-out survey rarely produces worthwhile results. Indeed, Darracott and McCann (1986: p. 85) said that:

*dissatisfied clients have frequently voiced their disappointment with geophysics as a site investigation method. However, close scrutiny of almost all such cases will show that the geophysical survey produced poor results for one or a combination of the following reasons: inadequate and/or bad planning of the survey, incorrect choice or specification of technique, and insufficiently experienced personnel conducting the investigation.*

It is important that geophysicists maintain a sense of realism when marketing geophysical methods, if expectations are to be matched by actual outcomes. Geophysical contractors tend to spend the vast majority of their time on data acquisition and a minimal amount of time on interpretation and reporting. It is hoped that this chapter will provide at least a few pointers to help construct cost-effective and technically sound geophysical field programmes.

### 1.4.2 Planning strategy

Every survey must be planned according to some strategy, or else it will become an uncoordinated muddle. *The mere acquisition of data does not guarantee the success of the survey.* Knowledge (by way of

**Table 1.2** Geophysical methods and their main applications

Geophysical method	Chapter number	Dependent physical property	Applications (see key below)												
			1	2	3	4	5	6	7	8	9	10	11	12	
Gravity	2	Density	P	P	s	s	s	s	s	x	x	s	x	x	x
Magnetic	3	Susceptibility	P	P	P	P	x	m	x	P	P	x	x	P	
Seismic refraction	4, 5	Elastic moduli; density	P	P	m	s	s	s	x	x	x	x	x	x	
Seismic reflection	4, 6	Elastic moduli; density	P	P	m	s	s	m	x	x	x	x	x	x	
Resistivity	7	Resistivity	m	m	P	P	P	P	P	s	P	P	m	x	
Spontaneous potential	8	Potential differences	x	x	P	m	P	m	m	m	x	P	x	x	
Induced polarisation	9	Resistivity; capacitance	m	m	P	m	s	m	m	m	m	P	m	x	
Electro-Magnetic (EM)	10, 11	Conductance; inductance	s	P	P	P	P	P	P	P	P	m	m	P	
EM - VLF	12	Conductance; inductance	m	m	P	m	s	s	s	m	m	x	x	x	
EM - GPR	13, 14	Permittivity; conductivity	x	x	m	P	P	P	s	P	P	m	P	s	
Magneto-telluric	12	Resistivity	s	P	P	m	m	x	x	x	x	x	x	x	
Magnetic Resonance Sounding (MRS)	12	Magnetic moment; porosity	x	x	x	x	P	x	m	x	x	x	x	x	
Radiometrics	15	$\gamma$ -radioactivity	s	s	P	s	x	x	x	x	x	x	x	x	

P = primary method; s = secondary method; m = may be used but not necessarily the best approach, or has not been developed for this application; x = unsuitable

**Applications**

- 1 Hydrocarbon exploration (coal, gas, oil)
- 2 Regional geological studies (over areas of 100s of km<sup>2</sup>)
- 3 Exploration/development of mineral deposits
- 4 Engineering/environmental site investigation
- 5 Hydrogeological investigations
- 6 Detection of subsurface cavities
- 7 Mapping of leachate and contaminant plumes
- 8 Location and definition of buried metallic objects
- 9 Archaeogeophysics
- 10 Biogeophysics
- 11 Forensic geophysics
- 12 Unexploded Ordnance (UXO) detection


masses of data) does not automatically increase our *understanding* of a site; it is the latter we are seeking, and knowledge is the means to this.

One less-than-ideal approach is the ‘blunderbuss’ approach – take along a sufficient number of different methods and try them all out (usually inadequately, owing to insufficient testing time per technique) to see which ones produce something interesting. Whichever method yields an anomaly, then use that technique. This is a crude statistical approach, such that if enough techniques are tried then at least one must work! This is hardly scientific or cost-effective.

The success of geophysical methods can be very site-specific and *scientifically-designed* trials of adequate duration may be very worthwhile to provide confidence that the techniques chosen will work at a given location, or that the survey design needs modifying in order to optimise the main survey. It is in the interests of the client

that suitably experienced geophysicists are employed for the vital survey design, site supervision and final reporting. Indeed, the latest guidelines (McDowell *et al.*, 2002) extol the virtues of employing what is being called in the UK an *Engineering Geophysics Advisor* (EGA). Some of the benefits of employing an Engineering Geophysics Advisor are:

- The survey design is undertaken objectively;
- The appropriate geophysical contractor(s) is/are selected on the basis of their capability and expertise, not on just what kit they have available at the time;
- The contractor is supervised in the field (to monitor data quality, survey layout, deal with issues on site, gather additional information to aid the interpretation);

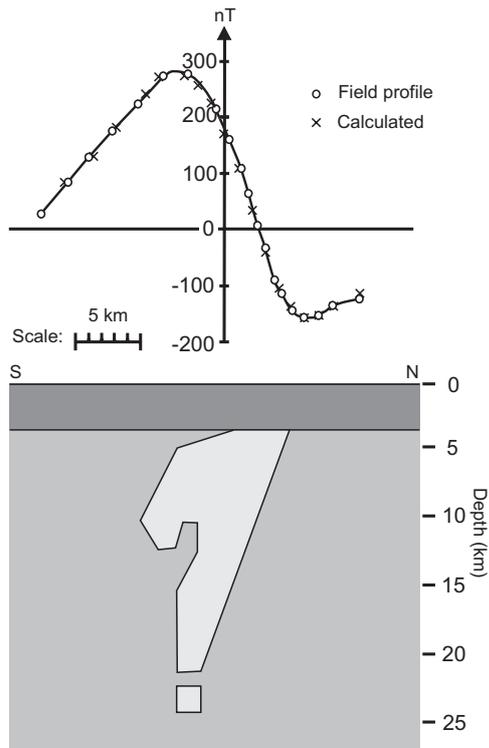


**Figure 1.3** A magnetic anomaly over Lausanne, Switzerland, with a hypothetical and unreal model for which the computed anomaly still fits the observed data. After Meyer de Stadelhofen and Juillard (1987).

- The contractor's factual report is reviewed objectively;
- The field data and any processed data from the contractor are scrutinised prior to further analysis and modelling;
- The analysis, modelling, and interpretation can be undertaken by specialists who have the time and budget to do so, to extract the necessary information to meet the survey objectives for the Client;
- The analysis can incorporate additional information (geological, historical, environmental, engineering, etc.) and integrate it to produce a more holistic interpretation and more robust recommendations for the Client.

So what are the constraints that need to be considered by both clients and geophysical survey designers? An outline plan of the various stages in designing a survey is given in Figure 1.4. The remainder of this chapter discusses the relationships between the various components.

### 1.4.3 Survey constraints

The first and most important factor is that of *finance*. How much is the survey going to cost and how much money is available? The cost will depend on where the survey is to take place, how accessible

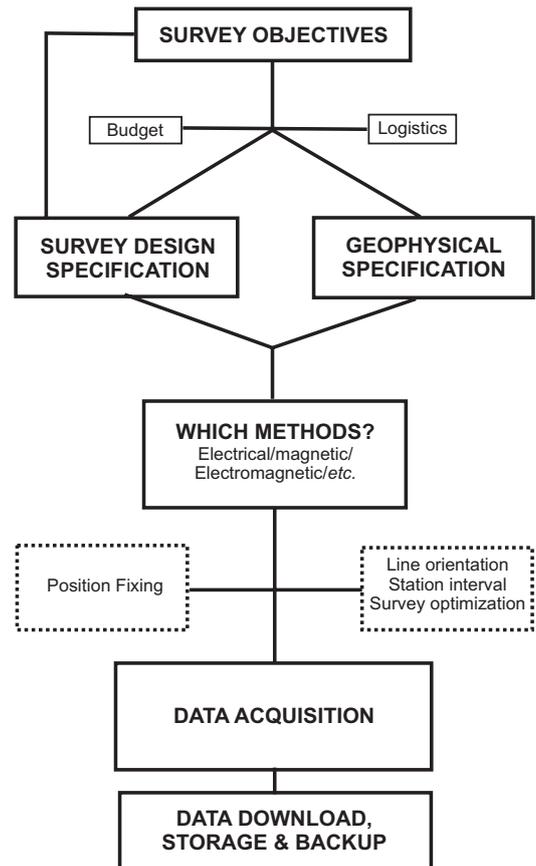

**Figure 1.4** Schematic flow diagram to illustrate the decision-making leading to the selection of geophysical and utility software. After Reynolds (1991a).

the proposed field site is, and on what scale the survey is to operate. An airborne regional survey is a very different proposition to, say, a local, small-scale ground-based investigation. The more complex the survey in terms of equipment and logistics, the greater the cost is likely to be.

It is important to remember that the geophysics component of a survey is usually only a small part of an exploration programme and thus the costs of the geophysics should be viewed in relation to those of the whole project. Indeed, the judicious use of geophysics can save large amounts of money by enabling the effective use of resources (Reynolds, 1987a). For example, a reconnaissance survey can identify smaller areas where much more detailed investigations ought to be undertaken, thus removing the need to do saturation surveying. The factors that influence the various components of a budget also vary from country to country, and from job to job, and there is no magic formula to guarantee success.

Some of the basic elements of a survey budget are given in Table 1.3. This list is not exhaustive but serves to highlight the most common elements of a typical budget. Liability insurance is especially important if survey work is being carried out as a service to others. If there is any cause for complaint, then this may manifest itself in legal action (Sherrell, 1987).

**Table 1.3** Basic elements of a survey budget.

Staffing	Management, technical, support, administration, etc.
Operating costs	Including logistics
Cashflow	Assets versus useable cash
Equipment	For data acquisition and/or data reduction/analysis – computers and software; whether or not to hire, lease or buy
Insurances	To include public, employer's and professional indemnity insurances, as appropriate
Overheads	Administration; consumables; etc.
Development costs	Skills, software, etc.
Contingencies	Something is bound to go wrong at some time, usually when it is most inconvenient

It may seem obvious to identify *logistics* as a constraint, but there have been far too many surveys ruined by a lack of even the most basic needs of a survey. It is easy to think of the main people to be involved in a survey – i.e. geologists, geophysicists, surveyors – but there are many more tasks to be done to allow the technical staff the opportunity to concentrate on the tasks in hand. Vehicles and equipment will need maintaining, so skilled technicians and mechanics may be required. Everybody has to eat, and it is surprising how much better people work when they are provided with well-prepared food: a good cook at base camp can be a real asset. Due consideration should be paid to health and safety, and any survey team should have staff trained in first aid. Admittedly it is possible for one person to be responsible for more than one task, but on large surveys this can prove to be a false economy. Apart from the skilled and technical staff, local labour may be needed as porters, labourers, guides, translators, additional field assistants, or even as armed guards!

It is all too easy to forget what field conditions can be like in remote and inaccessible places. It is thus important to remember that in the case of many countries, access in the dry season may be possible, whereas during the rains of the wet season, the so-called roads (which often are dry river beds) may be totally impassable. Similarly, access to land for survey work can be severely hampered during the growing season with some crops reaching 2–3 metres high and consequently making position fixing and physical access extremely difficult. There is then the added complication that some surveys, such as seismic refraction and reflection, may cause a limited amount of damage for which financial compensation may be sought. In some cases, claims may be made even when no damage has been caused! If year-round access is necessary, the provision of all-terrain vehicles and/or helicopters may prove to be the only option, and these are never cheap to operate.

Where equipment has to be transported, consideration has to be given not only to its overall weight but to the size of each container.

It can prove an expensive mistake to find that the main piece of equipment will not pass through the doorway of a helicopter so that alternative overland transport has to be provided at very short notice; or to find that many extra hours of flying time are necessary to airlift all the equipment. It may even be necessary to make provision for a bulldozer to excavate a rough road to provide access for vehicles. If this is accounted for inadequately in the initial budgeting, the whole success of the survey can be jeopardised. Indeed, the biggest constraint in some developing countries, for example, is whether the equipment can be carried by a porter or will fit on the back of a pack-horse or yak.

Other constraints that are rarely considered are those associated with *politics, society and religion*. Let us take these in turn.

*Political constraints* This can mean gaining permission from land-owners and tenants for access to land, and liaison with clients (which often requires great diplomacy). The compatibility of staff to work well together also needs to be considered, especially when working in areas where there may be conflicts between different factions of the local population, such as tribal disputes or party political disagreements. It is important to remember to seek permission from the appropriate authority to undertake geophysical fieldwork. For example, in the UK it is necessary to liaise with the police and local government departments if survey work along a major road is being considered, so as to avoid problems with traffic jams. In other cases it may be necessary to have permission from a local council, or in the case of marine surveys, from the local harbour master so that appropriate marine notices can be issued to safeguard other shipping. All these must be found out well before the start of any fieldwork. Delays cost money!

*Social constraints* For a survey to be successful it is always best to keep on good terms with the local people. Treating other people with respect will always bring dividends (eventually). Each survey should be socially and environmentally acceptable and not cause a nuisance. An example is in not choosing to use explosives as a seismic source for reflection profiling through urban areas or at night. Instead, the seismic vibrator technique should be used (see Chapter 4). Similarly, an explosive source for marine reflection profiling would be inappropriate in an area associated with a lucrative fishing industry because of possibly unacceptably high fish-kill. In designing the geophysical survey, the question must be asked: 'Is the survey technique socially and environmentally acceptable?'


*Religious constraints* The survey should take into account local social customs which are often linked with religion. In some Muslim countries, for example, it is common in rural areas for women to be the principal water-collectors. It is considered inappropriate for the women to have to walk too far away from the seclusion of their homes. Thus there is no point in surveying for groundwater for a tubewell several kilometres from the village (Reynolds, 1987a). In addition, when budgeting for the provision of local workers, it is best to allow for their 'Sabbath'. Muslims like to go to their mosques on Friday afternoons and are thus unavailable for work then. Similarly, Christian workers tend not to like being asked to work on Sundays, or Jews on Saturdays, and so on. Religious traditions must be respected to avoid difficulties.

## 1.5 Geophysical survey design

### 1.5.1 Target identification

Geophysical methods locate boundaries across which there is a marked contrast in physical properties. Such a contrast can be detected remotely because it gives rise to a *geophysical anomaly* (Figure 1.5) which indicates variations in physical properties relative to some background value (Figure 1.6). The physical source of each anomaly is termed the *geophysical target*. Some examples of targets are trap structures for oil and gas, mineshafts, pipelines, ore lodes, cavities, groundwater, buried rock valleys, and so on.

In designing a geophysical survey, the type of target is of great importance. Each type of target will dictate to a large extent the appropriate geophysical method(s) to be used, and this is where an

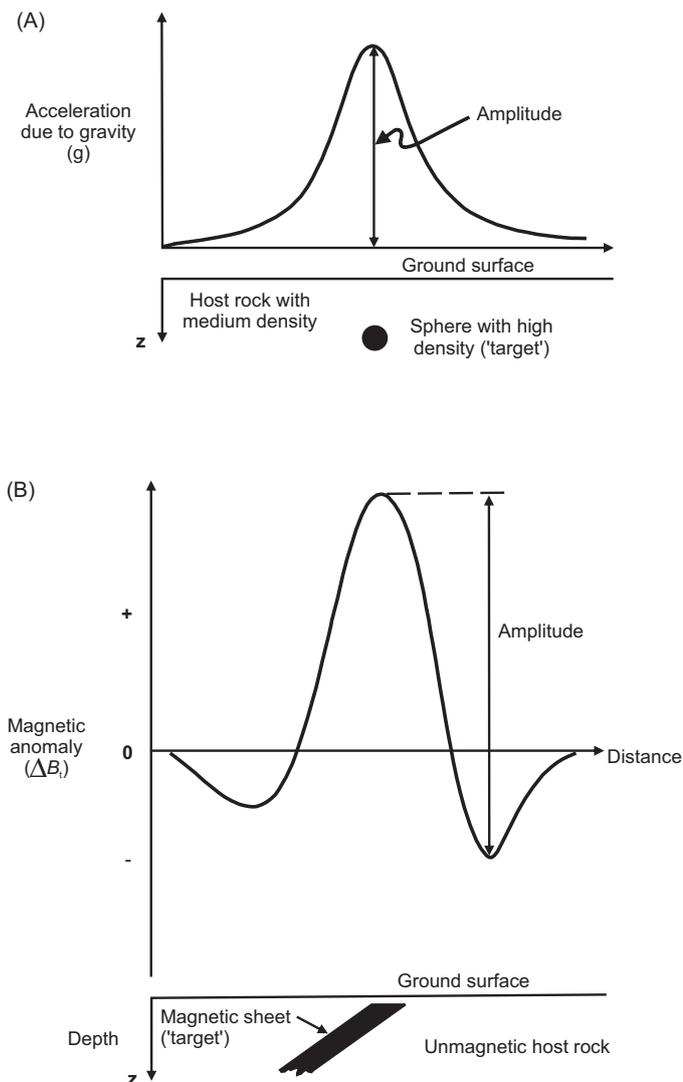

**Figure 1.5** Examples of (A) a gravity anomaly over a buried sphere, and (B) a magnetic anomaly over an inclined magnetic sheet. For further details of gravity and magnetic methods, see Chapters 2 and 3 respectively.

understanding of the basic geophysical principles is important. The physical properties associated with the geophysical target are best detected by the method(s) most sensitive to those same properties.

Consider the situation where saline water intrudes into a near-surface aquifer; saline water has a high conductivity (low resistivity) in comparison with fresh water and so is best detected using electrical resistivity or electromagnetic conductivity methods; gravity methods would be inappropriate because there would be virtually no density contrast between the saline and fresh water. Similarly, seismic methods would not work as there is no significant difference in seismic wave velocities between the two saturated zones. Table 1.1 provides a ready means of selecting an appropriate technique for the major applications.


Although the physical characteristics of the target are important, so are its shape and size. In the case of a metallic ore lode, a mining company might need to know its lateral and vertical extent. An examination of the amplitude of the anomaly (i.e. its maximum peak-to-peak value) and its shape may provide further information about where the target is below ground and how big it is.

### 1.5.2 Optimum line configuration and survey dimensions


So far only the types of geological target and the selection of the most appropriate geophysical methods have been discussed. In order to complete a technically competent survey several other factors need to be given very careful thought. How are the data to be collected in order to define the geophysical anomaly? Two concepts need to be introduced, namely *profiling* and *mapping*.

Profiling is a means of measuring the variation in a physical parameter along the surface of a two-dimensional cross-section (Figure 1.7A). Consideration needs to be given to the correct orientation and length of the profile (see below). Data values from a series of parallel lines or from a grid can be contoured to produce a *map* (Figure 1.7B) on which all points of equal value are joined by *isolines* (equivalent to contours on a topographic map). However, great care has to be taken over the methods of contouring or else the resultant map can be misleading (see Section 1.5.3). There are many other ways of displaying geophysical data (Figure 1.7C), especially if computer graphics are used (e.g. shaded relief maps as in Figure 1.7D), and examples are given throughout the book.

The best orientation of a profile is normally at right-angles to the strike of the target. A provisional indication of geological strike may be obtained from existing geological maps and mining records. However, in many cases, strike direction may not be known at all and test lines may be necessary to determine strike direction prior to the main survey. The length of the profile should be greater than the width of the expected geophysical anomaly. If it is not, then it may be impossible to define a background value to determine the true anomaly amplitude and the value of the survey would be reduced greatly. The choice of line orientation also has to take into account sources of noise (see Section 1.5.4). If a map is required then it is advisable to carry out 'tie-lines' (cross-cutting profiles), the intersections (*nodes*) of which should have identical values. If the data are not the same at the nodes then the values need to be

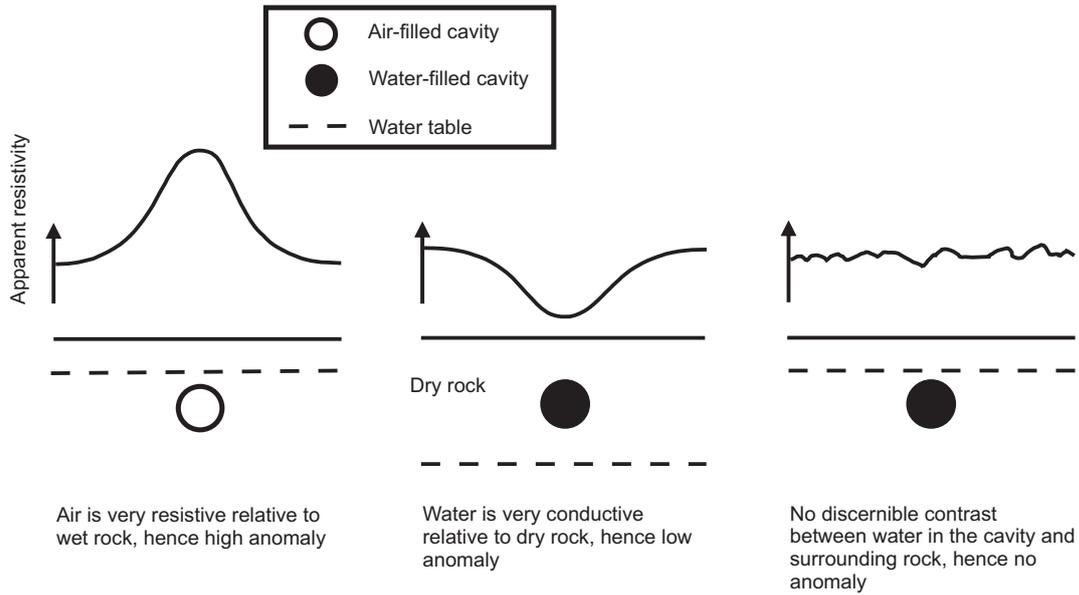

**Figure 1.6** Contrasts in physical properties from different geological targets give rise to a target. When there is no contrast, the target is undetectable geophysically. [C]

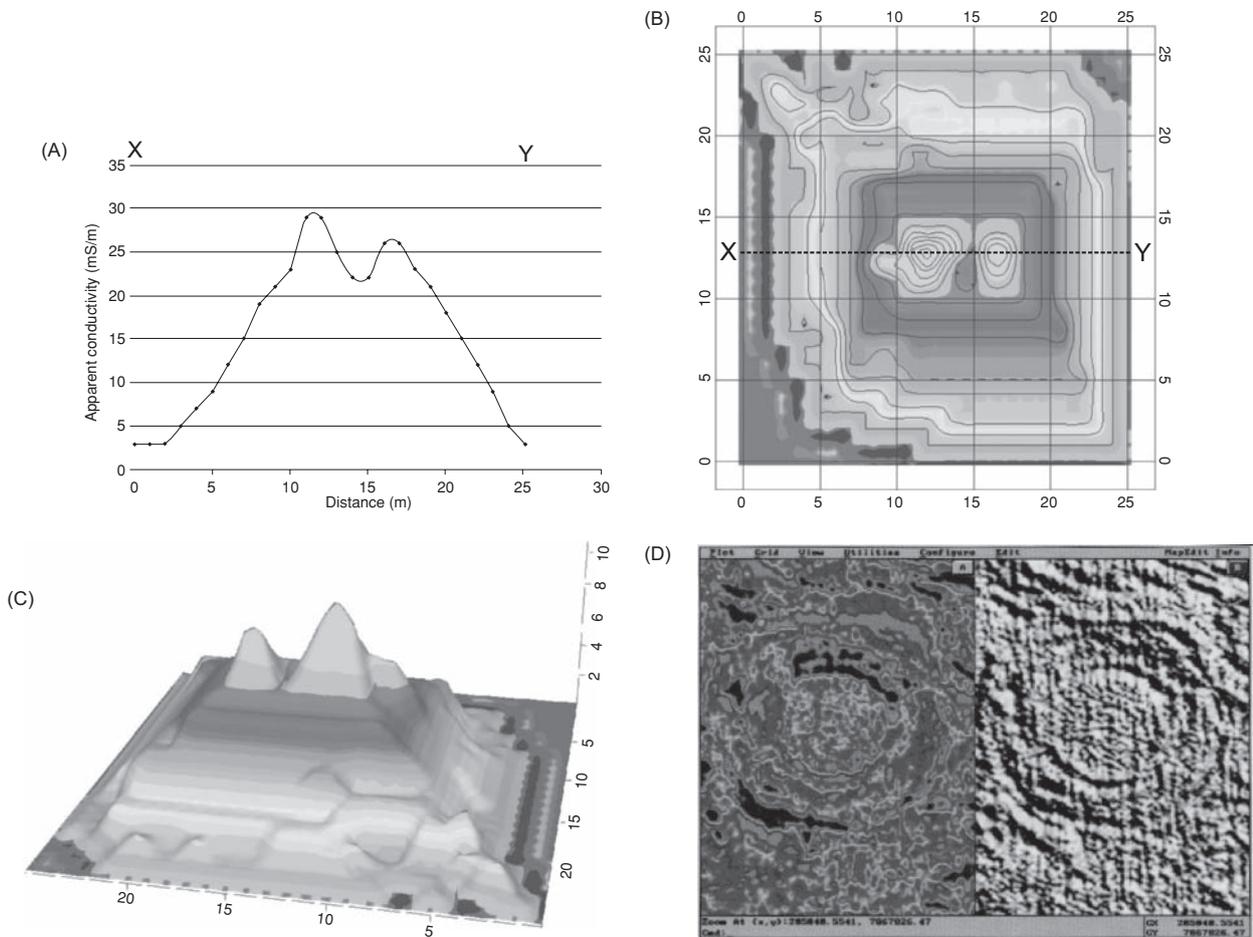

**Figure 1.7** Geophysical anomaly plots: (A) profile, (B) map, and (C) isometric projection. All three plots are from the same set of electromagnetic ground-conductivity data (see Chapter 11). (D) A shaded relief/grey-scale shadow display can enhance features that otherwise would be hard to visualise - in this case the display is of magnetic data over an area in which faulting appears as a series of features that possibly may be part of a meteorite impact crater. Photo courtesy of Geosoft Europe Ltd. [C]

checked in case there has been a simple misprint in data entry, or there might have been an error in fixing position or in instrumental calibration. When such data are compared, make sure all necessary data corrections have been made (see the individual chapters for details and examples) so that like is compared with like. Nodal values are vital for data quality control.


Geophysical investigations can take the form of four types of dimensional survey to investigate the spatial ( $x, y, z$ ) and temporal ( $t$ ) variations in the geophysical properties of the subsurface. A one-dimensional (1D) *sounding* at a specific location yields information as a function of depth ( $z$ ), such as with the Vertical Electrical Sounding method (see Chapter 7, section 7.4.1). Profiling (2D) along a given ( $x$  or  $y$ ) transect as illustrated in Figure 1.7A indicates variations in geophysical properties with depth ( $z$ ). When a series of parallel 2D ( $x, z$ ) profiles is surveyed, the results may be gridded and interpolated in the  $y$ -direction to present the data in map and/or isometric projection form (as shown in Figures 1.7B and 1.7C) or as a data volume. While the results may look three-dimensional, they should be referred to as *2.5 dimensional*, or *pseudo-3D*. True 3D spatial surveys take the form of a geophysical source that transmits a signal that is detected after passing through the subsurface to a *grid* rather than a *line* of sensors laid out on the ground surface, for example. When time-lapse surveys are undertaken, this can be referred to as providing an additional (time,  $T$ ) dimension to the survey, so that a 4D survey would comprise a true 3D ( $x, y, z$ ) spatial survey repeated over the same sensor layout after a period of time ( $t$ ). Similarly, 2D surveys repeated as time lapse investigations, such as in monitoring remediation of ground contamination, could also be referred to as being 3D ( $x, z, t$ ), but this would cause confusion with a 3D ( $x, y, z$ ) spatial survey. To differentiate between them a 2D time lapse survey can be referred to as a 2D-T survey, rather than 3D. A repeated time-lapse sounding ( $z, t$ ) can be referred to as a 1D-T survey to differentiate it from a 2D ( $x, z$ ) spatial survey.

### 1.5.3 Selection of station intervals

The point at which a discrete geophysical measurement is made is called a *station* and the distances between successive measurements are *station intervals*.

It is fundamental to the success of a survey that the correct choice of station intervals be made. It is a waste of time and money to record too many data and equally wasteful if too few are collected. So how is a reasonable choice to be made? This requires some idea of the nature and size of the geological target. Any geophysical anomaly found will always be larger than the feature causing it. Thus, to find a mineshaft, for example, with a diameter of, say, 2 m, an anomaly with a width of at least twice this might be expected. Therefore, it is necessary to choose a station interval that is sufficiently small to be able to resolve the anomaly, yet not too small as to take far too long to be practicable.


Reconnaissance surveys tend to have coarser station intervals in order to cover a large area quickly, and to indicate zones over which a more detailed survey should be conducted with a reduced station interval and a more closely spaced set of profiles.

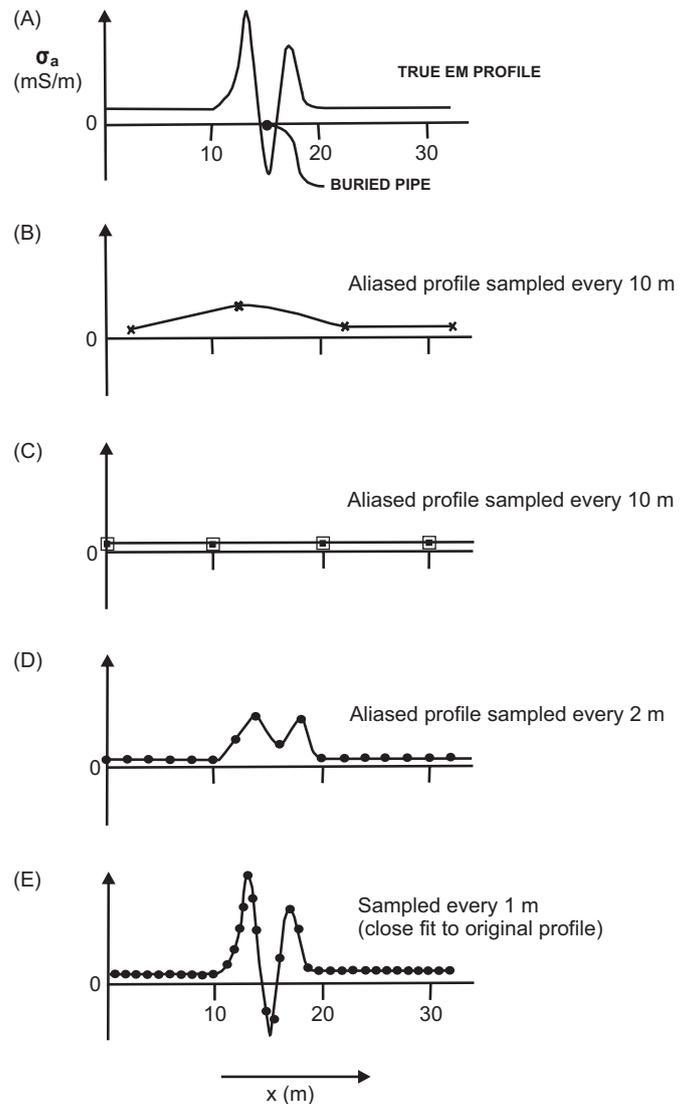

**Figure 1.8** Examples of various degrees of spatial aliasing using different sampling intervals. (A) shows a continuously sampled profile. (B) and (C) show sampling every 10 m, but at different points along the profile. (D) shows sampling every 2 m: the profile is still aliased. (E) shows sampling every 1 m: this profile is the closest to that in (A).

Consider Figure 1.8A in which a typical electromagnetic anomaly for a buried gas pipe is shown. The whole anomaly is 8 m wide. If a 10 m sampling interval is chosen, then it is possible either to clip the anomaly, as in Figure 1.8B, or to miss it entirely (Figure 1.8C). The resultant profiles with 2 m and 1 m sampling intervals are shown in Figures 1.8D and 1.8E respectively. The smaller the sampling interval, the better the approximation is to the actual anomaly (compare with Figure 1.8B or C). The loss of high-frequency information, as in Figures 1.8B and C, is a phenomenon known as *spatial aliasing* and should be avoided.

Another form of spatial aliasing may occur when gridded data are contoured, particularly by computer software. If the grid network is too coarse, higher-frequency information may be smeared

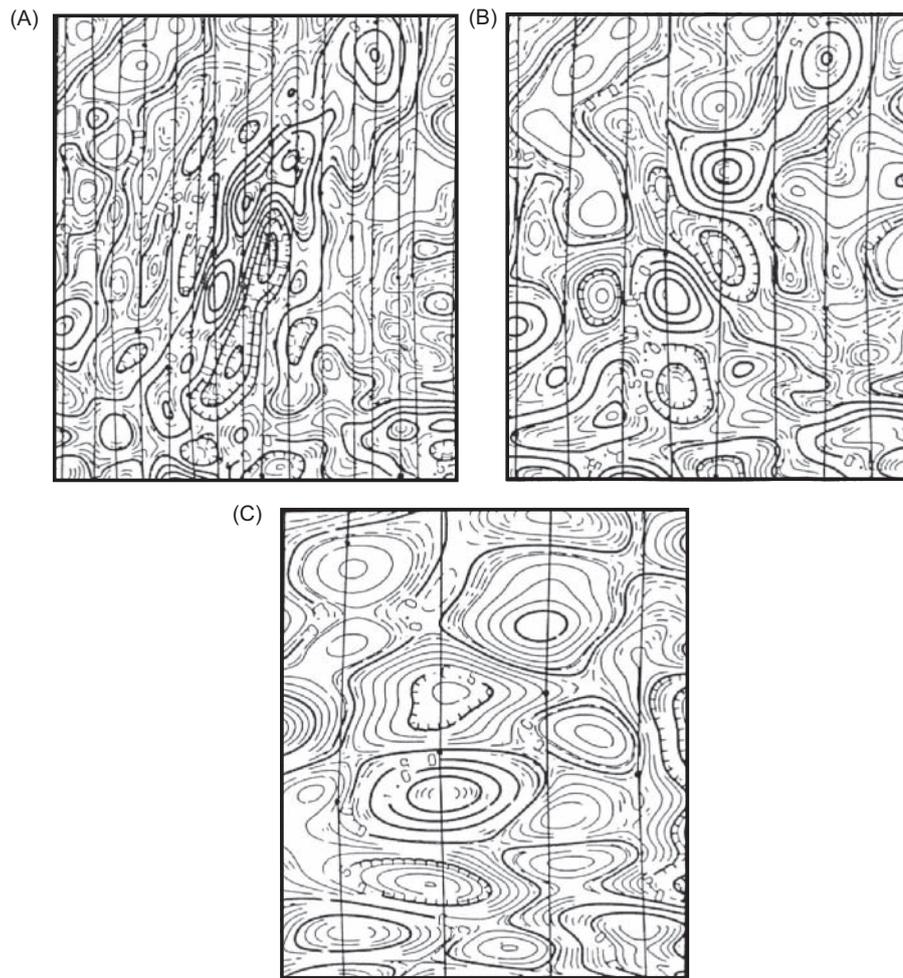

**Figure 1.9** Example of spatial aliasing on aeromagnetic data, showing the loss of higher-frequency anomalies, increasing separation between flight lines and the increased ‘bullseye’ effect caused by stretching the data too far. From Hood *et al.* (1979), by permission.


artificially and appear as lower-frequency anomalies. A common characteristic of spatially aliased gridded data is the ‘bullseye’ effect (see Figure 1.9) where the contouring program has had too little information to work on and so has contoured around individual data points or has linked data together unjustifiably (Cameron *et al.*, 1976; Hood *et al.*, 1979; Reid, 1980; Wu, 1990). This kind of problem can be created by an inadequately detailed or inappropriately designed field programme.

Figure 1.9 shows a hypothetical aeromagnetic survey. The map in Figure 1.9A was compiled from contouring the original data at a line spacing of 150 m. Figures 1.9B and C were recontoured with line spacings of 300 m and 600 m respectively. The difference between the three maps is very marked, with a significant loss of information between Figures 1.9A and C. Noticeably the higher-frequency anomalies have been aliased out, leaving only the longer-wavelength (lower-frequency) features. In addition, the orientation of the major anomalies has been distorted by the crude contouring in Figure 1.9C.

Spatial stretching occurs on datasets acquired along survey lines separated too widely with respect to along-line sampling. This spa-

tial aliasing can be removed or reduced using mathematical functions, such as the Radon Transform (Yuanxuan, 1993). This method provides a means of developing a better gridding scheme for profile line-based surveys. The specific details of the method are beyond the scope of this chapter, and readers are referred to Yuanxuan’s paper for more information. Further advice about the effects of different gridding routines is available from the relevant software providers either through their manuals, software ‘help’ keys or online via the Internet. Do not just use the default settings and hope for the best!

Similar aliasing problems associated with contouring can arise from radial survey lines and/or too few data points, as exemplified by Figure 1.10. Figure 1.10A and B both have 64 data points over the same area, and two effects can be seen very clearly: in Figure 1.10A the orientation of the contours (one marked 47,500 nT) artificially follows that of the line of data points to the top left-hand corner, whereas the orientation is more north–south in Figure 1.10B. The even grid in Figure 1.10B highlights the second effect (even more pronounced in Figure 1.10C), which is the formation of bullseyes around individual data points. The inadequacy of the number of data points is further demonstrated in Figure 1.10C, which is based

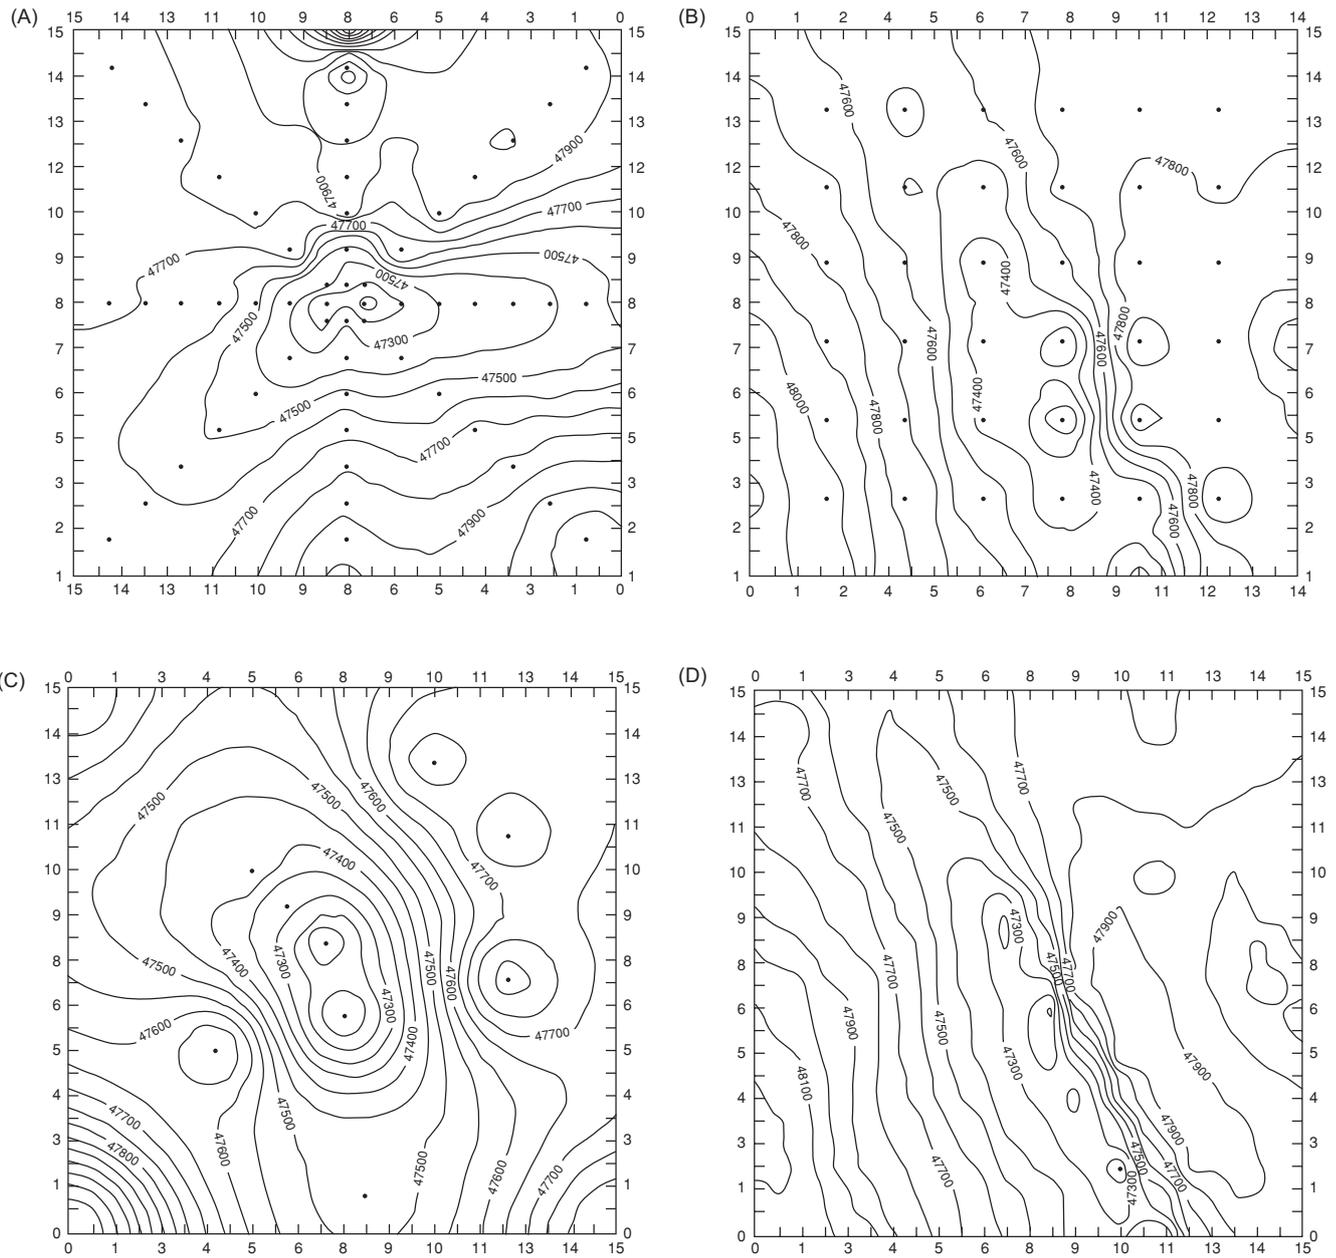

**Figure 1.10** Examples of contouring different patterns of data. (A) shows set of radial lines, and (B) an even grid of data, both with 114 points per square kilometre. (C) has too few data points unevenly spread over the same area (23 data points per square kilometre). (D) shows an even grid of 453 points per square kilometre. The contours are isolines of total magnetic field strength (units: nanoteslas); the data are from a ground magnetometer investigation of northwest Dartmoor, England.

on only 13 data values, by the formation of concentric contours that are artificially rounded in the top left and both bottom corners. For comparison, Figure 1.10D has been compiled on the basis of 255 data points, and exposes the observed anomalies much more realistically.

### 1.5.4 Noise

When a field survey is being designed it is important to consider what extraneous data (*noise*) may be recorded. There are various

sources of noise, ranging from man-made sources ('cultural noise') as diverse as electric cables, vehicles, pipes and drains, to natural sources of noise such as wind and rain, waves, and electrical and magnetic storms (Figure 1.11).

Some aeromagnetic and electrical methods can suffer badly from cathodic currents that are used to reduce corrosion in metal pipes (Gay, 1986). Electrical resistivity surveys should not be conducted close to or parallel to such pipes, nor parallel to cables, since power lines will induce unwanted voltages in the survey wires. Before a survey starts, it is always advisable to consult with public utility

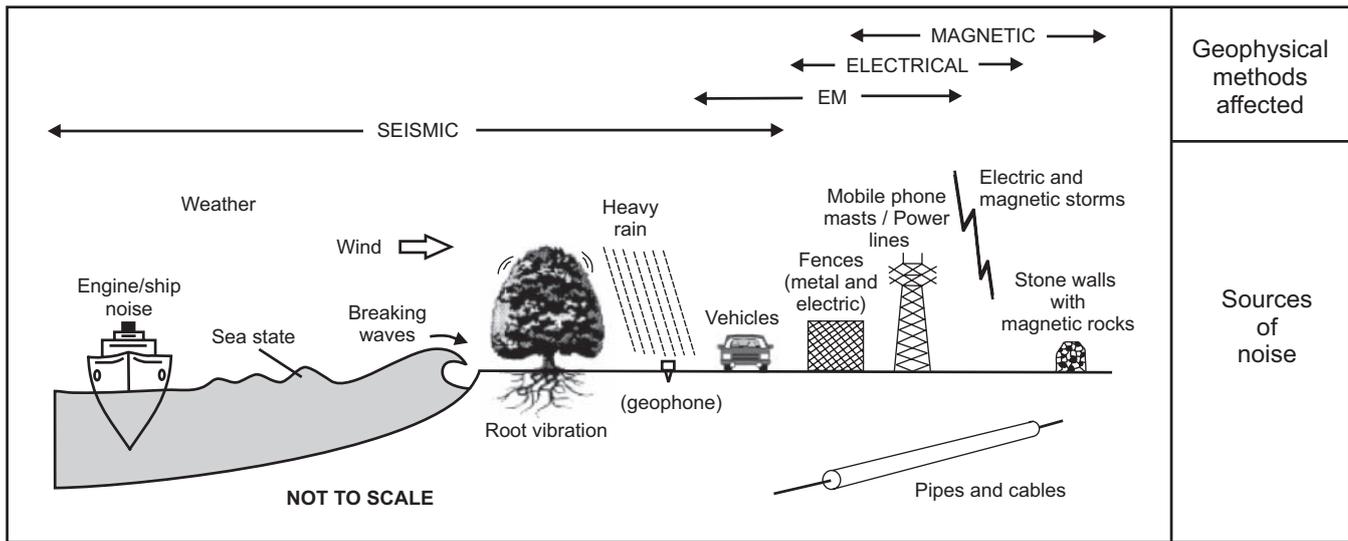


Figure 1.11 Schematic illustrating some common sources of geophysical noise.

companies which should, given enough time, provide maps of their underground and overhead facilities. It is important to check on the location of water mains, sewers, gas pipes, electricity cables, telephone cables and cable-television wires. In many cases such utilities may mask any anomalies caused by deeper-seated natural bodies. Furthermore, should direct excavation be required, the utilities underground may be damaged if their locations are not known.

It is also worth checking on the type of fencing around the survey area. Wire mesh and barbed wire fences, and metal sheds, can play havoc with electromagnetic and magnetic surveys and will restrict the area over which sensible results can be obtained. It also pays to watch out for types of walling around fields, as in many areas wire fences may be concealed by years of growth of the local vegetation. In addition, when undertaking a magnetic survey, be on the lookout for stone walls built of basic igneous rocks, as these can give a noticeable magnetic anomaly.

There are two forms of noise (Figure 1.12). *Coherent noise*, such as that produced by power lines, occurs systematically (Figure 1.12A) and may degrade or even swamp the wanted signals. As coherent noise usually occurs with a definable frequency (e.g. mains electricity at 50–60 Hz), appropriate filters can be used to remove or reduce it.

In contrast, *incoherent noise*, such as that due to waves breaking on a seashore or to traffic, is random. When summed together it tends to cancel to some extent, so reducing its overall effect (Figure 1.12B).

High but incoherent noise levels are often associated with surveys along road verges. Metal-bodied vehicles passing by during an electromagnetic survey can cause massive but brief disturbances. Vehicles, particularly heavy lorries, and trains can set up short-lived but excessive acoustic noise which can ruin a seismic survey. So, too, can the effects of waves washing onto beaches or the noise of turbulent river water close to geophone spreads on a seismic survey. In exposed areas, geophones that have not been planted properly may pick up wind vibration acting on the geophones themselves and on the connecting cable, but also from trees blowing in the

breeze, as the motion transmits vibrations into the ground via their root systems. Similar effects can be observed close to man-made structures. Unprotected geophones are very sensitive to the impact of raindrops, which can lead to the curtailment of a seismic survey during heavy rain.

Cultural and unnecessary natural noise can often be avoided or reduced significantly by careful survey design. Increasingly, modern technology can help to increase the *signal-to-noise ratio* so that, even when there is a degree of noise present, the important geophysical signals can be enhanced above the background noise levels (Figure 1.13). Details of this are given in the relevant sections of later chapters. However, it is usually better to use a properly designed field technique to optimise data quality in the first instance, rather than relying on post-recording filtering. Further details of field methods are given, for example, by Milsom (2003).

Where a survey with a single instrument lasts longer than a day, it is recommended that a base line is established that can be re-surveyed quickly each day to check on the repeatability of the method. If the sets of data taken on two consecutive days are not similar it suggests there is a problem with the instrument set-up. Also any day-on-day drift of the equipment will become apparent, and this drift will need to be corrected in any subsequent data processing of the combined dataset. Furthermore, the repeatability check also indicates the variations that occur in the data due to the way the instrument is being deployed (different operator, slightly different carrying position, etc.). These differences will help in determining the minimum contour interval that should be selected when displaying the data. For example, if the repeatability check indicates that there is a  $\pm 1$  milliSiemens/m difference on readings, then there is no justification for displaying the data with a 0.5 mS/m contour interval, as this is significantly smaller than the uncertainty in the readings and is not physically significant. It is possible to apply a more statistically rigorous approach and calculate the standard deviation of the data. The minimum contour interval should not be smaller than the standard deviation.